


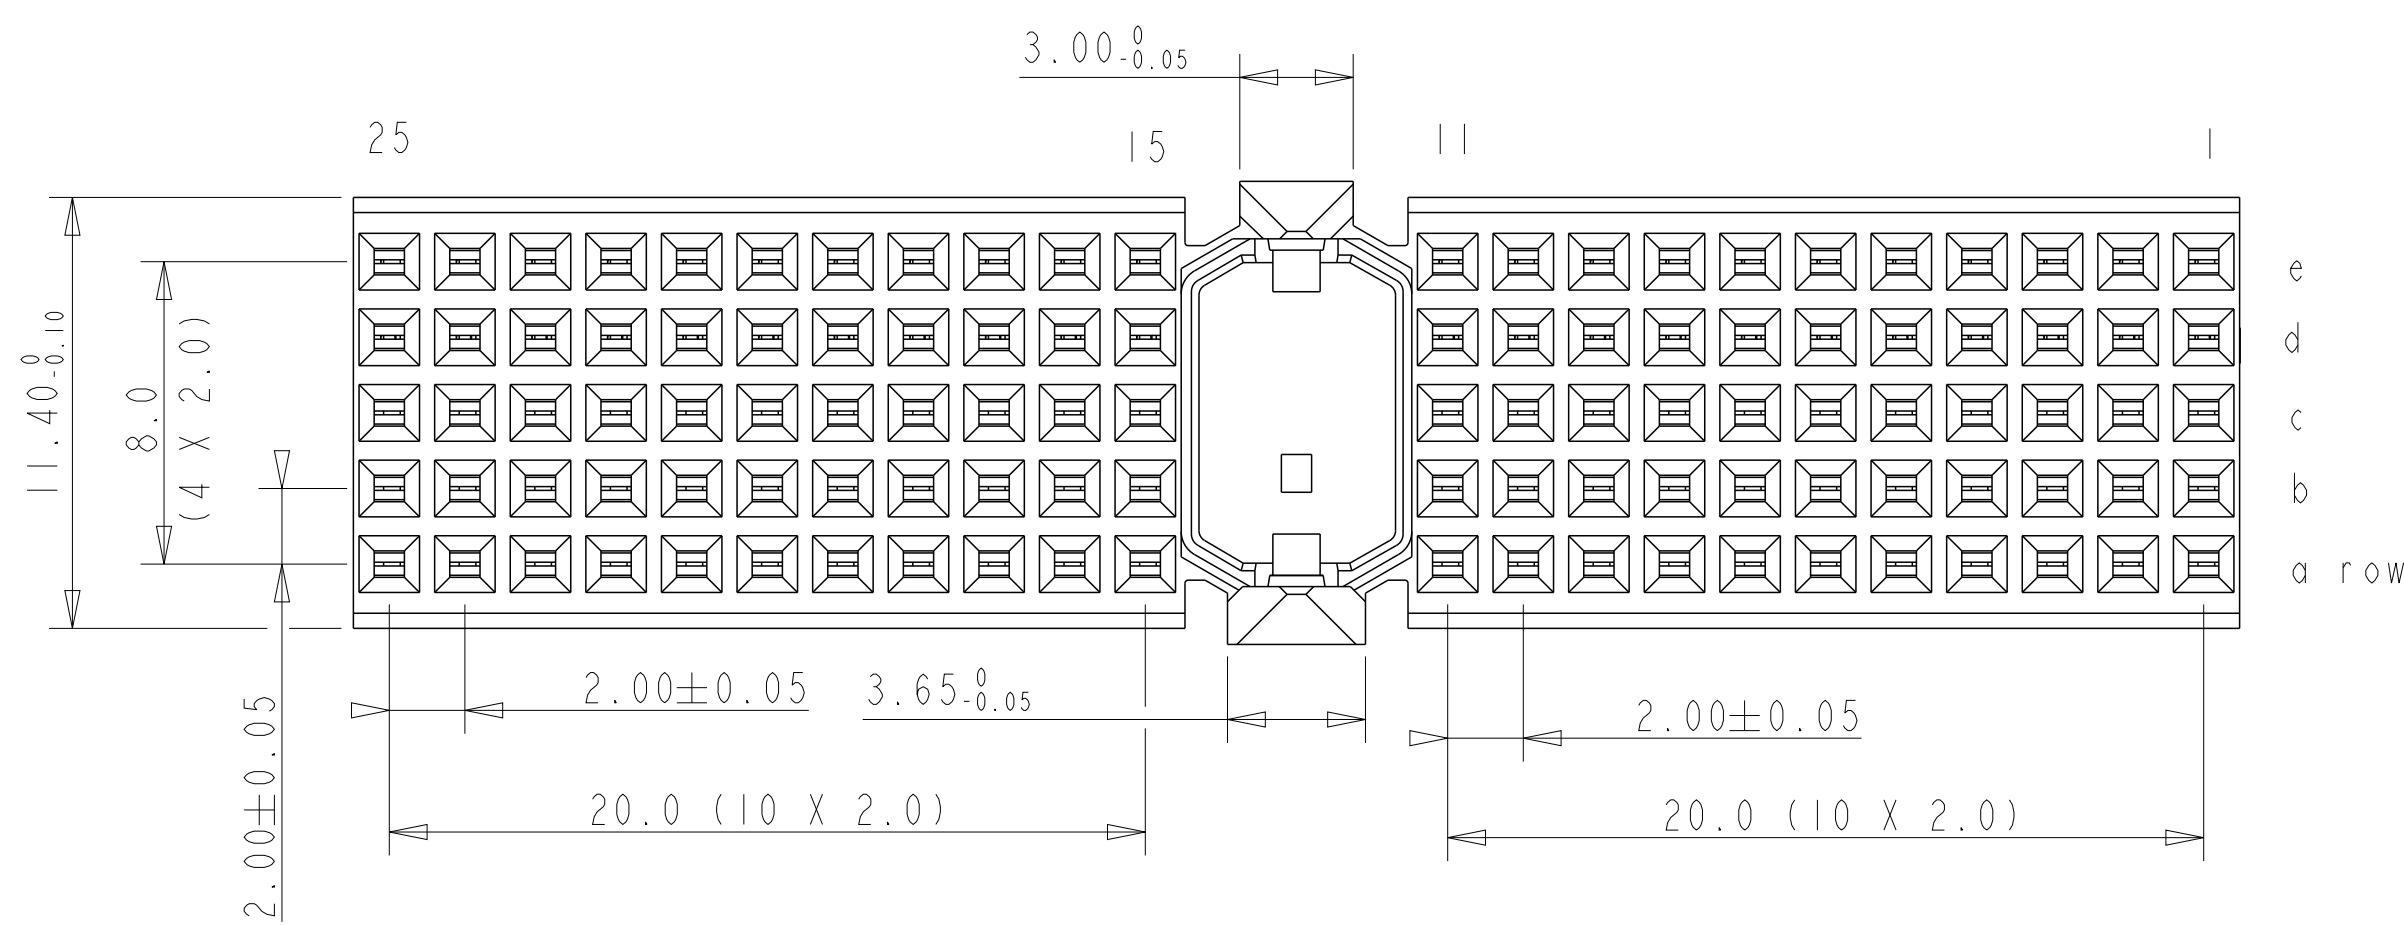


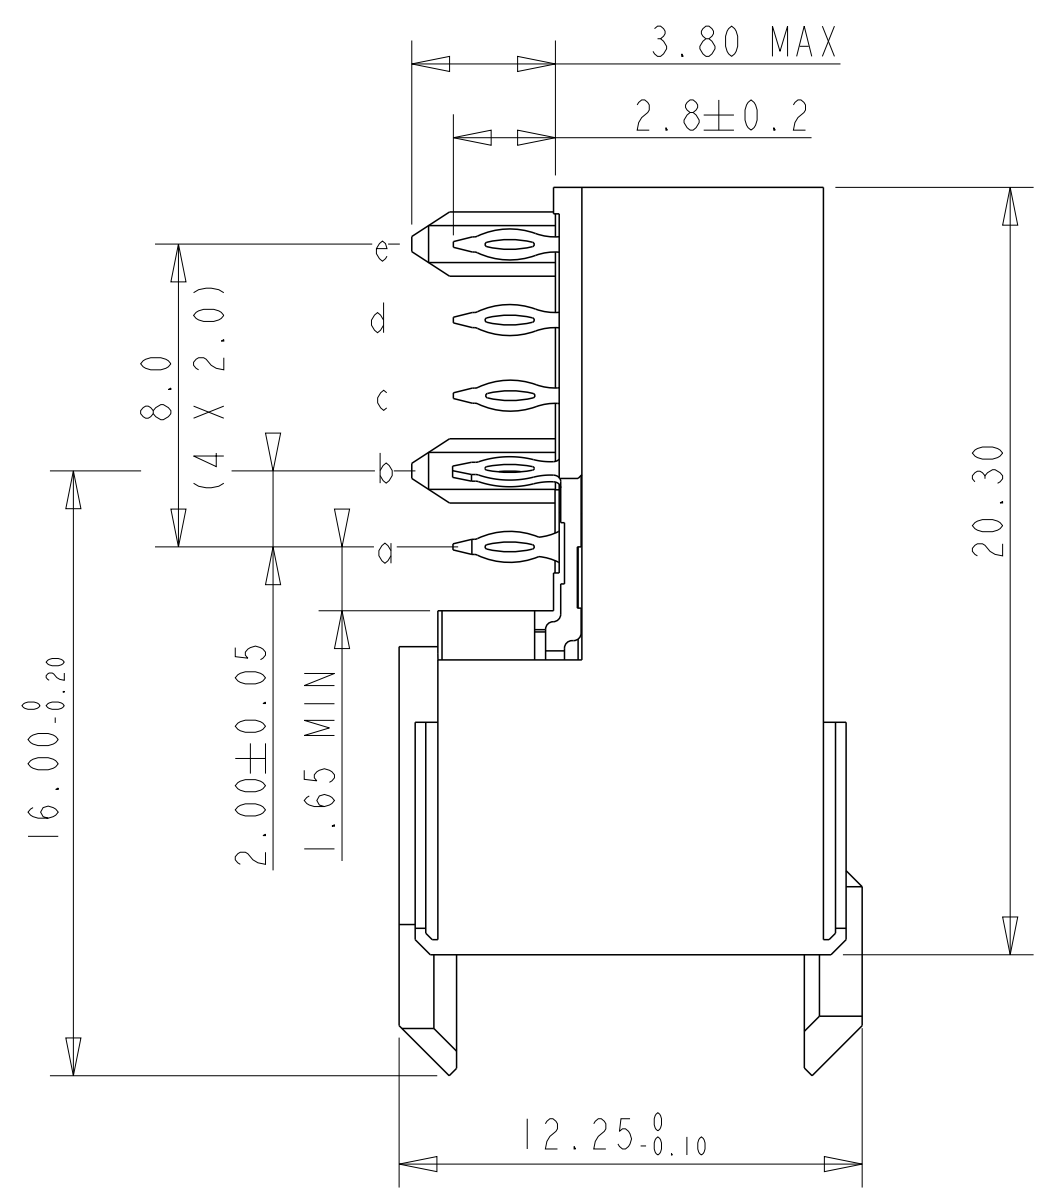

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

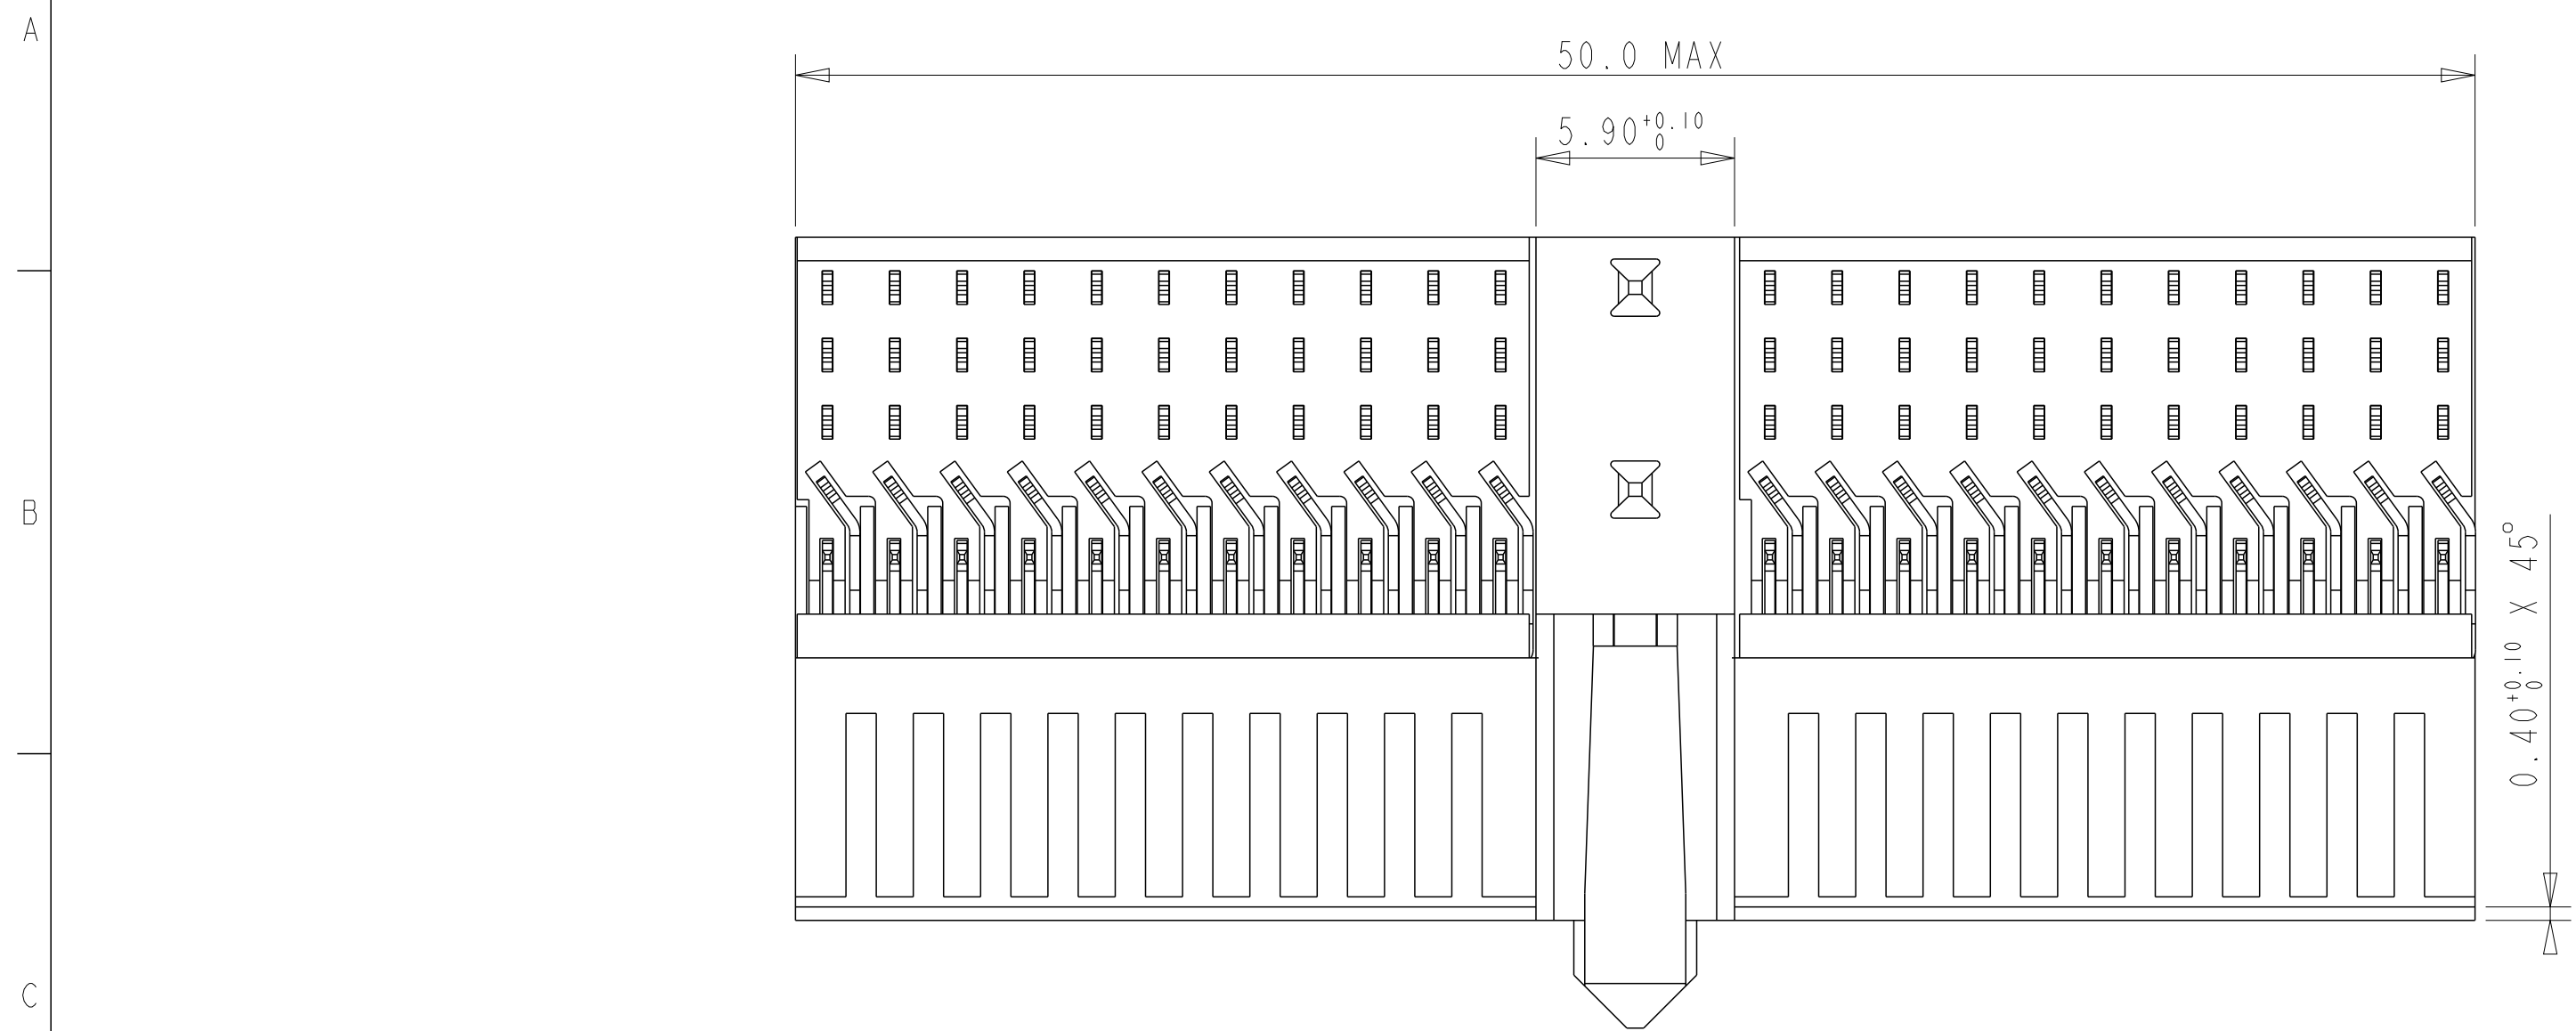

LAY OUT
P.C.B.-HOLE

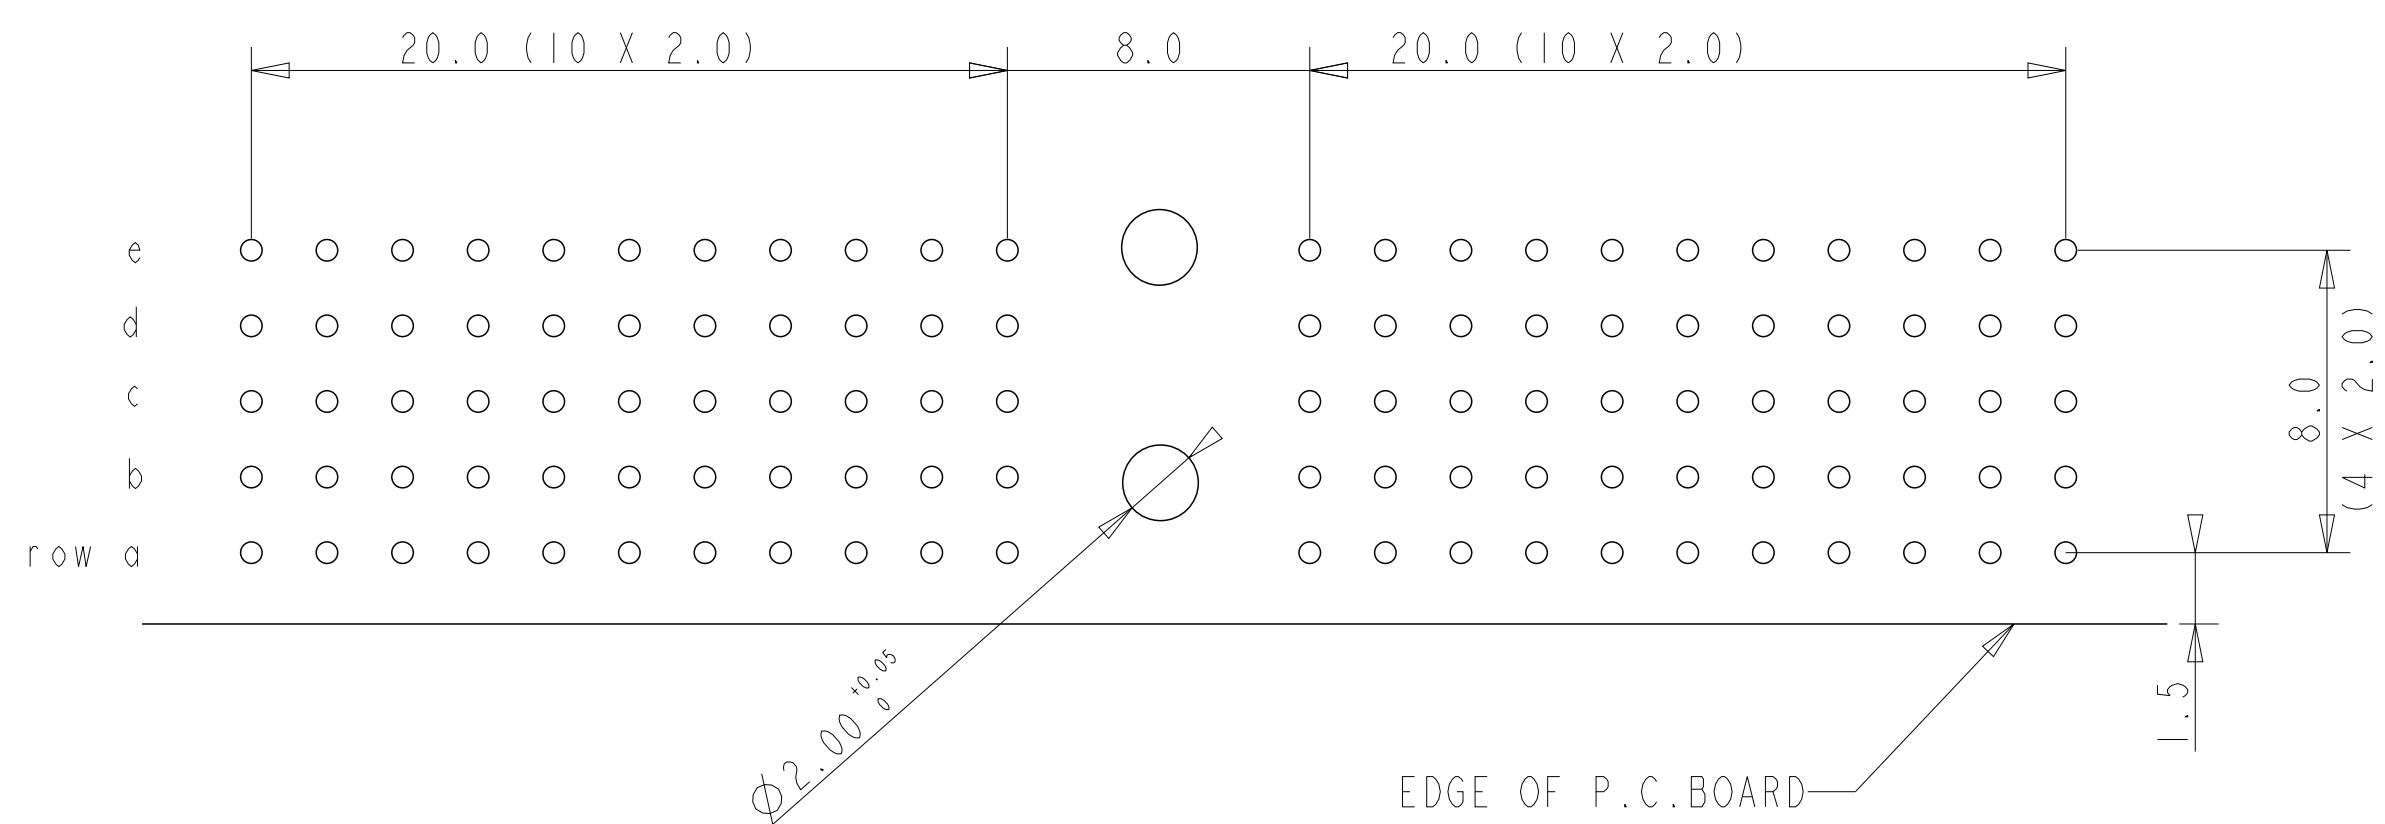

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 mΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ mΩ MIN

NOTES

- LEAD FREE INDICATOR : LF-LEAD FREE
PERFORMANCE LEVEL INDICATOR
(REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNIZED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS,A,201572,001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material				Spec ref			
Ma code				tolerance		projection	
Heat treat				✓		100C ± 0.2 100C 200C ± 0.1 200C ANGLES ± 1° NORMEN	
Plating/Finish				Dr 4 2 92 J.V.B		size	
Emp w wadmin				20060921		AI	
Chr w wadmin				20110417		Scale	
Appr				Product family MILLIPACS		ECN	
				Model Name HM2R01PA5100		PCAR 0239	
				Model Revision		REL Level	
				MPACS 5+2R RA RCP CONN TYPE A		Released	
				BS,C,201418,001		Rev.	
				HM2R01PA5100---		CUSTOMER DRAWING	
				sheet 1 of 1			