


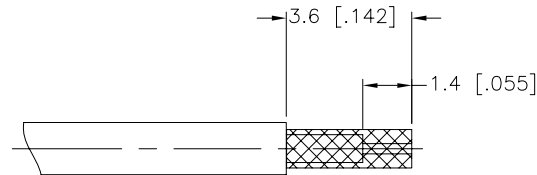
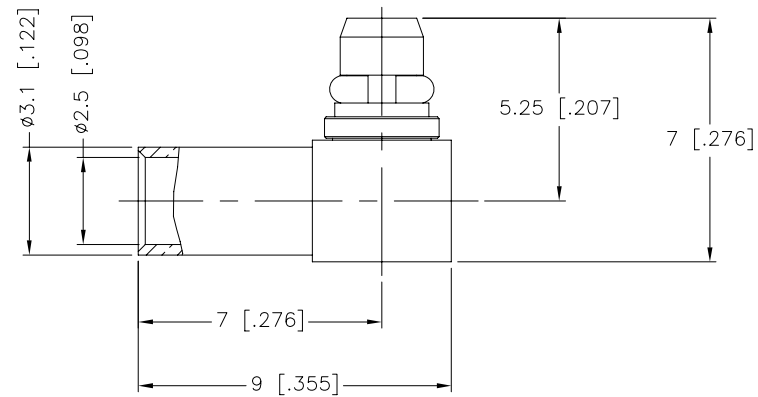


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/20/09	XXXXXX	INITIAL RELEASE

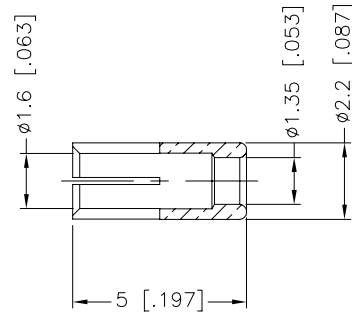

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex						
						DRAWN	M.ZHANG	04/20/09								
7	COVER	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	CHECKED			PART DESCRIPTION MMCX R/A CRIMP PLUG (FOR 1.37mm CABLE)							
6	INSULATOR	PTFE	NATURAL	1		ISSUED										
5	INNER FERRULE	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 262147							
4	RETAINER RING	BER. COPPER	GOLD	1												
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE	C:/CONNEX/262147.DWG		DWG. NO.		262147.DWG	REV.	NC	SIZE	A	SCALE
2	INSULATOR	PTFE	NATURAL	1	DO NOT SCALE DRAWING											
1	BODY WITH HOUSING	BRASS	GOLD	1												
DESCRIPTION		MATERIAL	FINISH	QTY												