
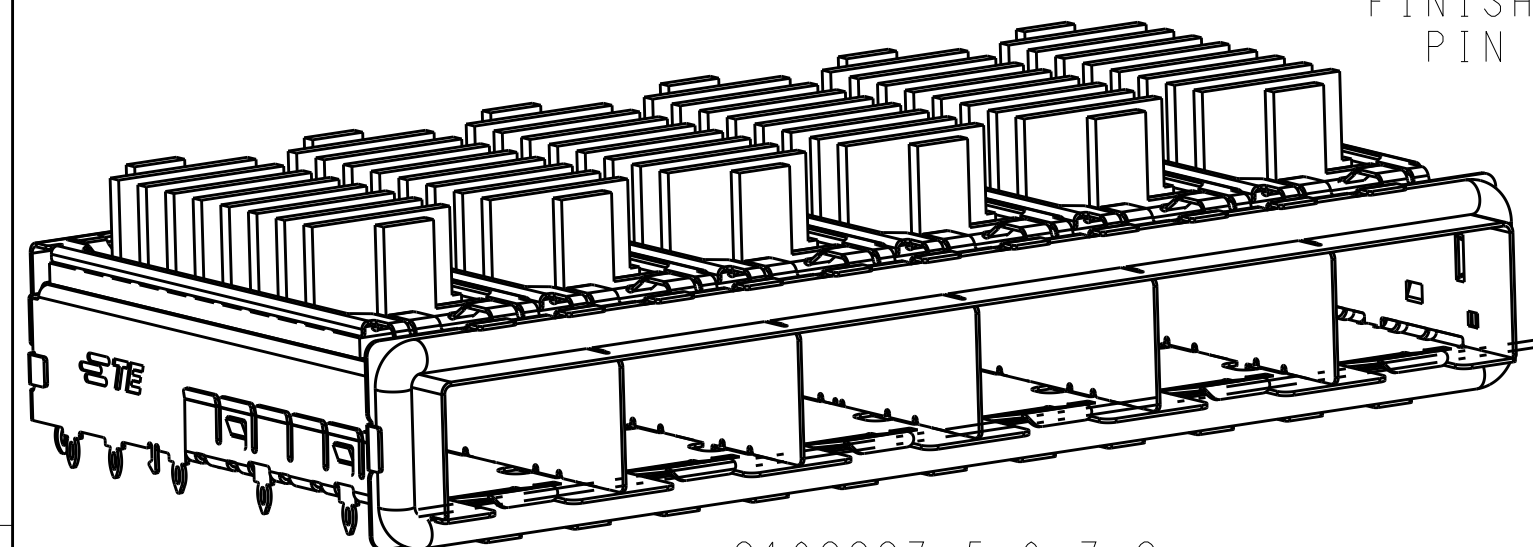


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A	RELEASED PER ECO-12-013192	06SEP2012	BMM	MRS
					A1	RELEASED PER ECO-13-014600	11SEP2013	PP	SH

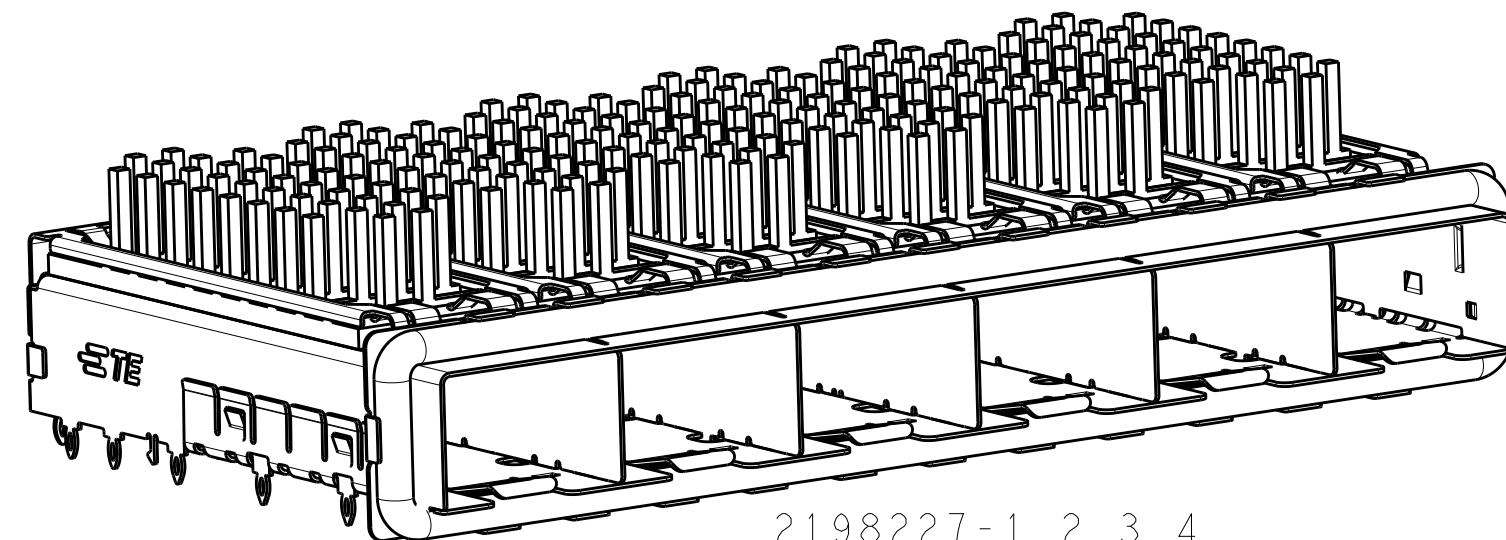

⚠ MATERIAL :
CAGE ASSEMBLY: NICKEL SILVER ALLOY, 0.25mm THICK.
GASKET RETENTION PLATE: STAINLESS STEEL
EMI GASKET: PLATED FILLED SILICONE
HEATSINK CLIP: STAINLESS STEEL
HEATSINK: ALUMINUM

△ 2 FINISH:
HEATSINK: ELECTROLESS NICKEL
HEATSINK CLIP: PASSIVATE

△ 3 PADS AND VIAS CHASSIS GROUND.

4. INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OF ASME Y14.5M-1994.

5. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.

△ HOLE PATTERN REPEATS FOR EACH PORT. SPACING BETWEEN PORTS IS 14.25mm.

 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.

8 REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.




9 REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.

△ MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.50



11. CERTAIN MATING TRANCEIVERS MAY REQUIRE ADDITIONAL PCB THICKNESS THAT WOULD BE DETERMINED BY THE CUSTOMER.

12. PRODUCT COMPLIES WITH SPECIFICATION SFF-8433 IMPROVED PLUGGABLE FORM FACTOR FOR SFP+ GANGED CAGES.

③ DIMENSION APPLIES PRIOR TO INSERTION OF SFP MODULE.

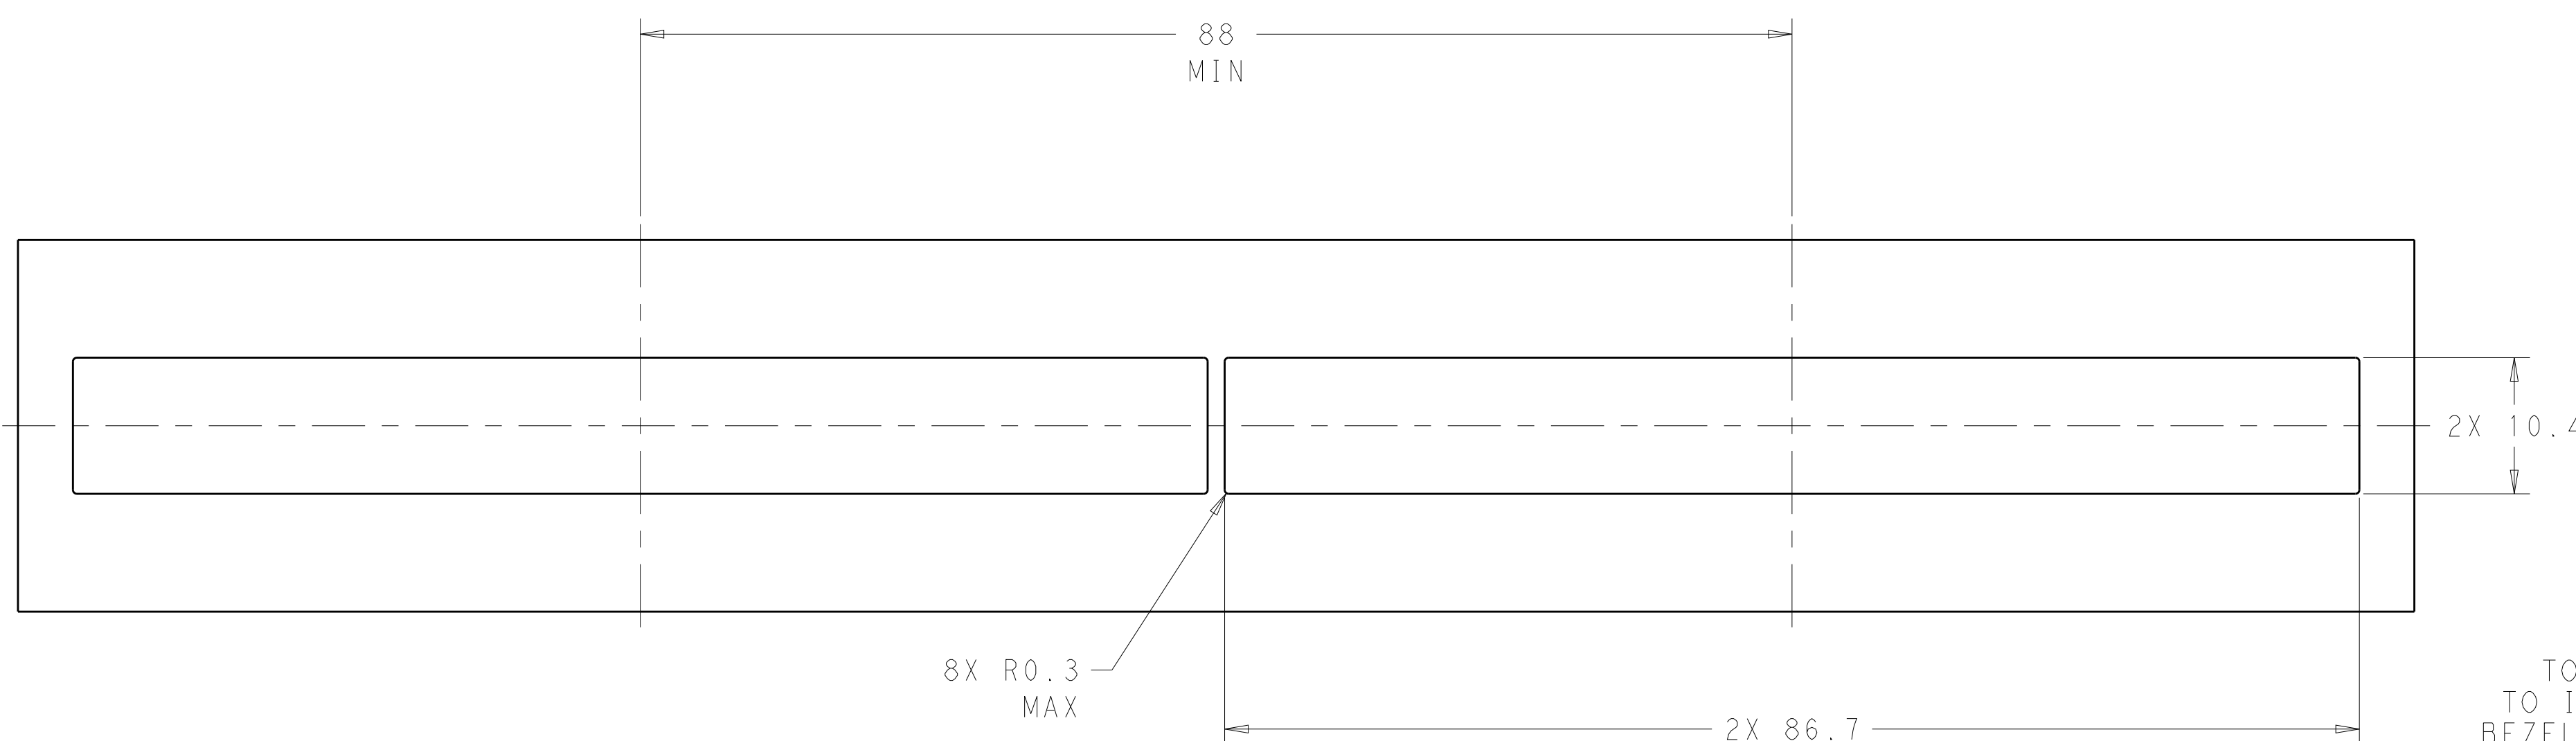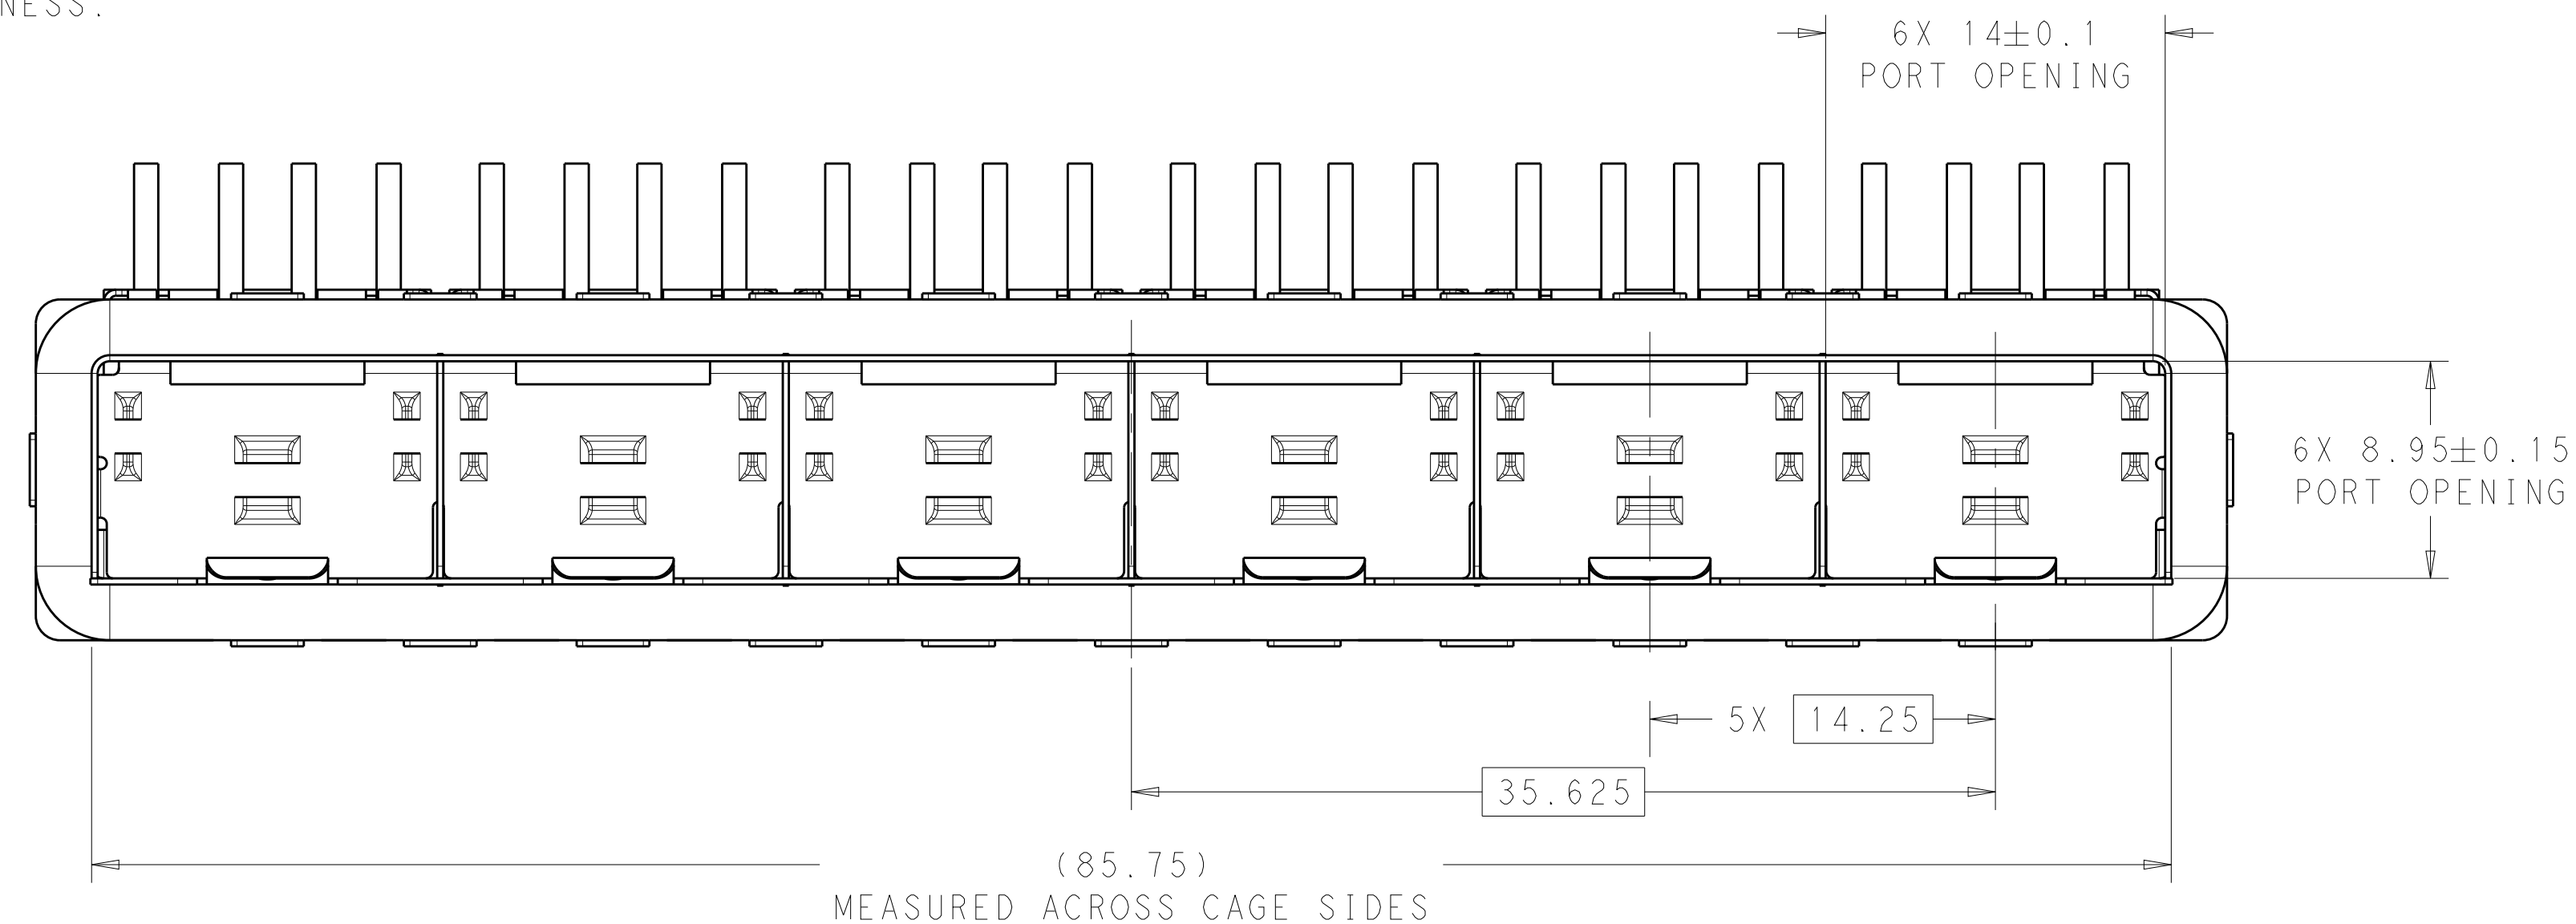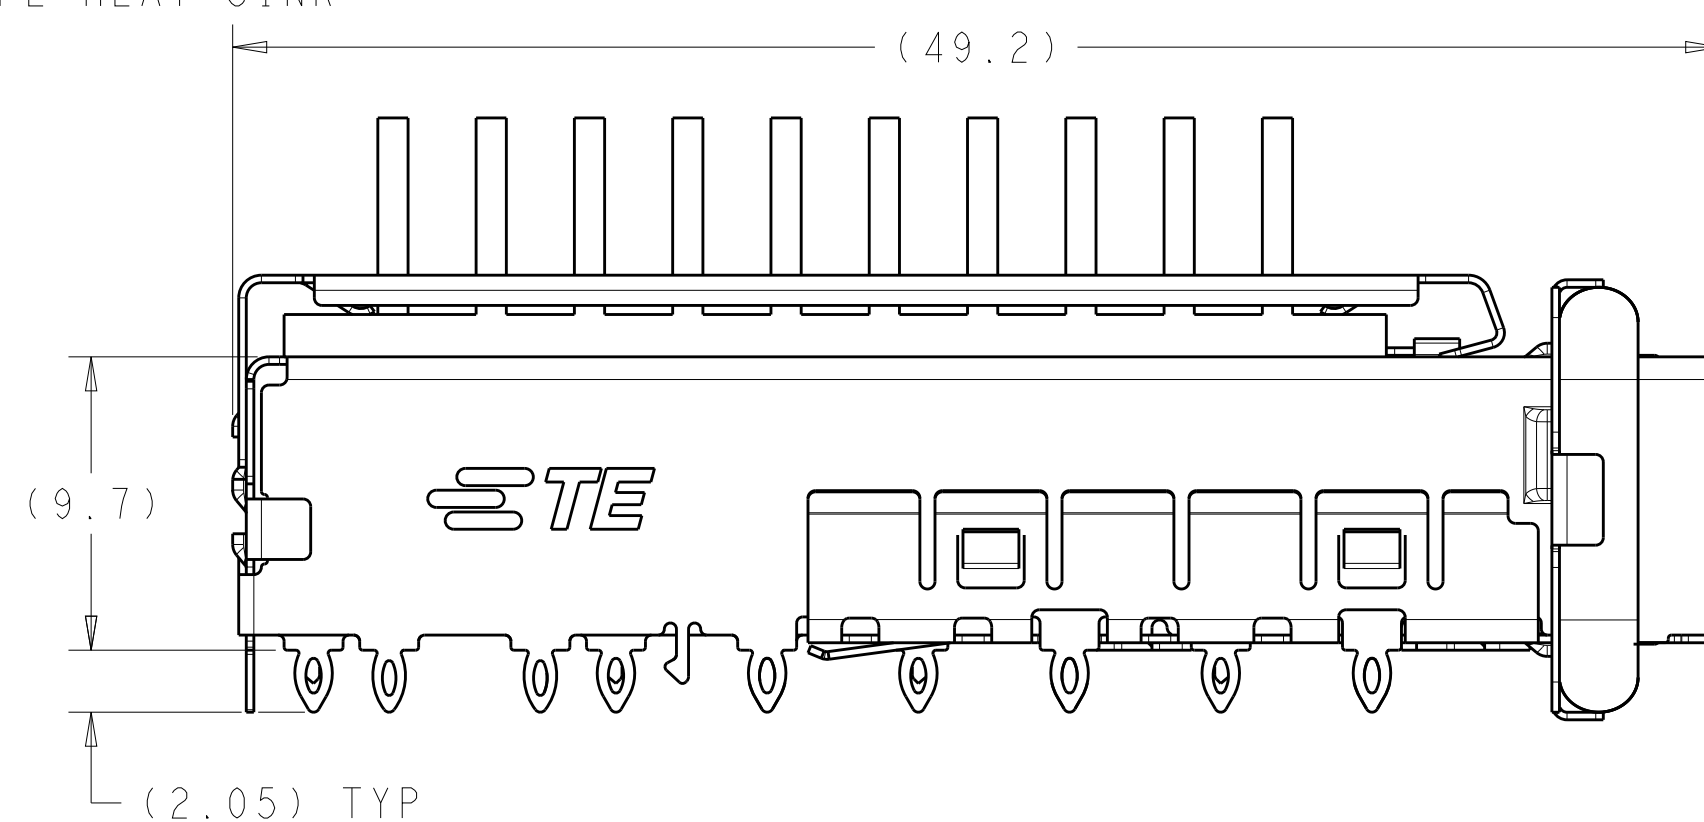



RECOMMENDED BEZEL CUT-OUT
SINGLE SIDED APPLICATIONS
SCALE 5:2

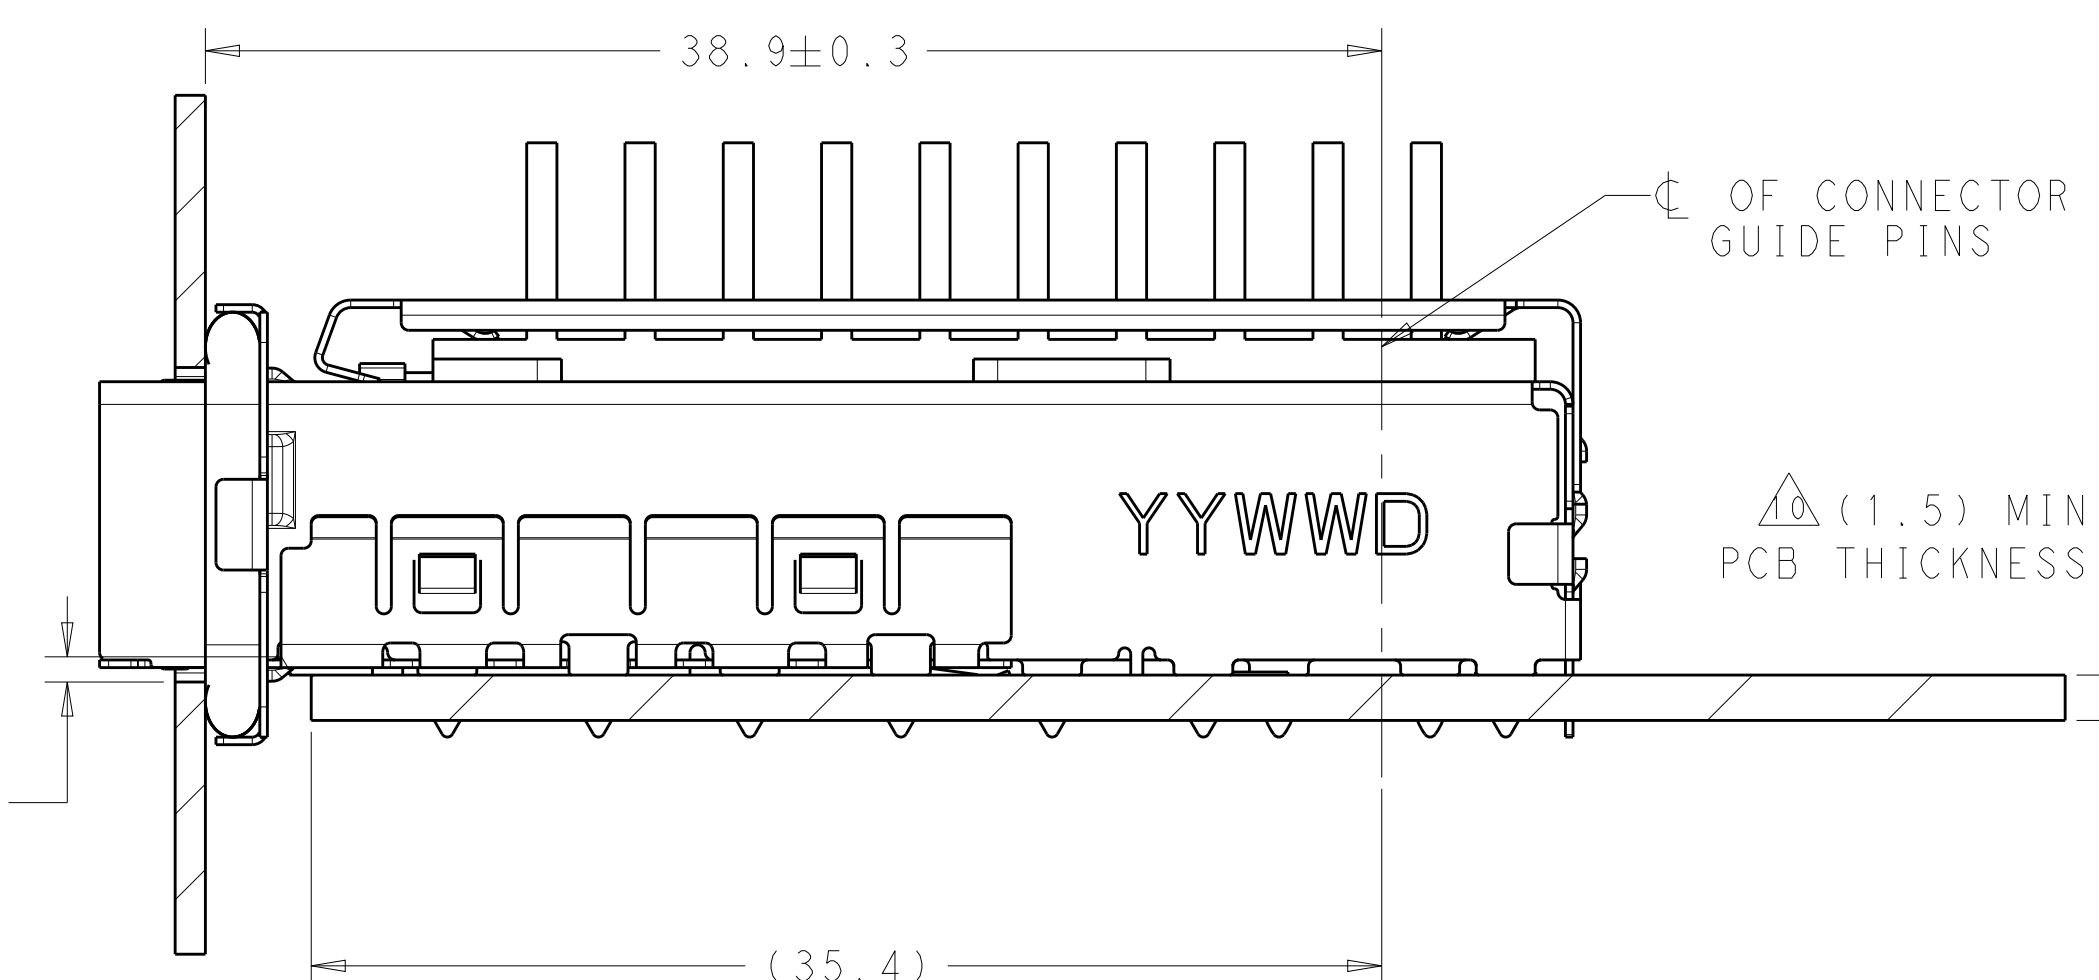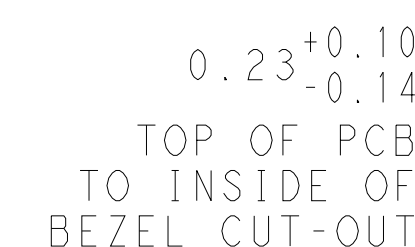

2198227
MOUNTED ON PC BOARD
SHOWN THRU RECOMMENDED BEZEL

FIN TYPE	22.5	NETWORKING, TALL	2198227-8
FIN TYPE	18.1	NETWORKING, SHORT	2198227-7
FIN TYPE	15.5	SAN	2198227-6
FIN TYPE	13.2	PCI	2198227-5
PIN TYPE	22.5	NETWORKING, TALL	2198227-4
PIN TYPE	18.1	NETWORKING, SHORT	2198227-3
PIN TYPE	15.5	SAN	2198227-2
PIN TYPE	13.2	PCI	2198227-1
HEAT SINK	A MAX	APPLICATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MATTHEWS CHK M. SCHMITT APP'D M. SCHMITT	250C12011 250C12011 250C12011	 TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME SFP+ ENHANCED 1X6 CAGE ASSEMBLY PRESS FIT, EMI GASKET WITH HEATSINK	PRODUCT SPEC 108-2364 APPLICATION SPEC 114-13120		
	0 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1 ANGLES ±1°	SIZE A1	CAGE CODE 00779	DRAWING NO. C=2198227	RESTRICTED TO
MATERIAL 	FINISH 	WEIGHT -	Customer Drawing SCALE 4:1 SHEET 1 OF 2 REV. A		

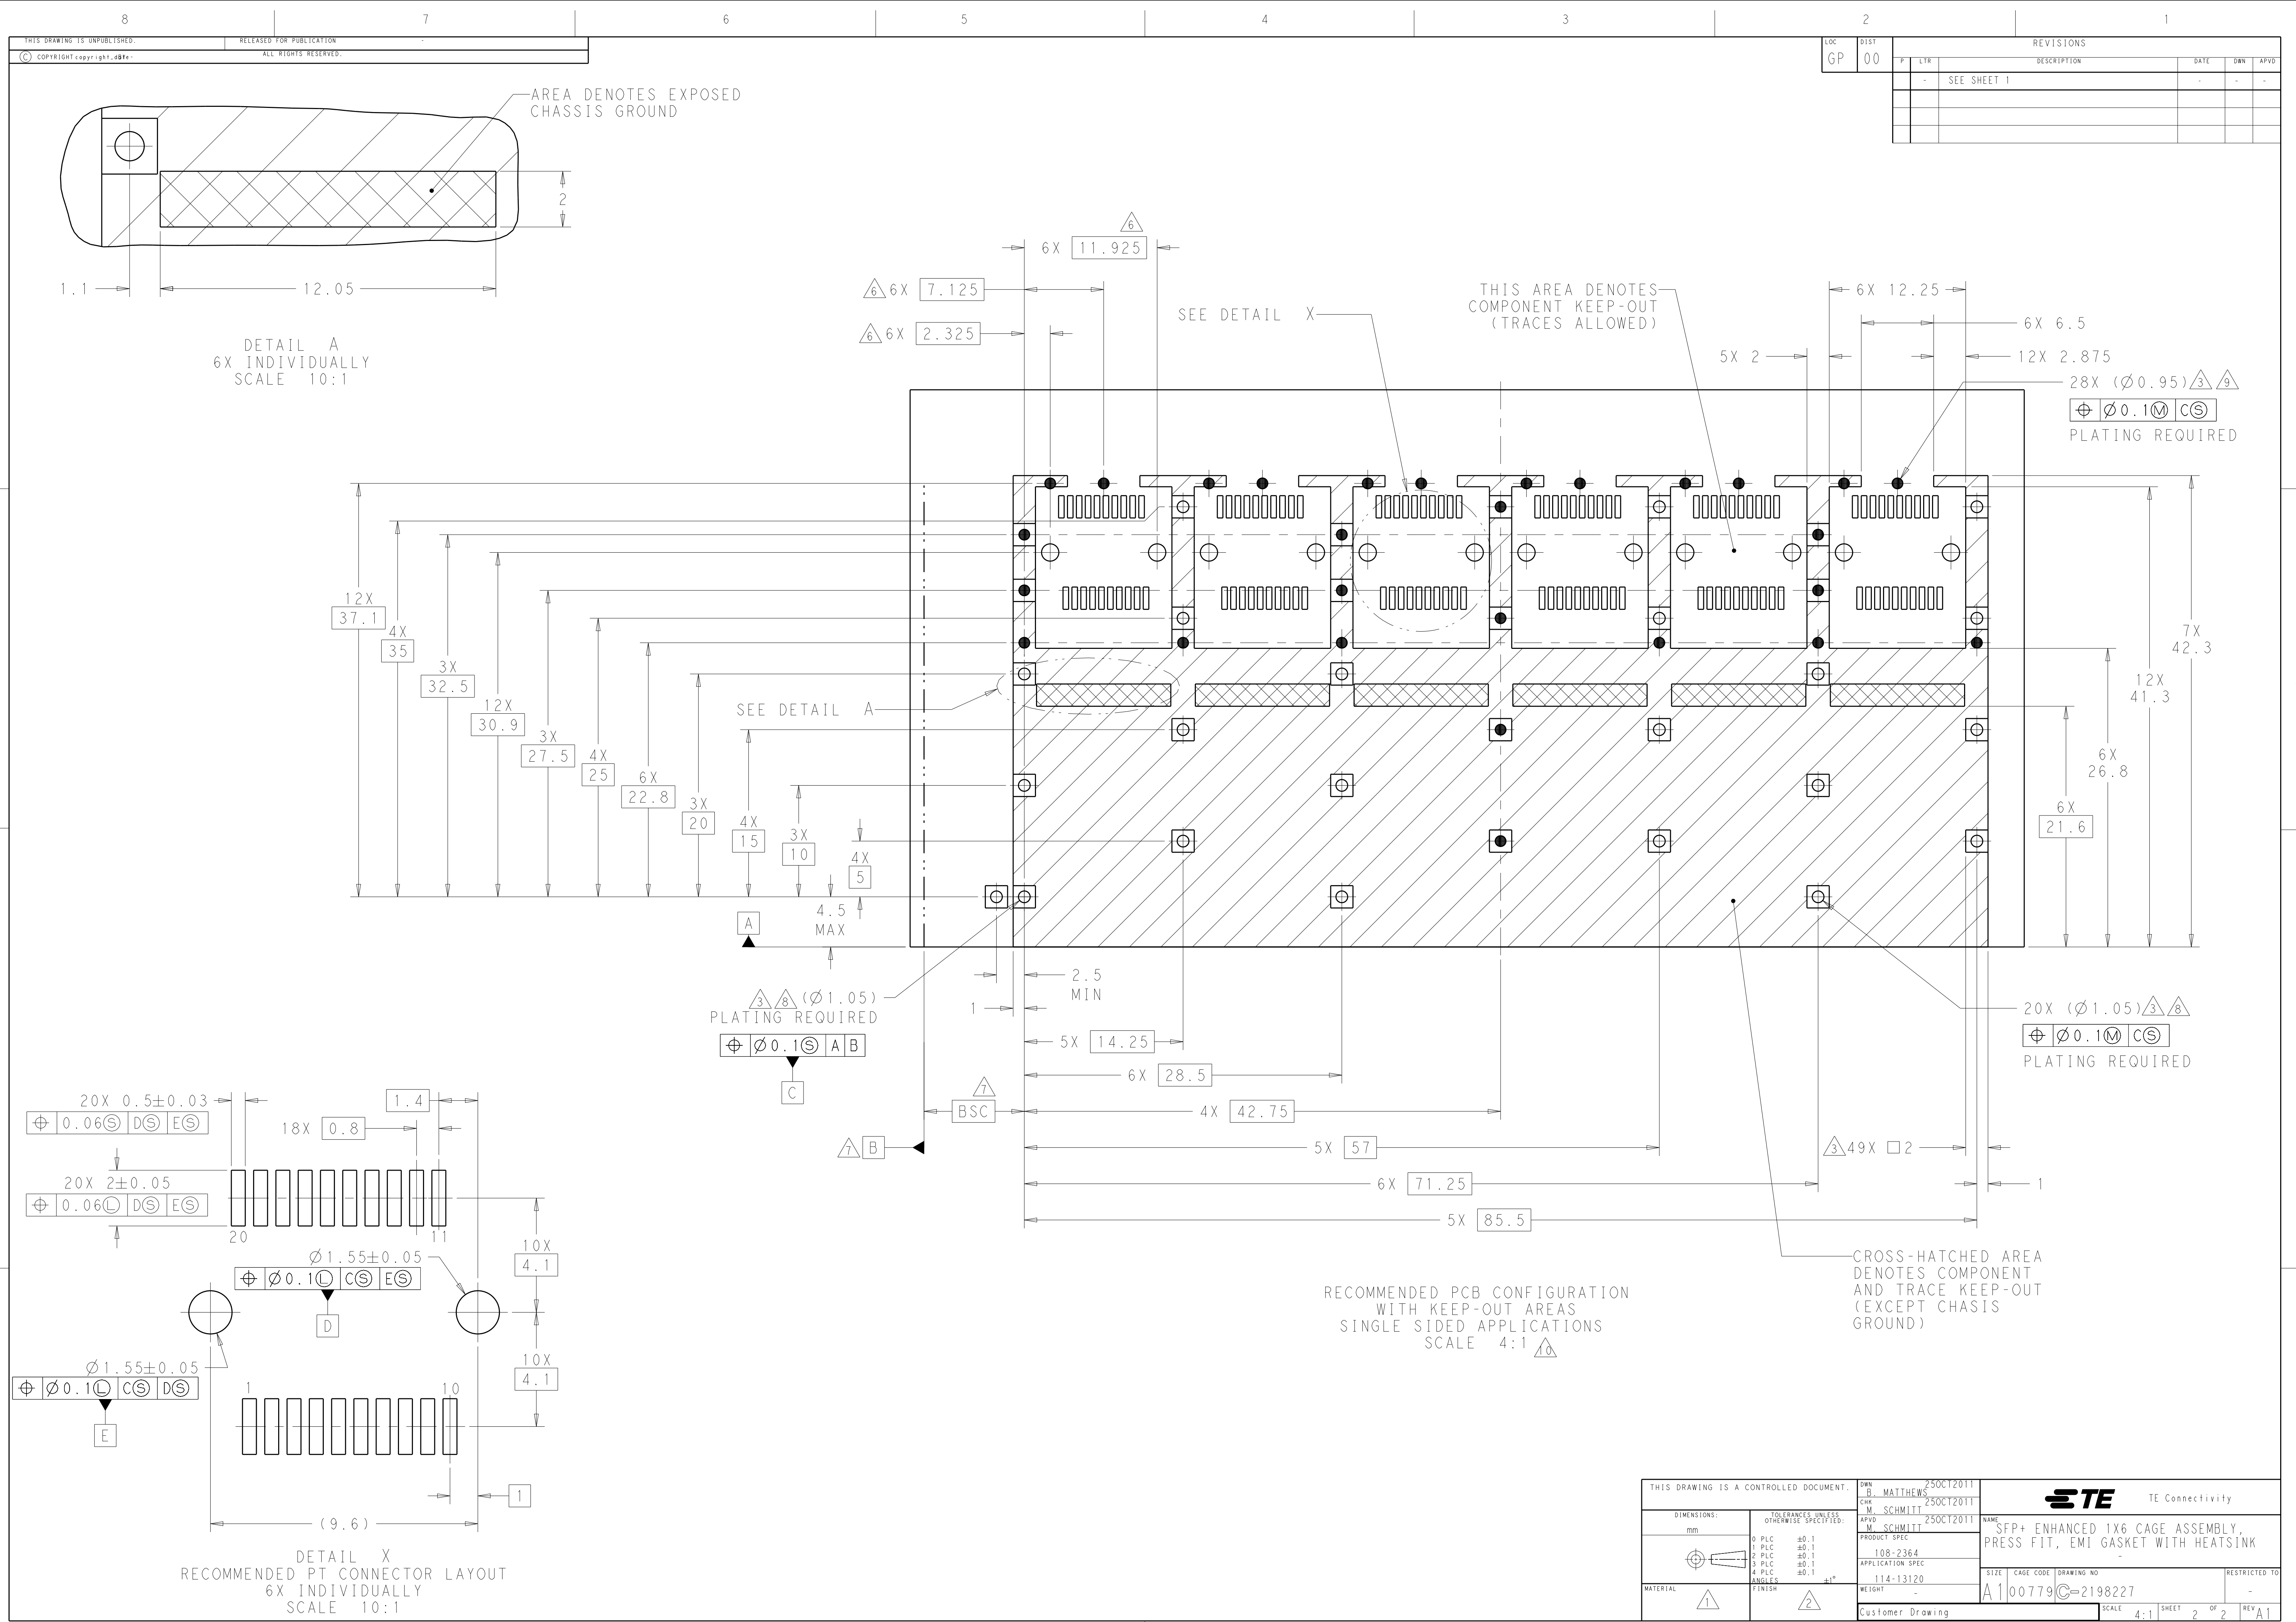

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PLC	PLC	PLC	PLC	PLC	PLC
0	1	2	3	4	5
±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

ANGLES FINISH

MATERIAL

1

2

Customer Drawing

DWN B. MATTHEWS 25OCT2011

CHK M. SCHMITT 25OCT2011

APVD W. SCHMITT 25OCT2011

PRODUCT SPEC

108-2364

APPLICATION SPEC

114-13120

WEIGHT

Customer Drawing

SCALE 4:1

SHEET 2 OF 2

REV A1

TE Connectivity

SFP+ ENHANCED 1X6 CAGE ASSEMBLY, PRESS FIT, EMI GASKET WITH HEATSINK

SIZE CAGE CODE DRAWING NO

A100779C=2198227

RESTRICTED TO