


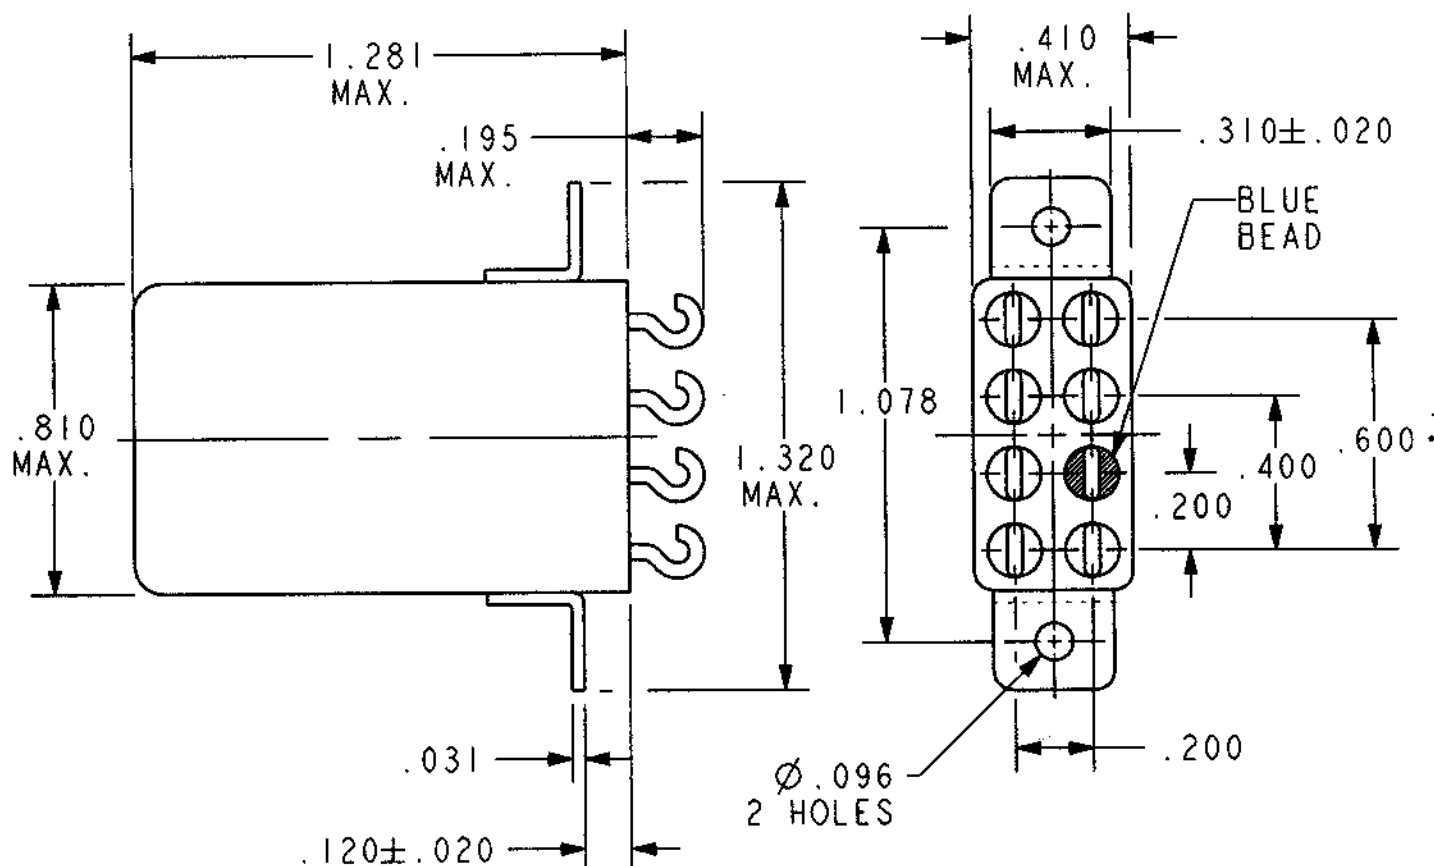

REV. 0

DCO 17223

COIL: @ 25°C
 RESISTANCE 2500 OHMS ± 10%
 NOMINAL VOLTAGE 11.2 mADC
 MUST OPERATE 5.6 mADC
 MUST RELEASE 0.6 mADC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's - 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX.
 RELEASE 3 MS MAX.
 CONTACT BOUNCE 3 MS MAX.

CUST. HI-G
 CUST. NO. 2BCN-1E-128 REV.

"SF" RELAY

CUSTOMER DATA SHEET

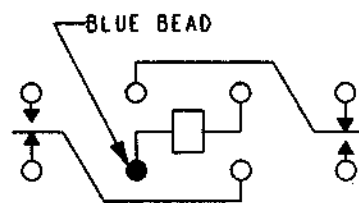

TERMINAL VIEW

CONTACT RATING: 5A 30 VDC
 3A 115 VAC 400 Hz RESISTIVE,
 100,000 OPERATIONS

DR. B.D. 8/24/01 CK. TLG 8-24-01

CII Technologies
 advanced control electronic solutions

SF5A5105J02