

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

©

COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD




F

REVISED SHELL MATERIAL



18MAY16

BL

J.L

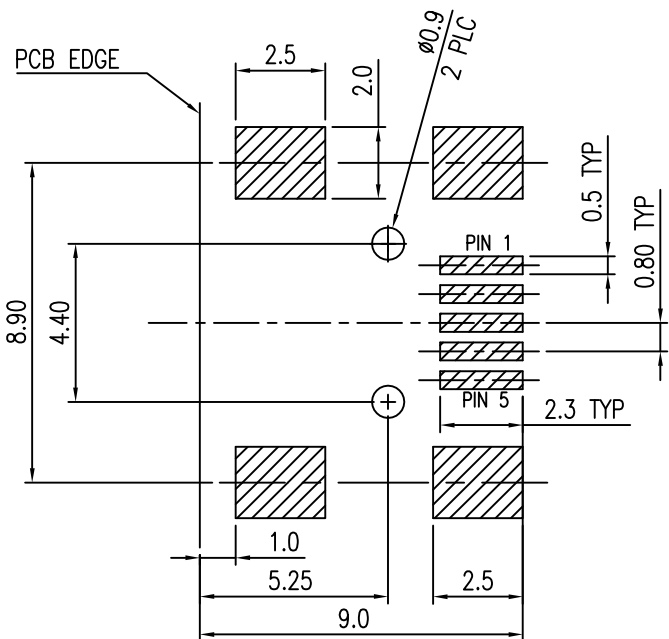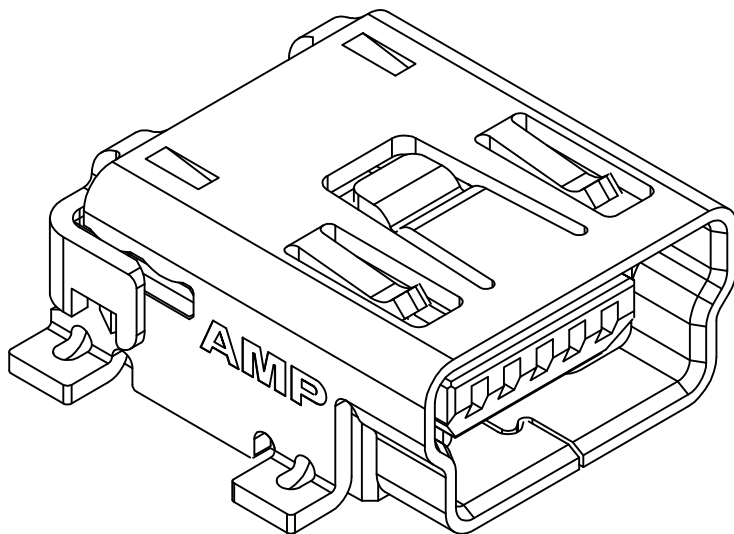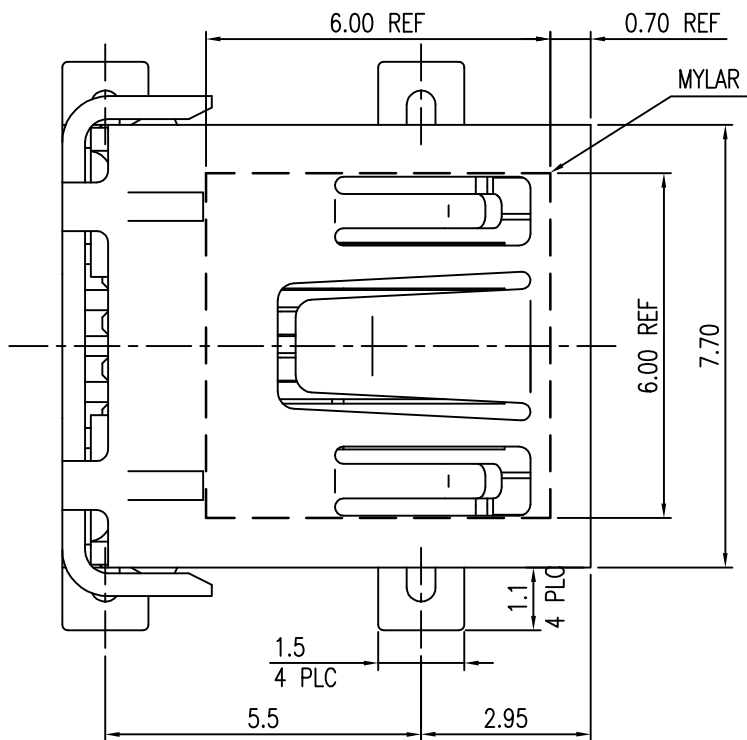

RECOMMENDED PCB LAYOUT (MOUNTING SIDE)
THICKNESS 1.57mm (TOLERANCE: ±0.05)

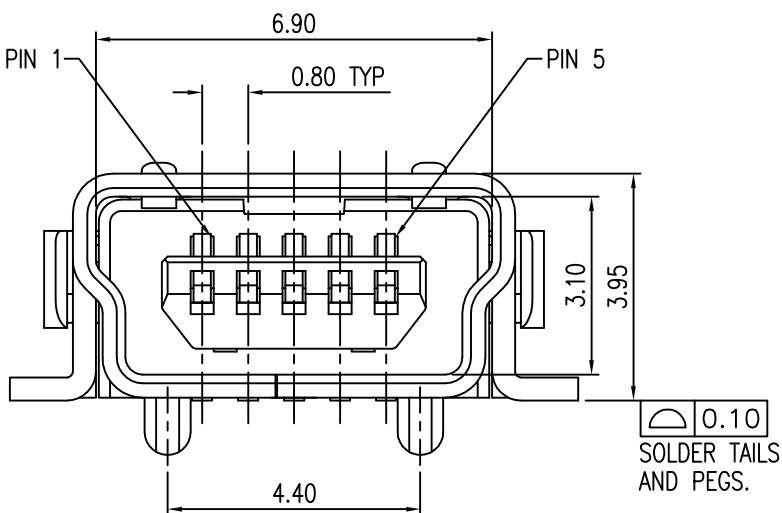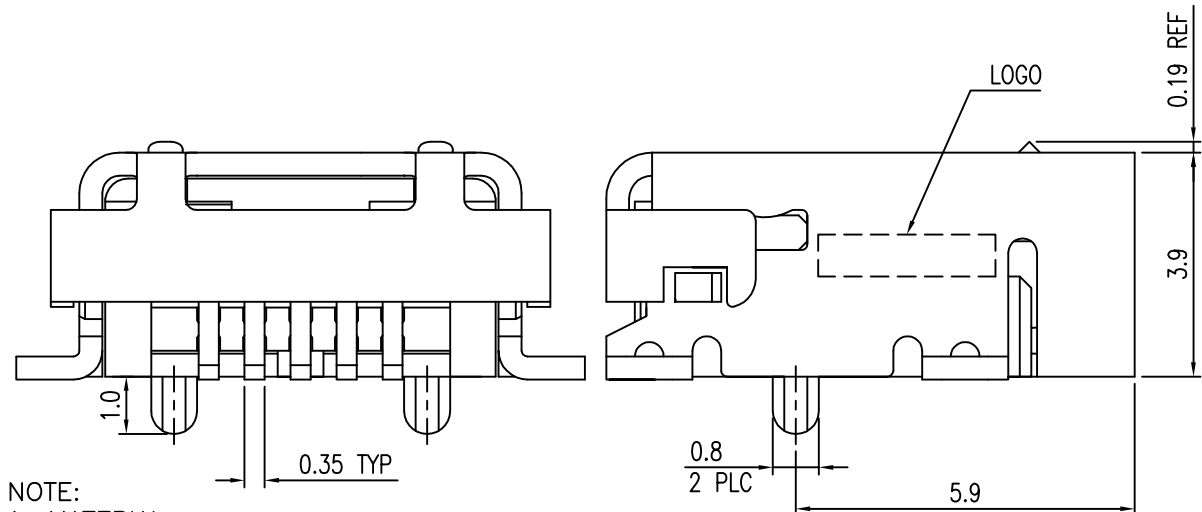


NOTE:

- MATERIAL:
HOUSING: PA9T WITH 33% GF, UL 94V-0, COLOR: SEE TABLE.
CONTACTS: PHOSPHOR BRONZE.
SHELL: SUS304, THICKNESS=0.40MM.
MYLAR: POLYAMIDE FILM.
- FINISH:
CONTACTS: GOLD FLASH OVER
0.762µm [30µ"] MIN. PALLADIUM-NICKEL PLATED ON CONTACT AREA,
2.54µm [100µ"] MIN. MATTE-TIN ON SOLDER TAIL,
2.54µm [100µ"] MIN. MATTE-TIN ON SOLDER TAIL,
3.05µm [120µ"] MIN. MATTE-TIN ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
SHELL: 1.27µm [50µ"] MIN. NICKEL PLATED OVERALL.
0.76µm [30µ"] MIN. MATTE-TIN OVER 1.27µm [50µ"] MIN. NICKEL.
- NO DATECODE ON PRODUCT SURFACE.
- REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC.
109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± 0.38
1 PLC ± 0.25
2 PLC ± 0.13
3 PLC ± 0.05
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

DWN O. HU 21DEC2007

CHK S. HOU 21DEC2007

APVD W. KODAMA 21DEC2007

PRODUCT SPEC

108-57062

QUALIFICATION TEST REPORT

501-57070

WEIGHT

--

CUSTOMER DRAWING

NAME

TE

TE Connectivity

MINI USB, R/A, SMT, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734035

SCALE

SHEET

1 of 4

REV

F

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE




DWN

APVD

SEE SHEET 1.

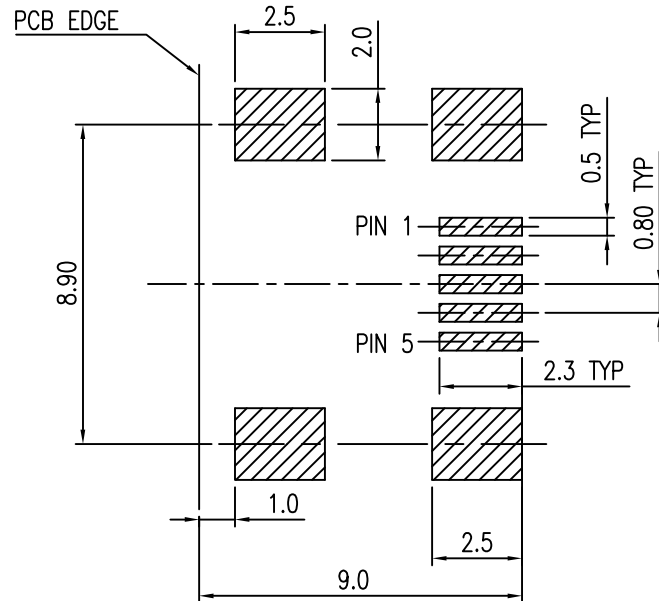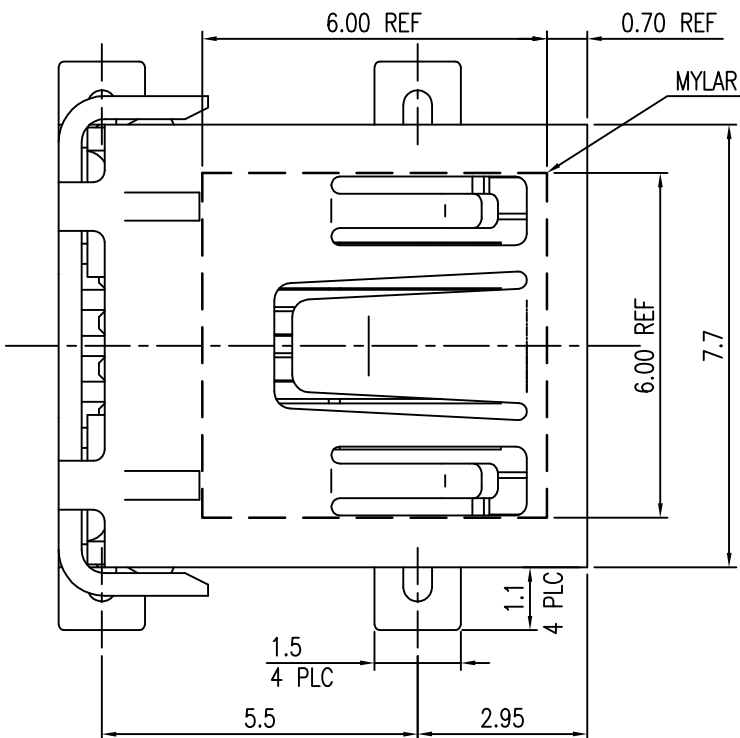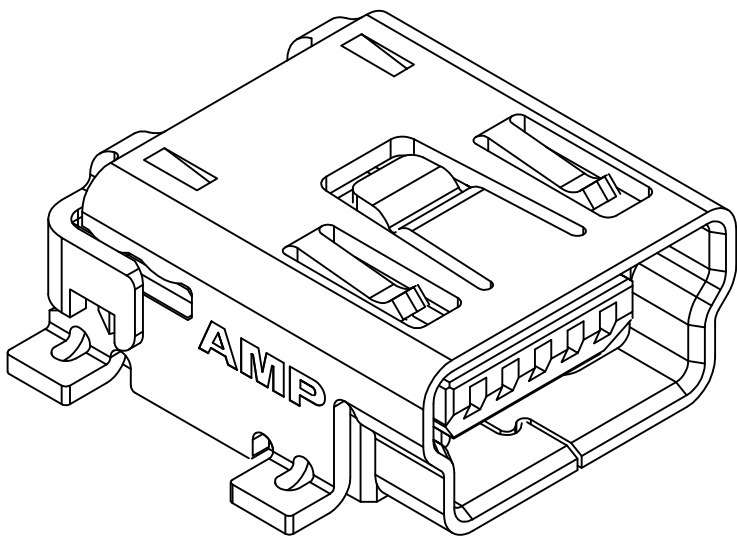

RECOMMENDED PCB LAYOUT (MOUNTING SIDE)
THICKNESS 1.57mm (TOLERANCE:±0.05)

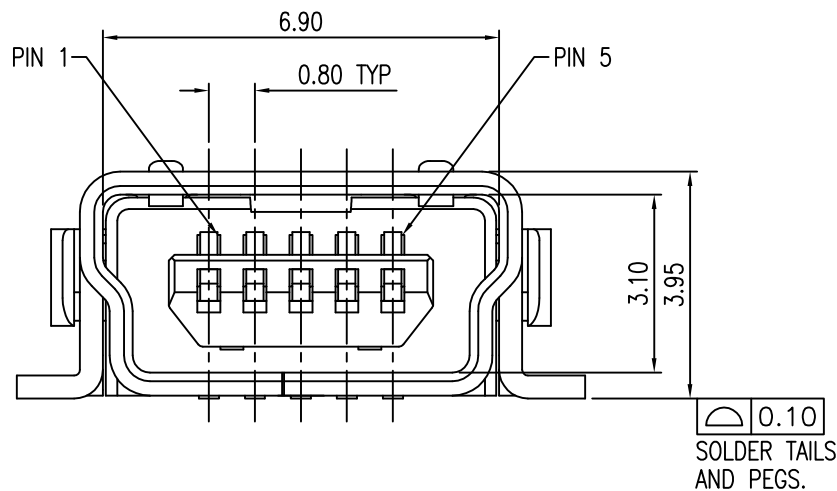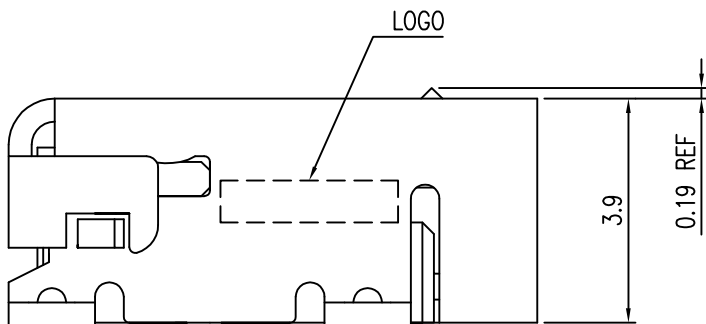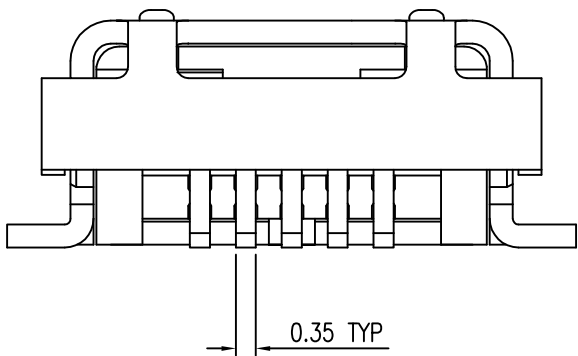

NOTE:

- MATERIAL:
HOUSING: PA9T WITH 33% GF, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: SUS304, THICKNESS=0.40MM.
MYLAR: POLYAMIDE FILM.
- FINISH:
CONTACTS: GOLD FLASH OVER
0.762μm [30μ"] MIN. PALLADIUM-NICKEL PLATED ON CONTACT AREA,
2.54μm [100μ"] MIN. MATTE-TIN ON SOLDER TAIL, WITH
ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATED OVERALL.
- NO DATECODE ON PRODUCT SURFACE.
- REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC.
109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

MINI USB, R/A, SMT, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734035

SCALE

SHEET

2 of 4

REV

F

4

3

2

1

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

© COPYRIGHT


BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC DW	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

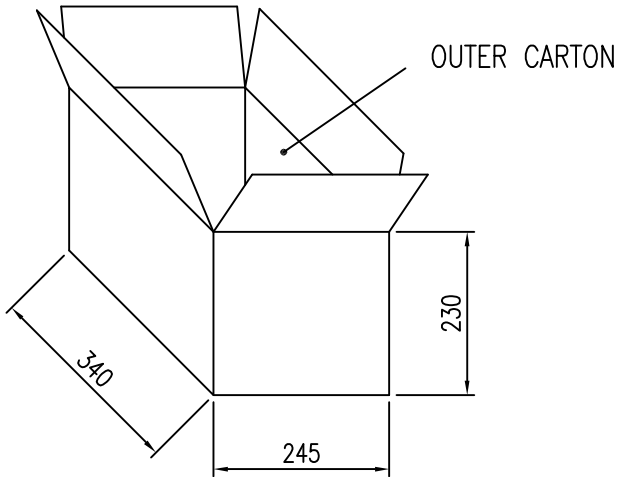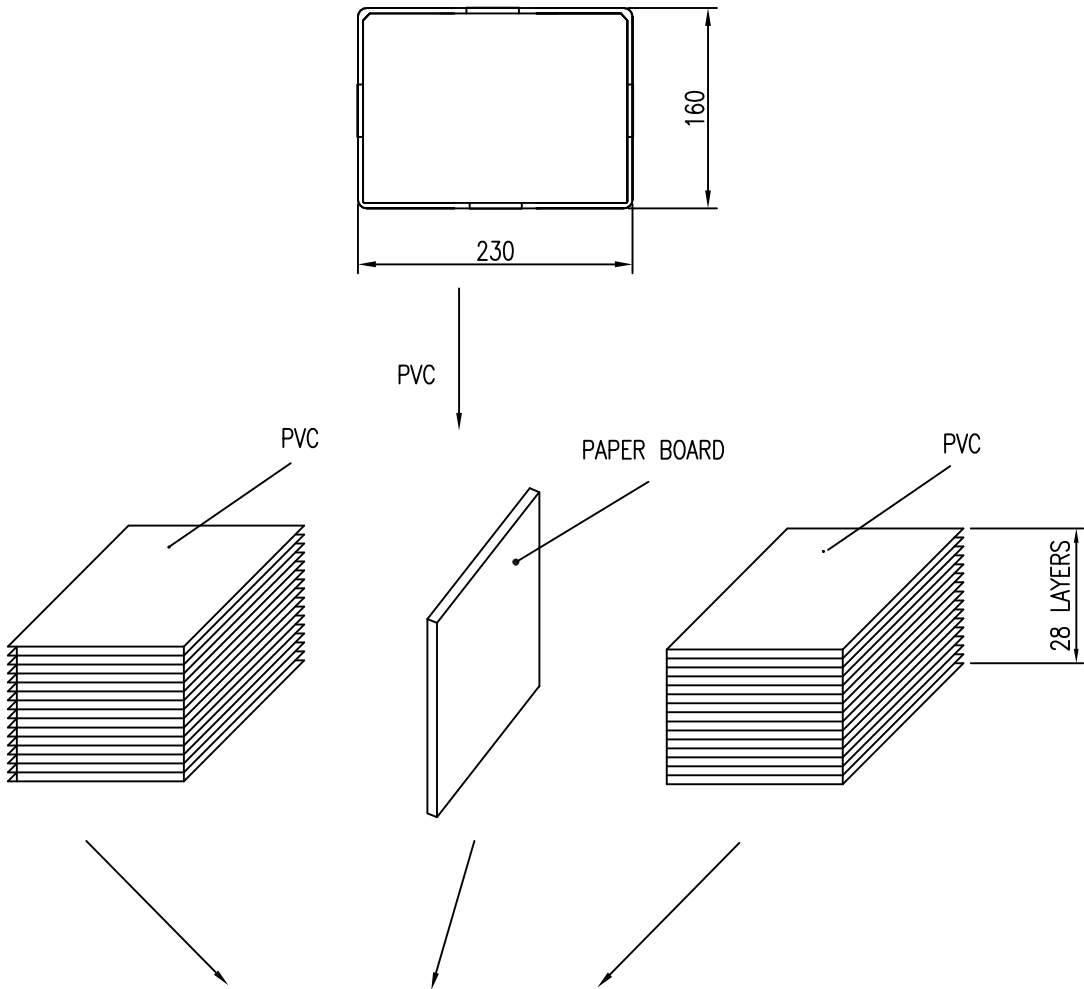





8.25 Kg	5.55 Kg	150	56	8400 PCS	2-1734035-1
					1-1734035-1
					1734035-1
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity							
		CHK									
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME							
				APVD							
		PRODUCT SPEC		MINI USB, R/A, SMT, B TYPE							
		APPLICATION SPEC									
MATERIAL		FINISH		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
				WEIGHT		A3		00779		C=1734035	
				CUSTOMER DRAWING				SCALE		SHEET	
								—		3 of 4	
										REV F	


— , —

ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS					
DW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

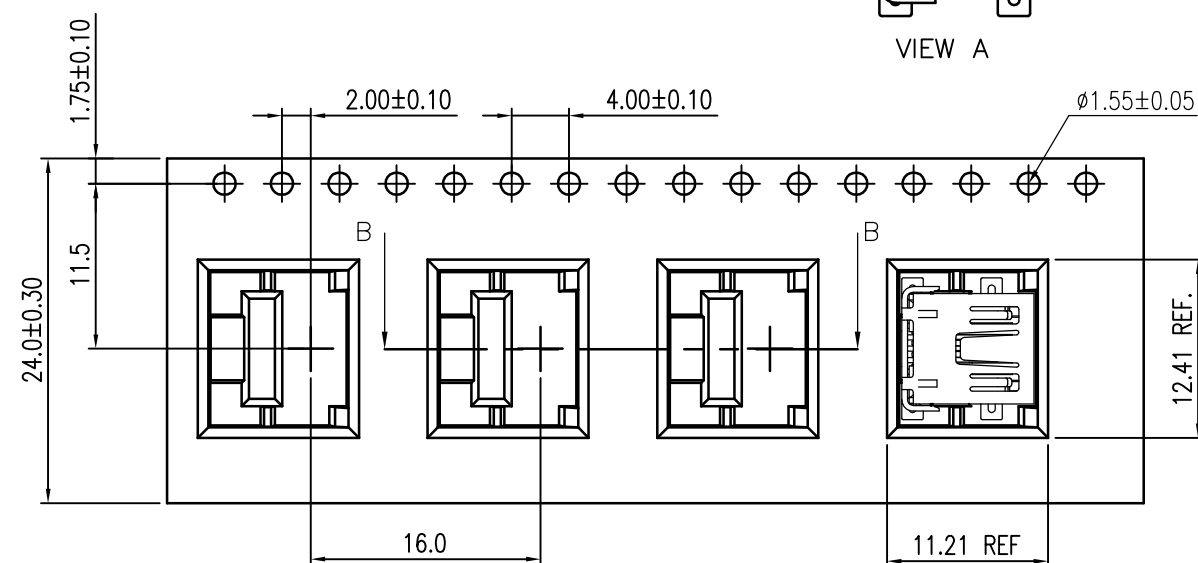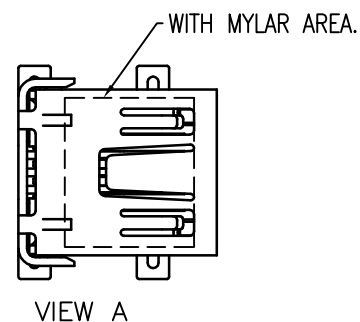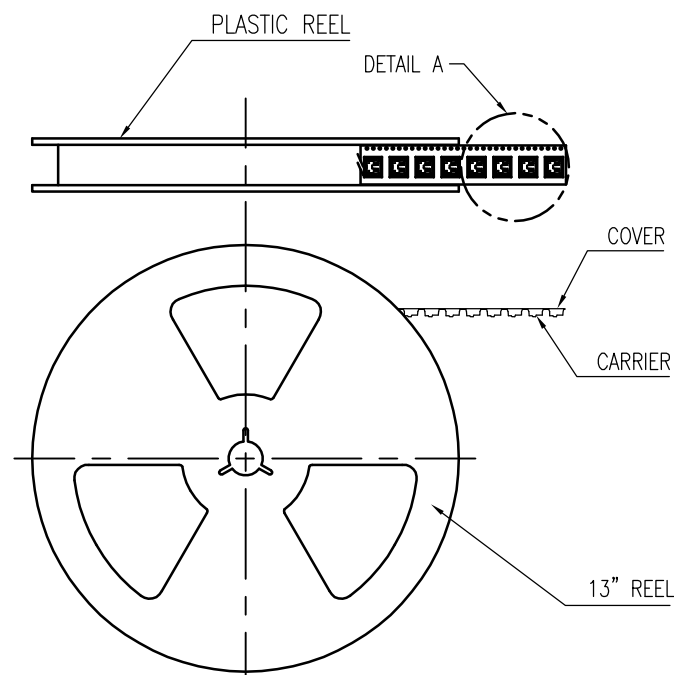


SECTION B-B

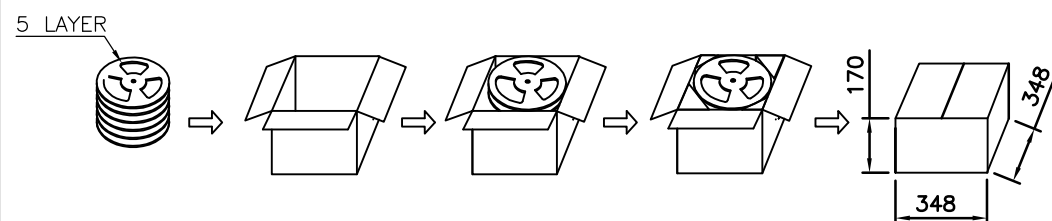

OUT BOX PACKAGE DIAGRAM DRAWING

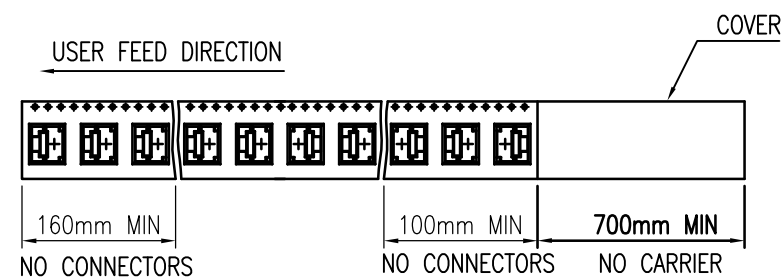


FOR 1734035-2, 1734035-4, 1734035-5, 1-1734035-2,
3-1734035-2, 2-1734035-2, 2-1734035-4, 4-1734035-2

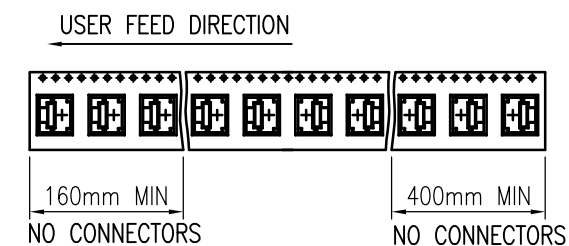

4.95 Kg	2.31 Kg	700	5	3500	W/	W/O	4-1734035-2
					W/O	W/O	3-1734035-2
					W/	W/O	2-1734035-4
					W/O	W/	2-1734035-3
					W/O	W/O	2-1734035-2
					W/O	W/	1-1734035-3
					W/O	W/O	1-1734035-2
					W/	W/O	1734035-5
					W/	W/O	1734035-4
					W/O	W/	1734035-3
					W/O	W/O	1734035-2
GROSS WEIGHT	NET WEIGHT	PCS/REER	REERS /CARTON	QUANTITY	MYLAR	LONG CARRIER & COVER TAPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
		CHK			
DIMENSIONS: MM		APVD		NAME	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MINI USB, R/A, SMT, B TYPE	
		0 PLC ± -			
		1 PLC ± -			
		2 PLC ± -			
3 PLC ± -		PRODUCT SPEC			
4 PLC ± -		—			
ANGLES ± -		APPLICATION SPEC			
FINISH		—			
MATERIAL		WEIGHT		RESTRICTED	
—		—		—	
CUSTOMER DRAWING				SIZE	RESTRICTED
				A3	
				00779	
				C=1734035	
				SCALE	
				—	
				SHEET	
				4	
				OF 4	
				REV	
				F	