

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	24APR2015	DL	CW

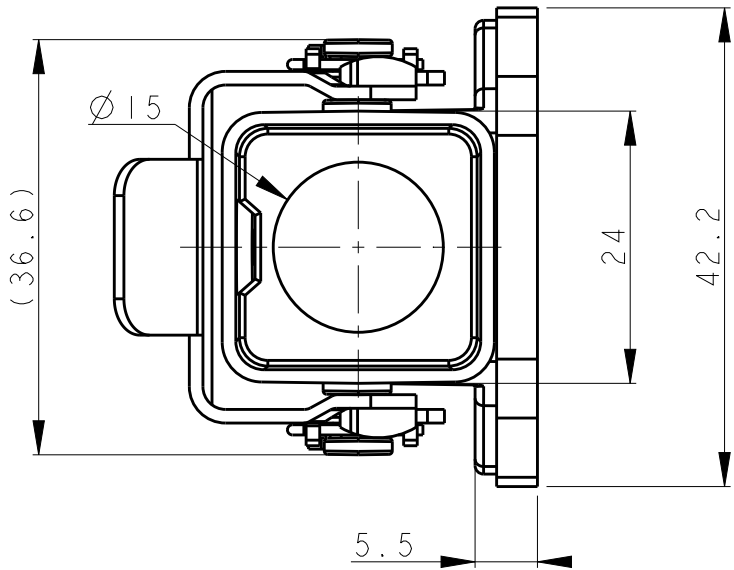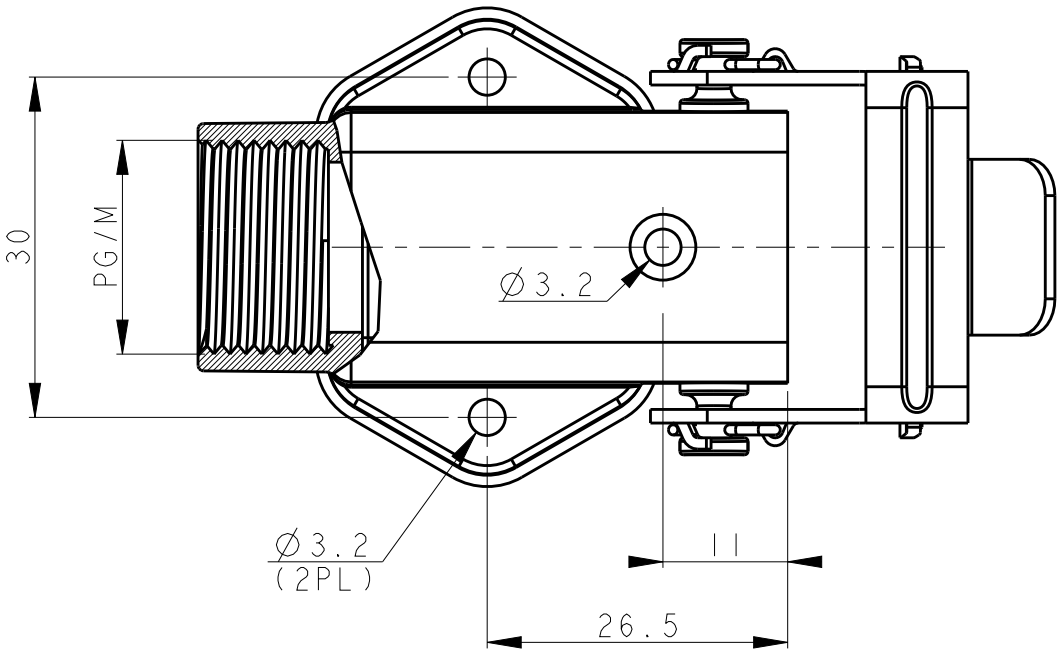

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ZINC ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 锌合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

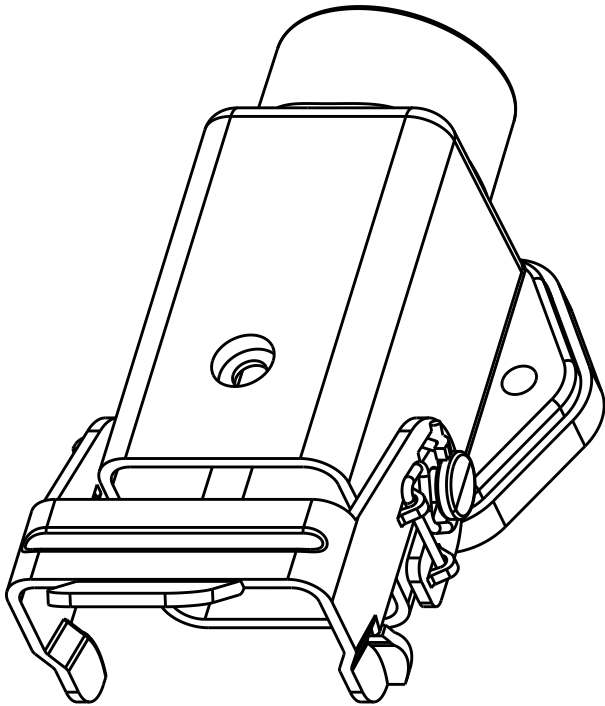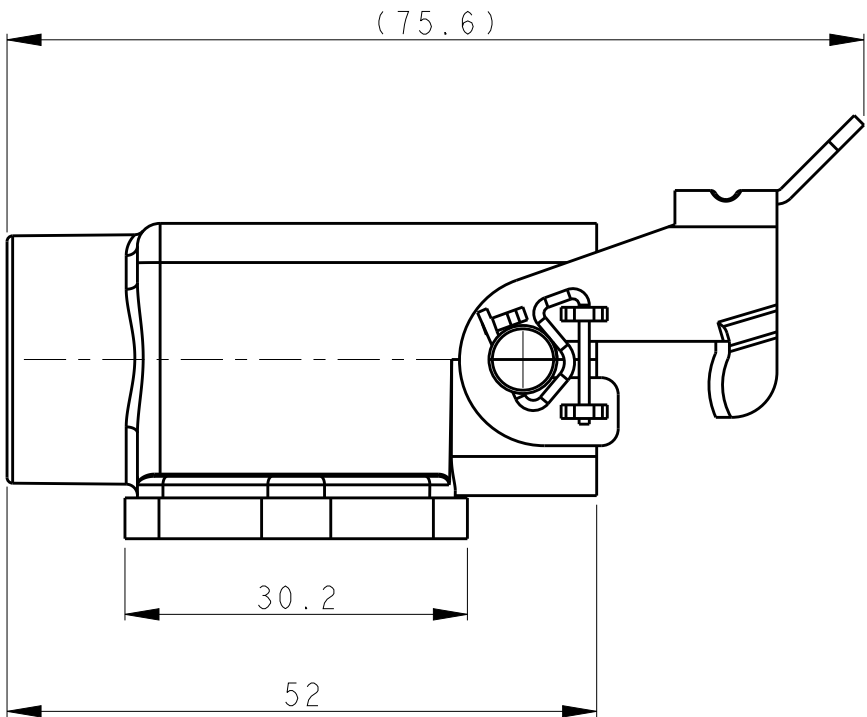

TI6I9030111-000	H3A-MAGSV-PG11	PG11
TI6I9030116-000	H3A-MAGSV-M16	M16
TI6I9030120-000	H3A-MAGSV-M20	M20
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 24APR2015	TE Connectivity H3A-MAGSV-PG/M		
DIMENSIONS: mm		CHK CHRIS WANG 24APR2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 24APR2015			
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC 108-137012 APPLICATION SPEC 114-137012			
MATERIAL	FINISH	WEIGHT	SIZE A3	CAGE CODE -	DRAWING NO C-TI6I90301XX000
-	-	-	RESTRICTED TO -		
-	-	CUSTOMER DRAWING	SCALE 3:2	SHEET 1 OF 1	REV A