
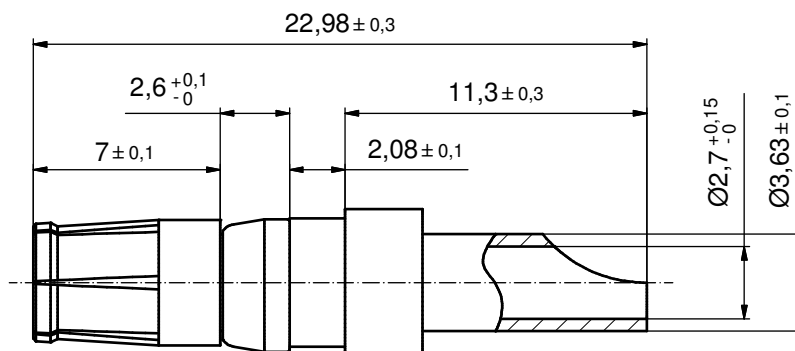


STRIPPING DIMENSION

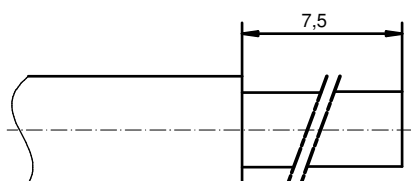

Directive 2002/95/EC RoHS compliant

plating	part no.
GOLD FLASH over NICKEL	132A10029X
30µin HARD GOLD over min. 50µin NICKEL	132C10029X
50µin HARD GOLD over min. 50µin NICKEL	132J10029X

3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED				
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL				
1	1	FRONT SIDE	COPPER ALLOY	SEE TABLE				
pos	qty	description	material	plating				
partlist								
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND			tolerance	scale: 5:1				
			ISO 2768-m	material: see partlist				
				dim. in mm	title: HIGH POWER CONTACT FEMALE SOLDER CUP 20A D-SUB COMBINATION			
						date	name	
			drawn	23.03.98		Barcinski		
			appd.	23.03.98		Mickenbecker		
			norm					
			d-old					
			1 x b	Ä4820	02.07.2013	K.H.	dwg no: 13K11E4A	DIN-A3 sh: 1
			a	Original				
rev.	description	date	name	part no: see table				
								