


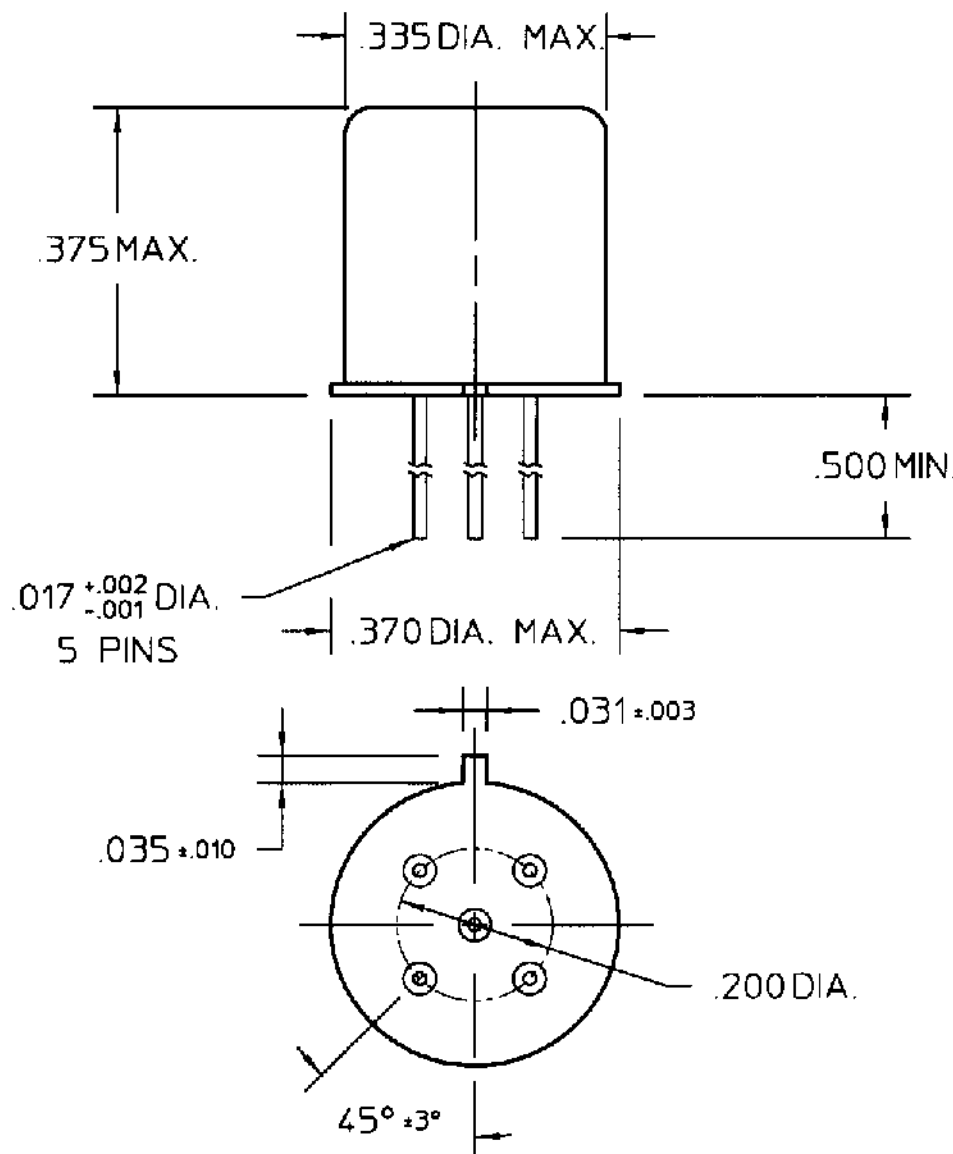

COIL: @ 25°C

RESISTANCE 1025 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 8.0 VDC

MUST RELEASE 4.0 VDC MAX, 0.63 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.

RELEASE TIME 7.5 MS MAX.

CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/29/97 CK. JEP 10/29/97

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. QPL
CUST. NO. M39016/26-035P

TYPE J1MSDD RELAY

J1MSCDD-12XP