


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		G	REVISED PER ECO-14-011808	09AUG2014	AP	SB

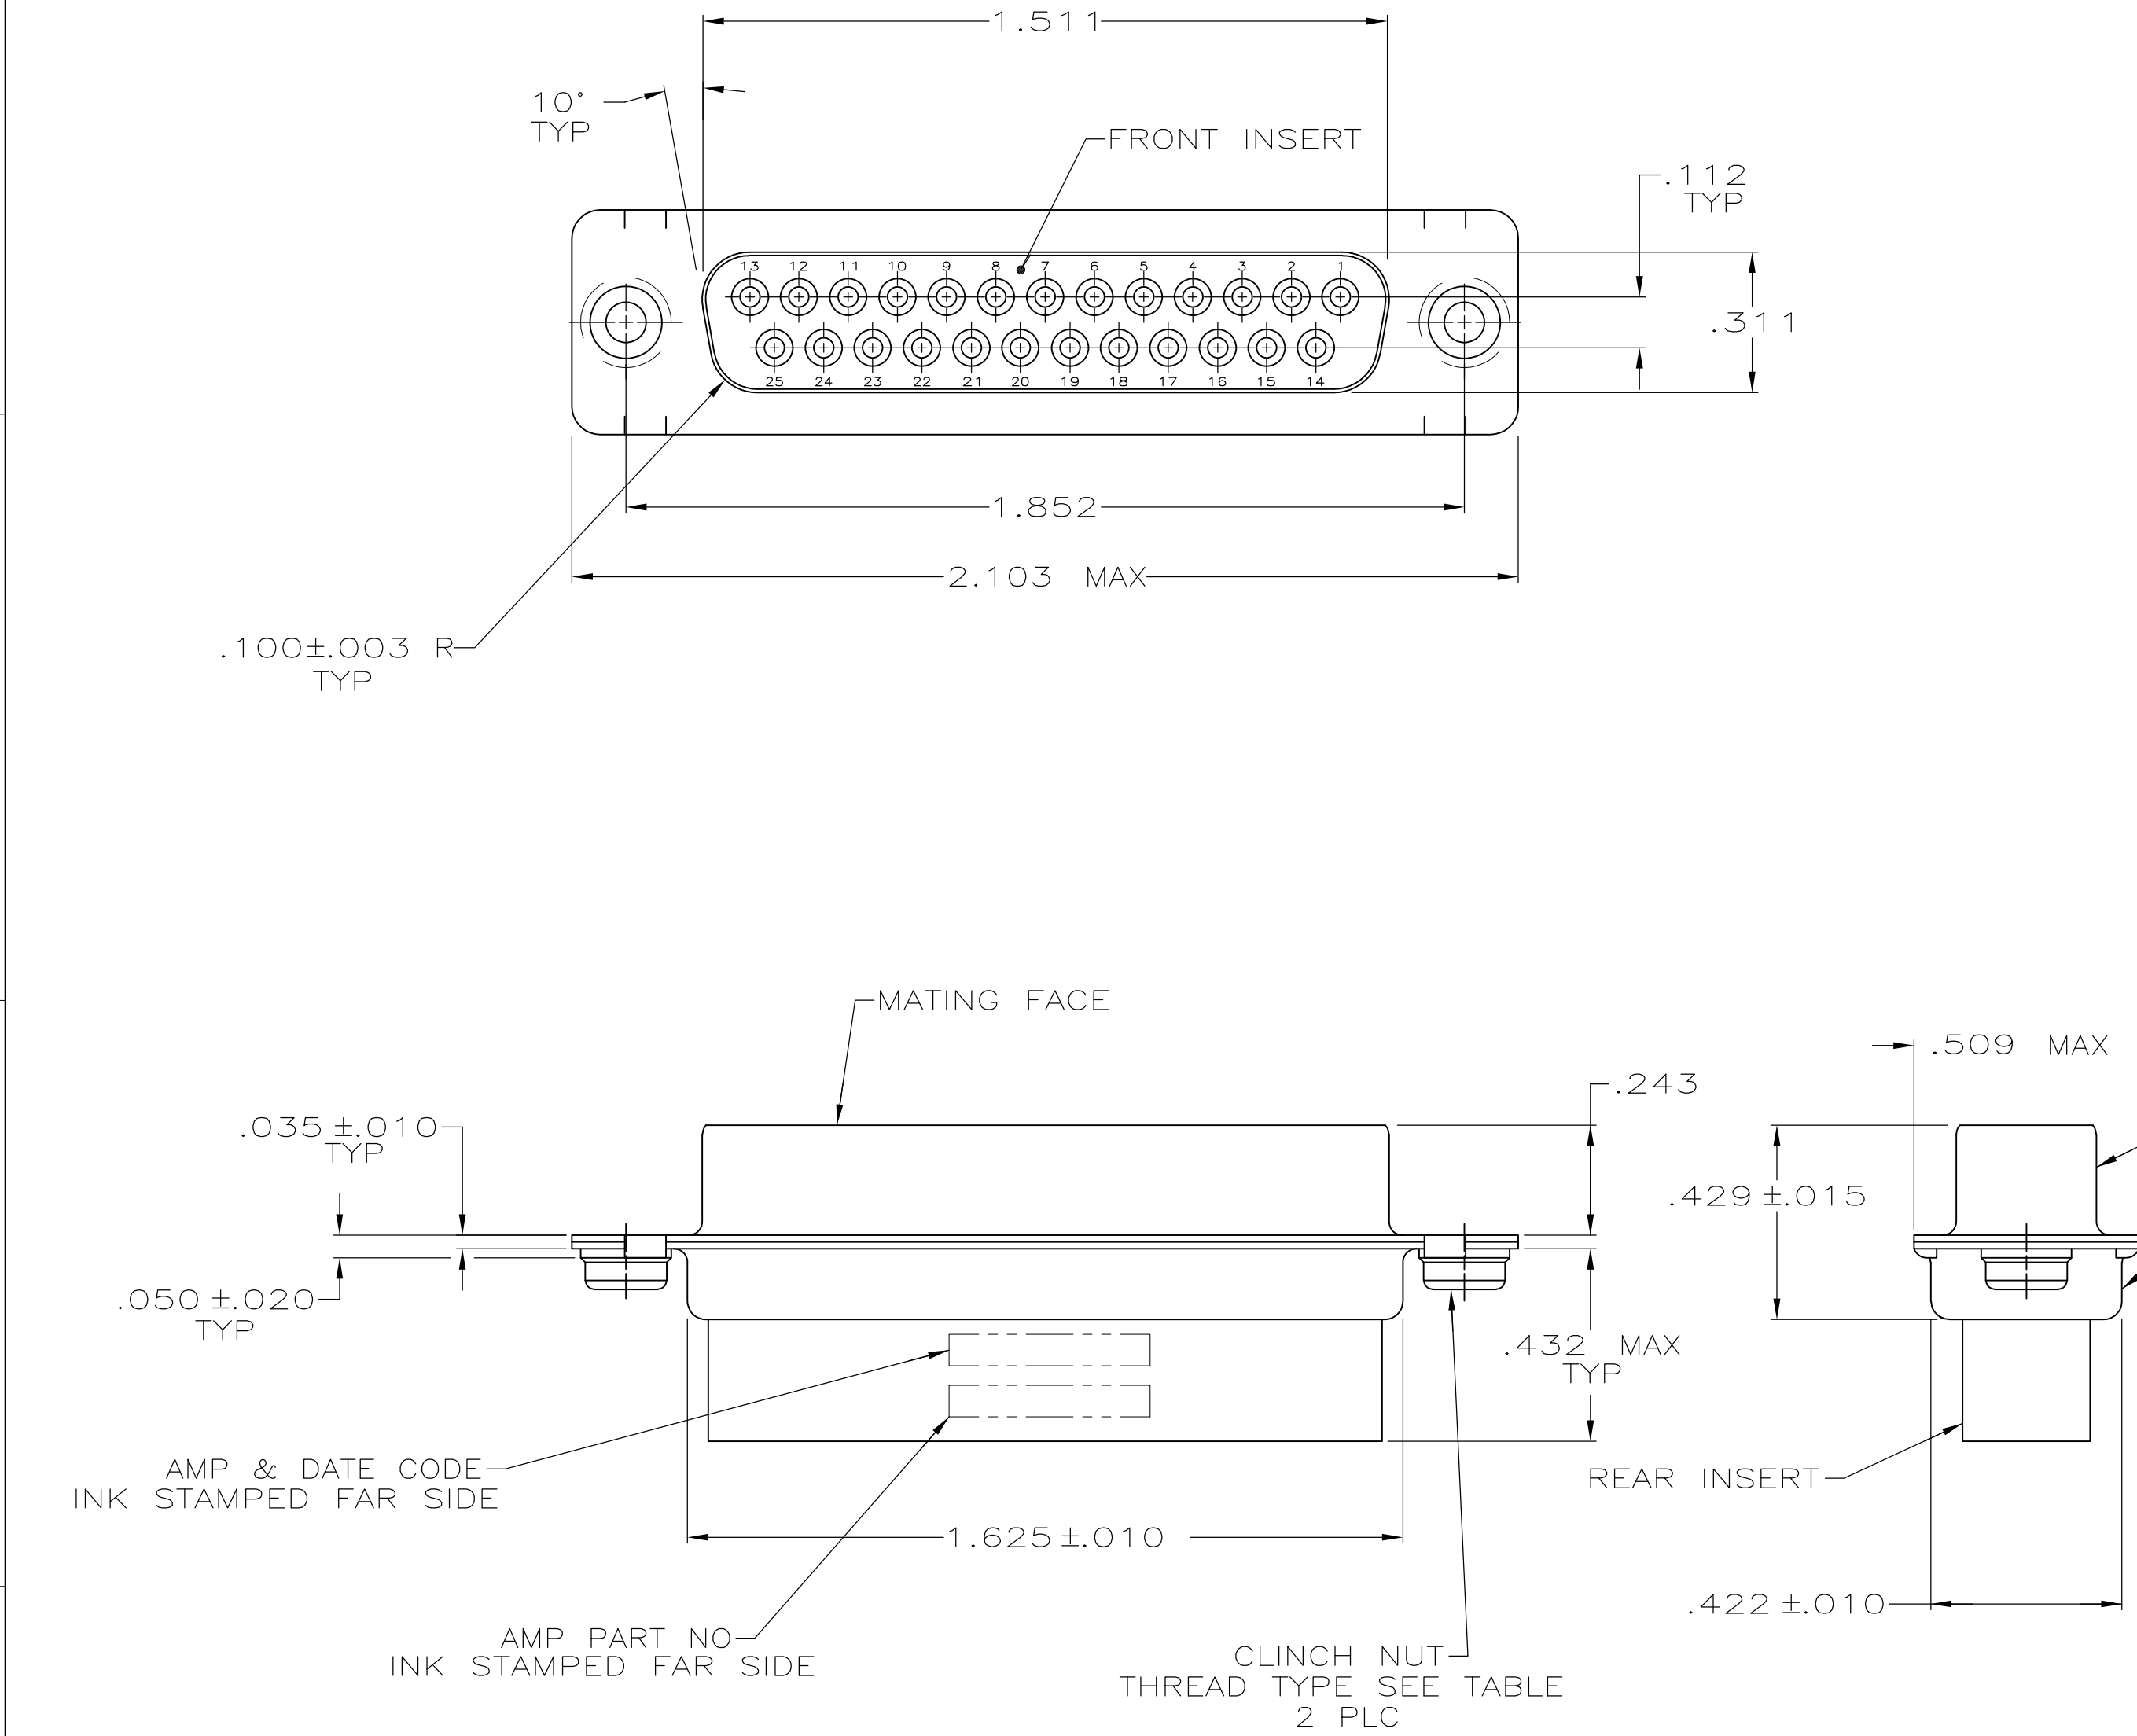

1. WIRE INSULATION SIZE RECOMMENDED FOR USE WITH THIS RECEPTACLE IS .068 DIA MAX.
 2. TO INSERT AND REMOVE CONTACTS USE TOOL 91067-2.
 3. CONTACT RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 4 CARBON STEEL.
 - 5 ZINC PLATED YELLOW CHROMATE.
 - 6 .000200 MIN TIN OR TIN-LEAD PLATE OVER .000100 COPPER UNDERPLATE.
 - 7 GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
 - 8 ZINC PLATED CLEAR CHROMATE.
 - 9 .000200 MIN TIN PLATE OVER .000100 MIN COPPER UNDERPLATE.
 - 10 ZINC PLATED .000200-.000400 THICK, YELLOW TRIVALENT CHROMIUM CHROMATE COATING.

	10	8	4-40	207516-6
	9	8	4-40	207516-5
OBSOLETE	6	5	M-3	207516-4
OBSOLETE	6	8	4-40	207516-3
OBSOLETE	-	-	-	207516-2
OBSOLETE	5	8	4-40	207516-1
	SHELL FINISH	CLINCH NUT FINISH	THREAD	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-

MATERIAL

FINISH

CLINCH NUTS & SHELLS:

INSERTS: 7

DWN H MOLL 11 APR 91

CHK R.STONE 17 APR 91

APVD -

PRODUCT SPEC 108-10020

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

RECEPTACLE CONNECTOR, SIZE 3, 25 POSN, WITH CLINCH NUTS,

SIZE A2 CAGE CODE 00779 DRAWING NO C-207516 RESTRICTED TO -

SCALE 3:1 SHEET 1 of 1 REV G