

**FEATURES**

- \* 0.8-INCH (20.32-mm) DIGIT HEIGHT.
- \* CONTINUOUS UNIFORM SEGMENTS
- \* LOW POWER CONSUMPTION.
- \* LOW POWER REQUIREMENT.
- \* EXCELLENT CHARACTERS APPEARANCE.
- \* WIDE VIEWING ANGLE.
- \* SOLID STATE RELIABILITY.
- \* CATEGORIZED FOR LUMINOUS INTENSITY.
- \* I.C. COMPATIABLE.
- \* EASY MOUNTING ON P.C. BOARD OR SOCKET.


**DESCRIPTION**

The LTS-3401LJD is a 0.8-inch (20.32-mm) digit height single digit low current seven-segment display. This device utilizes AlInGaP hi-eff. red LED chips, which are made from AlInGaP on a non-transparent GaAs substrate, and has a gray face and white segments.

**DEVICE**


PART NO.	DESCRIPTION
AlInGaP Hi-Eff. RED	Common Anode
LTS-3401LJD	Rt. & Lt. Hand Decimal

## PACKAGE DIMENSIONS

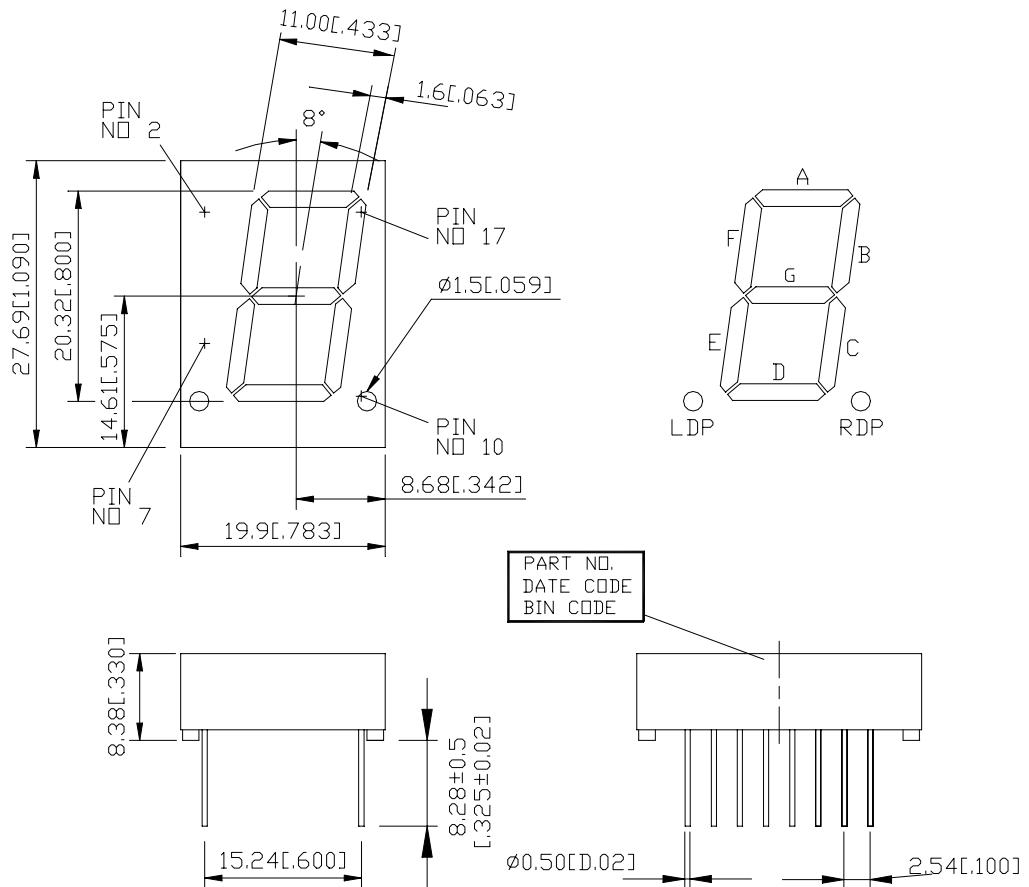

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$ -mm (0.01") unless otherwise noted.

## INTERNAL CIRCUIT DIAGRAM

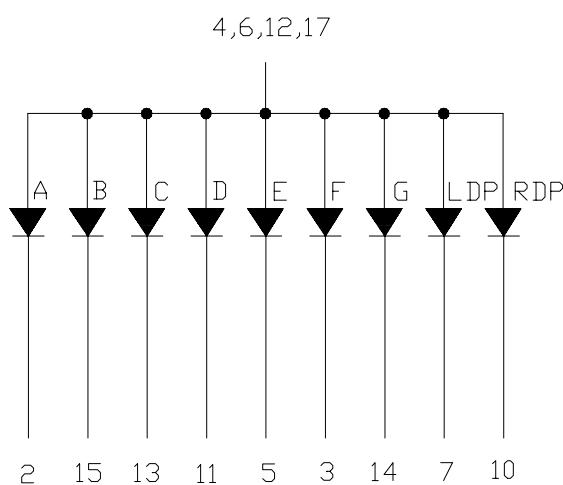

**PIN CONNECTION**

No.	CONNECTION
1	NO PIN
2	CATHODE A
3	CATHODE F
4	COMMON ANODE
5	CATHODE E
6	COMMON ANODE
7	CATHODE L.D.P
8	NO PIN
9	NO PIN
10	CATHODE R.D.P
11	CATHODE D
12	COMMON ANODE
13	CATHODE C
14	CATHODE G
15	CATHODE B
16	NO PIN
17	COMMON ANODE
18	NO PIN

**ABSOLUTE MAXIMUM RATING AT  $T_A=25^\circ\text{C}$** 

PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation Per Segment	70	mW
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	90	mA
Continuous Forward Current Per Segment	25	mA
Derating Linear From $25^\circ\text{C}$ Per Segment	0.33	mA/ $^\circ\text{C}$
Reverse Voltage Per Segment	5	V
Operating Temperature Range	$-35^\circ\text{C}$ to $+85^\circ\text{C}$	
Storage Temperature Range	$-35^\circ\text{C}$ to $+85^\circ\text{C}$	
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds	$260^\circ\text{C}$	

**ELECTRICAL / OPTICAL CHARACTERISTICS AT  $T_A=25^\circ\text{C}$** 

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	$I_v$	320	700		$\mu\text{cd}$	$I_F=1\text{mA}$
Peak Emission Wavelength	$\lambda_p$		650		nm	$I_F=20\text{mA}$
Spectral Line Half-Width	$\Delta\lambda$		20		nm	$I_F=20\text{mA}$
Dominant Wavelength	$\lambda_d$		639		nm	$I_F=20\text{mA}$
Forward Voltage Per Segment	$V_F$		2.1	2.6	V	$I_F=20\text{mA}$
Reverse Current Per Segment	$I_R$			100	$\mu\text{A}$	$V_R=5\text{V}$
Luminous Intensity Matching Ratio	$I_v\text{-m}$			2:1		$I_F=10\text{mA}$

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

## TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

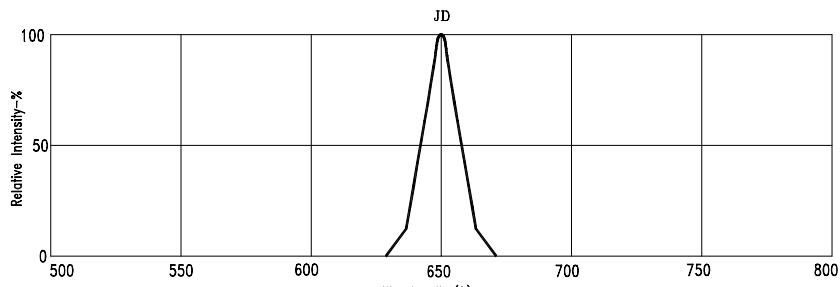


Fig.1. RELATIVE INTENSITY VS. WAVELENGTH




Fig.2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT




Fig.3. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig.4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig.5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE




Fig.6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE : JD=AlInGaP HYPER RED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lite-On:](#)

[LTS-3401LJD](#)