

## CES-LRG-BK-24

Order No.: 0801639



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=0801639>

Large, slotted cable sleeves suitable for cables with a diameter of 23 ... 24 mm, material: NBR

### Commercial data

|                        |   |
|------------------------|---|
| EAN                    | <br>4 046356 674348 |
| sales group            | B241  |
| Pack                   | 10 Pcs.   |
| Customs tariff         | 40169300  |
| Gross weight in pieces | 0.02869 KG  |
| Net weight per piece   | 0.02222 KG  |

### Product notes

WEEE/RoHS-compliant since:  
06/27/2011



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

Slotted sleeves for accommodating pre-assembled cables and lines with a diameter of 23 ... 24 mm, can be used in CES sealing frames. When fitted, the sleeves also ensure strain relief according to DIN EN 50262.

## Technical data

### General data

|                                 |  |
|---------------------------------|--|
| Product description             | Slotted sleeves for accommodating pre-assembled cables and lines with a diameter of 23 ... 24 mm, can be used in CES sealing frames. When fitted, the sleeves also ensure strain relief according to DIN EN 50262. |
| External cable diameter         | 23 mm ... 24 mm  |
| Material                        | NBR  |
| Color                           | black  |
| Degree of protection            | IP54   |
| Ambient temperature (operation) | -40 °C ... 80 °C (static)  |

## Certificates / Approvals


Certification

Certifications applied for:

Certification Ex:

## Drawings

Dimensioned drawing

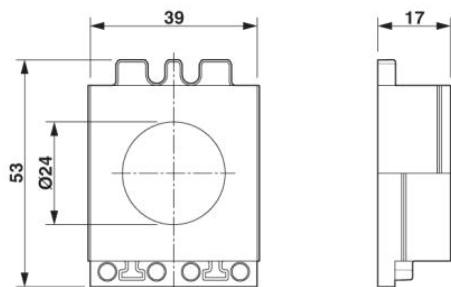

Dimensional drawing

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2012 Phoenix Contact  
Technical modifications reserved;