


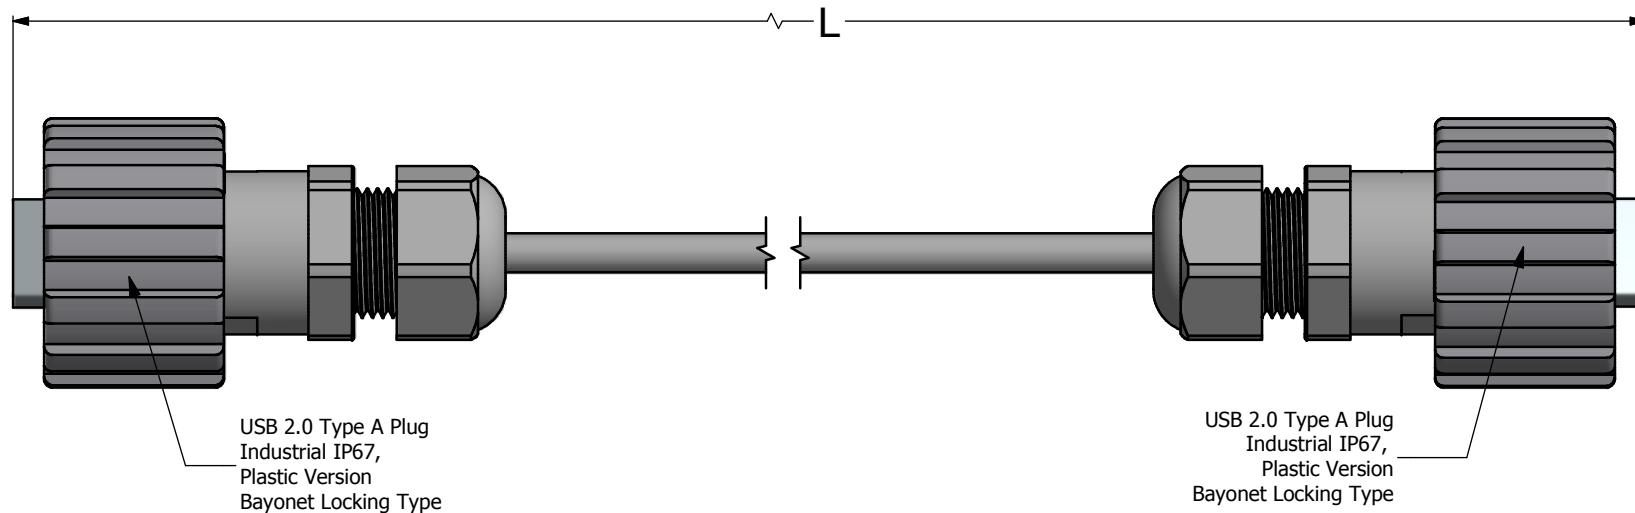

NOTES:

1. Electrical Specifications:

- Meets USB 2.0 specifications
- Low level Contact Resistance: 30 mOhm max.
- Insulation Resistance 1000 MOhm min.
- Current Rating: 1.5 A max. @ 25°C
- DWV: 500 VAC/60s at sea level
- Operating Temperature: -40°C to +80°C

2. Material and Finish:

- Coupling Ring: Polyester (Black); UL94 V-0
- Plug Housing: Polyester (Black); UL94 V-0
- Interfacial Seal: Silicone, Color: White
- Cable Gland: PA (Black); UL94 V-0
- Cable Gland Seal: NBR, Color: Black
- USB Insulator: PBT, UL 94V-0, Color: White
- USB Metal Shell: SPCC. Nickel plated
- USB Contact: Copper Alloy, 30 u" min. Au over 40 u" min. Nickel Plated

3. Shielded USB Cable Configuration

AWM 2725 AWG28/1p + AWG24/2c, OD: 4.5 mm Color: black

Directive 2002/95/EC RoHS Compliant

② ③ ④	Cable Length L	Part Number
	0.46 m +/- 0.01m	17-230361
	1 m +/- 0.03m	17-200271
	2 m +/- 0.05m	17-200281
	3 m +/- 0.05m	17-200291
	4 m +/-0.08m	17-200301
	4.5 m +/-0.08m	17-200311

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	Customer:			Tolerance Unless otherwise specified 0 P L C ±0.30 1 P L C ±0.20 2 P L C ±0.10 3 P L C ±0.05 ANGLES ±1°				Scale: 1.7:1		Dim. in		
	Name		Title	Approval Date			Autodesk Inventor		Material: See Notes			
					2008	Date	Name	Title: USB Patch Cord USB 2.0 Type A Plug (Industrial) to USB 2.0 Type A Plug (Industrial)				
					Draw.	Sept. 23	Vincent Ke					
					Appd.	Sept. 23	J. chaudry					
	d	1 x d	Feb/26/2014	Vincent Ke	Norm							
	c	1 x c	May/08/2013	Vincent Ke	D-old							
	b	1 x b	Jan/19/2009	Vincent ke				Drawing No.: 17K1A107		DIN A3		
	a	original										
	Rev.	Changes	Date	Name	Part No.: SEE P/N ABOVE							Sheet 1/1

CONEC