

Inline terminal - IB IL PD 24V-PAC - 2862987

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline terminal for power distribution (24 V), complete with accessories, (connector and labeling field) 24 V supply voltage is fed out from the segment circuit (US)

Product Description

The terminal is designed for use within an Inline station. The IB IL PD 24V (-PAC) allows the 24 V supply voltage to be fed out of the segment circuit (US). It thus makes it possible to supply 24 V from US for sensors that are connected with 1-wire technology to the IB IL 24 DI 32/HD terminal block.

Product Features

- Supply of the 24 V segment voltage US



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	74.7 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Interfaces

Connection method	Inline data jumper
Interface	Inline local bus

Power supply

Inline terminal - IB IL PD 24V-PAC - 2862987

Technical data

Power supply

I/O voltage	24 V DC
I/O voltage range	19.2 V DC ... 30 V DC
Max. current consumption	8 A

General

Weight	44 g
--------	------

Inline potentials

Segment circuit supply U_s	24 V DC
Current consumption from U_s	8 A (maximum)

Standards and Regulations

Test section	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min.
--------------	---

Classifications

eCl@ss

eCl@ss 4.0	27250302
eCl@ss 4.1	27250281
eCl@ss 5.0	27250304
eCl@ss 5.1	27242610
eCl@ss 6.0	27242610
eCl@ss 7.0	27242610
eCl@ss 8.0	27242610

ETIM

ETIM 2.0	EC000313
ETIM 3.0	EC001600
ETIM 4.0	EC001600
ETIM 5.0	EC001600

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Inline terminal - IB IL PD 24V-PAC - 2862987

Approvals

Approvals

Approvals

LR / BV / ABS / EAC

Ex Approvals

Approvals submitted

Approval details

LR


BV

ABS

EAC

Drawings

Connection diagram

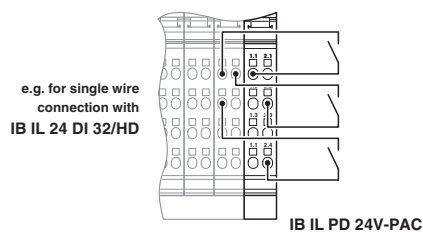

Dimensional drawing

