

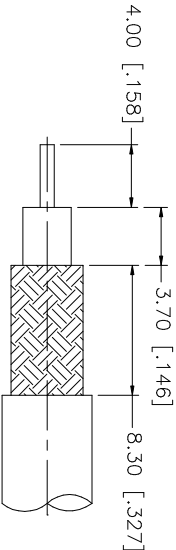



DESCRIPTION		
REV.	DATE	
A	07/21/99	REFORMAT DRAWING
B	11/12/99	MODIFY BARREL AND FERRULE DIMENSIONS
C	12/09/03	UPDATE DRAWING FORMAT

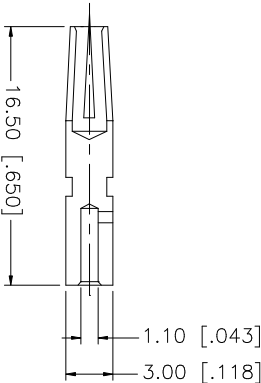

RECOMMENDED
CABLE STRIPPING DIM'S

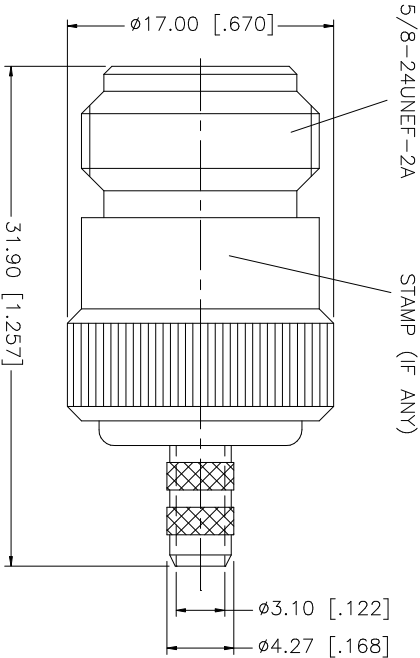

NOTES:

1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .100"

			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.			APPROVALS			Amphenol Connex PART DESCRIPTION N CRIMP JACK- CAPTIVE CONTACT (RG 55/U, 142/U, 223/U, 400/U CABLE - 50ohms)		
8			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.			DRAWN	G.R.S.	12/09/03			
7			UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:			CHECKED					
6			0.5 - 8mm ± 0.20mm			ISSUED					
5			8 - 30mm ± 0.40mm			SHEET	1 OF 1				
4	FERRULE	COPPER	NEXCOTE	1		PART NO.			172147		
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		DWG. NO.			172147.DWG		
2	INSULATOR	TEFLON	NATURAL	1		REV.			NC		
1	BODY	BRASS	NEXCOTE	1		SIZE			A		
DESCRIPTION			MATERIAL			FINISH			SCALE		
						QTY			NA		
						DO NOT SCALE DRAWING					