

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	FIRST RELEASED	15AUG2017	WH	DZ

D

C

B


A

D

C

B

A

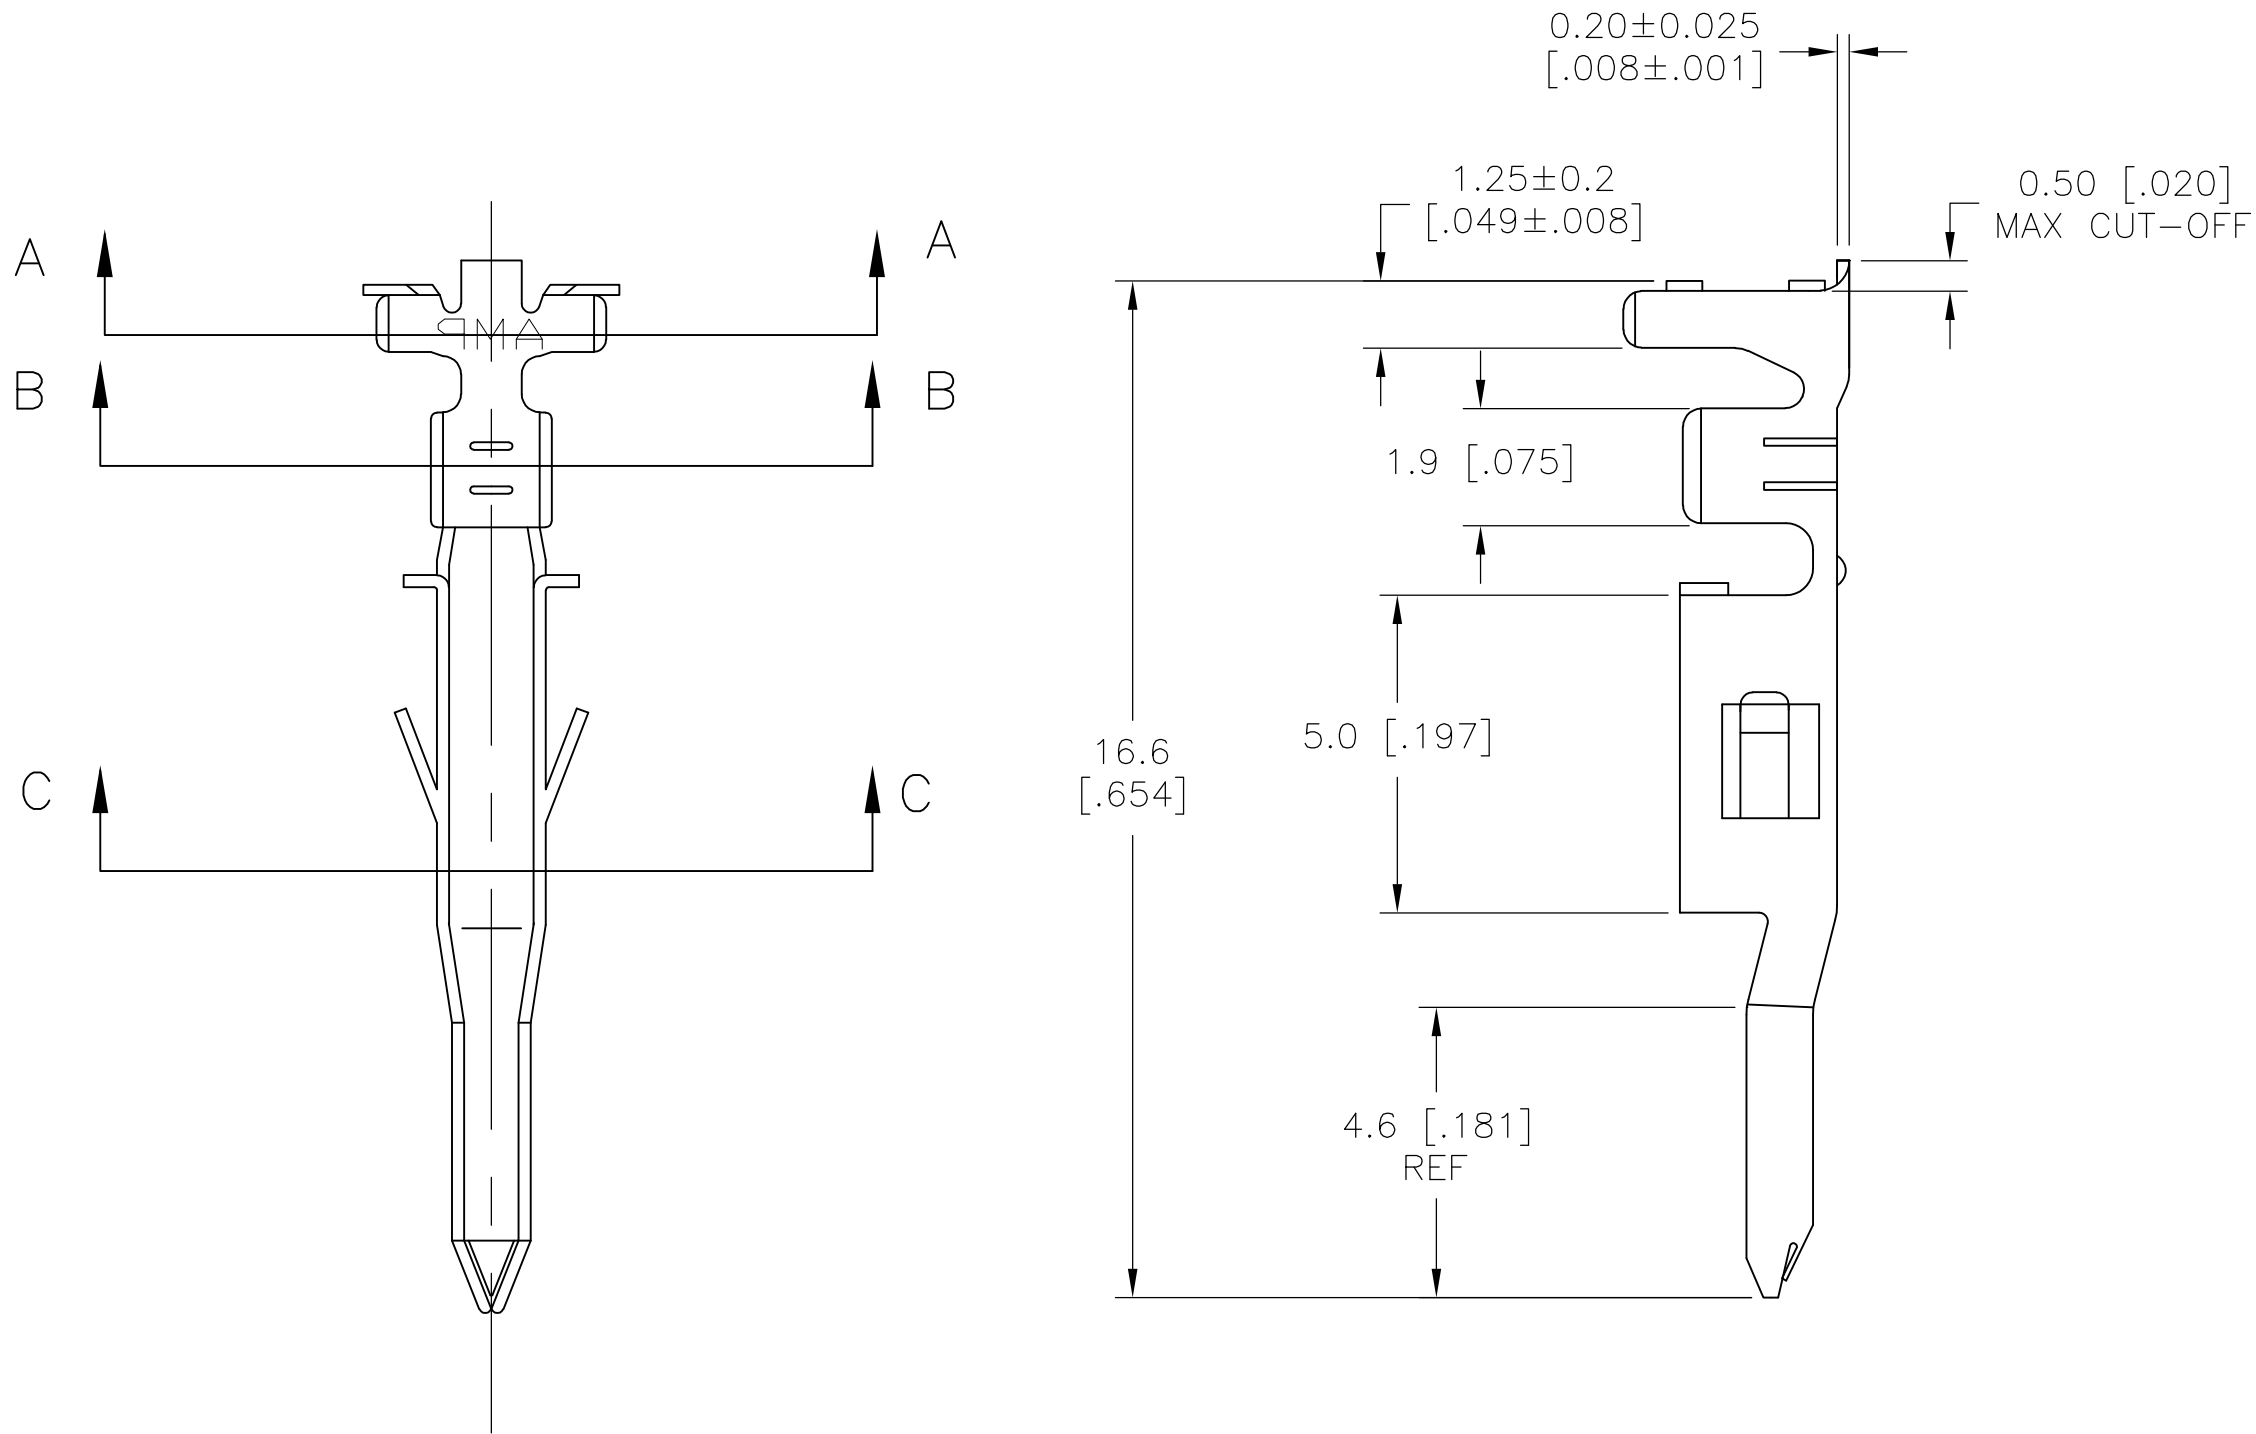

- 1 WIRE RANGE $0.3-0.82 \text{ mm}^2$ [22-18 AWG]
- 2 INSULATION RANGE: DIA $1.50-3.10 \text{ mm}$ [.060-.122 in]
- △3 FINISH: $2.54 \mu\text{m}$ [.0001 in] MINIMUM PRE-TIN ALL OVER.
- 4 MATING PART: 2825211-1 (STRIP TYPE) OR 2825213-1 (LOOSE TYPE)

SECTION A-A

SECTION B-B

SECTION C-C

PRE-TIN △3	HIGH PERFORMANCE COPPER ALLOY	2825212-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN WARREN HUO 15AUG2017	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK DANIEL ZHANG 15AUG2017			
		APVD DANIEL ZHANG 15AUG2017	NAME		
		PRODUCT SPEC 108-150000	PIN TERMINAL, VAL-U-LOK HCS, LOOSE PIECE		
MATERIAL SEE TABLE		APPLICATION SPEC 114-13172	SIZE A2	CAGE CODE 00779	DRAWING NO. C=2825212
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT 0	RESTRICTED TO		
FINISH SEE TABLE		CUSTOMER DRAWING	SCALE N/A	SHEET 1 OF 1	REV A