
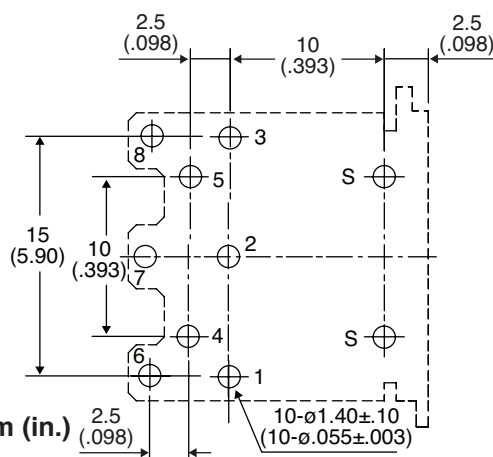
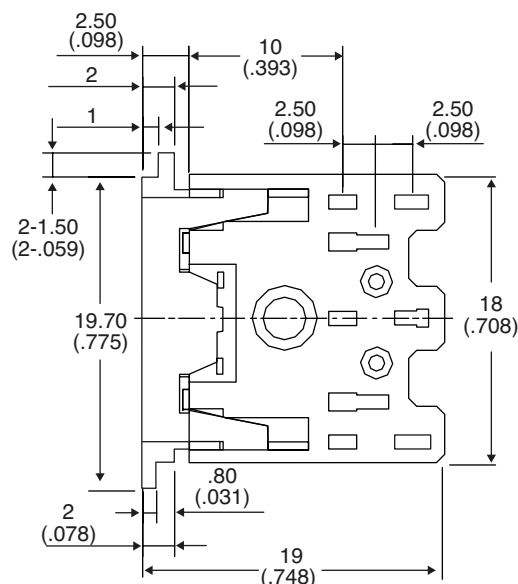


161-0508-E



PCB Layout ± 0.1 ($\pm .003$)
(Bottom View)

Type:	PCB, 8 Pin , Shielded
Insulation Resistance:	100MΩ @ 500V
Dielectric Strength:	500V AC for 1 min.
Contact resistance:	30mΩ max.
Operating Temperature:	-20°C to 60°C
Rating:	DC 24V, 1A
Life Expectancy:	5,000 cycles min.
Soldering Heat:	Solder Temp 260±5°C @ 5±1 seconds dip time

No.	Part Name	Qty.	Material	Plated	Color
1	Contact	8	Brass	Sn/Cu	-
2	Sleeve	1	P.B.S.	Sn/Cu	-
3	Housing	1	PBT-94V0	-	Black
4	Cover	1	PBT-94V0	-	Black
5	Metal Shield	1	P.B.S.	Nickel	-

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[161-0508-E](#)