


COIL: @ +25 °C
 RESISTANCE 2070 OHMS ± 10%
 NOMINAL VOLTAGE 24.0 VDC
 MUST OPERATE 17.5 VDC
 MUST RELEASE 1.4 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 500 CPS @ 10 g's
 SHOCK 30 g's 6 MS. DURATION
 TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE 6 MS MAX.
RELEASE 4 MS MAX.

CUSTOMER DATA SHEET

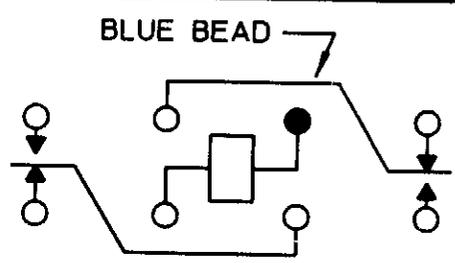

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/30/94 CK. *S/30/94*



CUST. HI-G
 CUST. NO. FS3-2A-124P

TYPE "HFW" RELAY

HFW1201P303