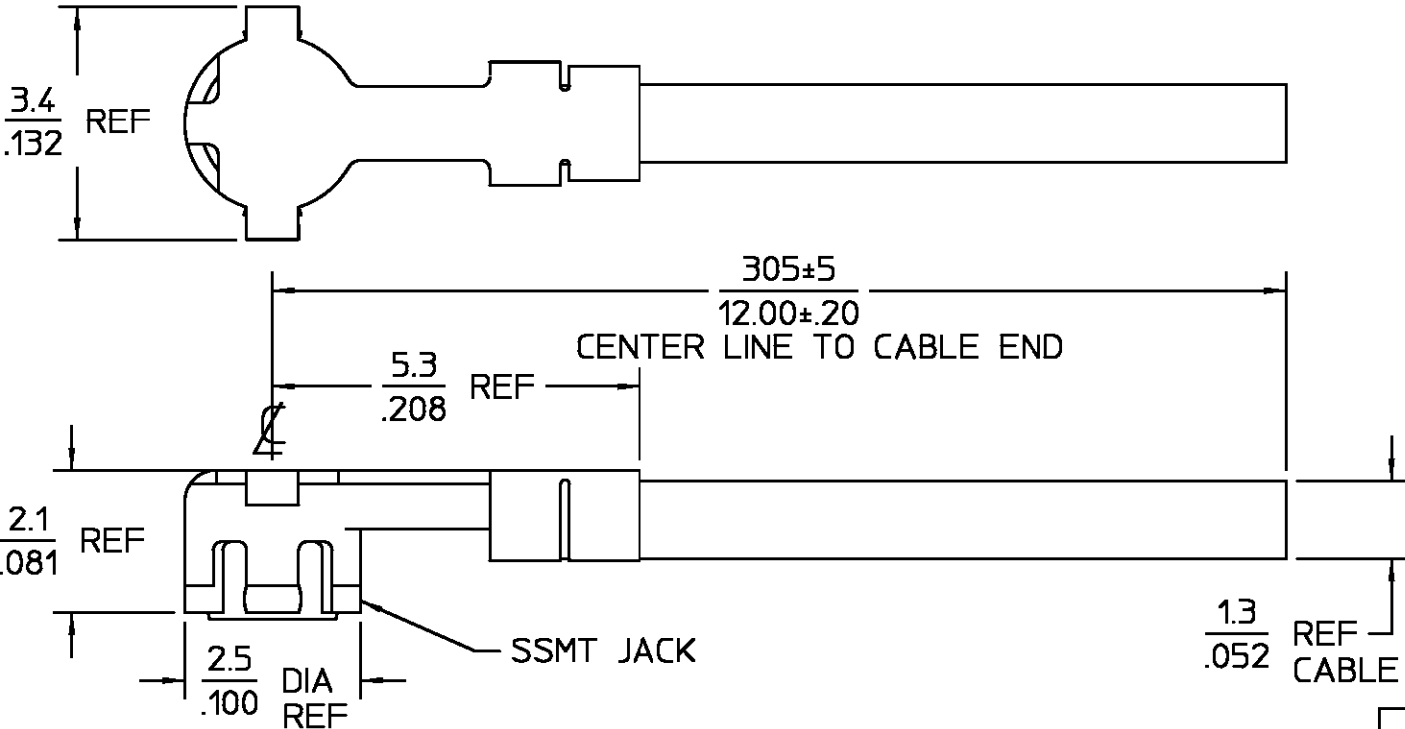


		REVISIONS			
		REV	DESCRIPTION	DATE	APPROVED
		01 0	RELEASED	7/21/95	S. Morley
		01 1	REVISED PER ECN 95-0549	12/7/95	S. Morley
		01 2	REVISED	KYLE 9-12-97	DCpm 9/15/97
		01 3	REVISED	12-2-97	KYLE LE
		01 4	REVISED PER ECN 99-0001	DM 5/20/99	S. Morley
XX.X = mm .XXX = in		CONNECTOR:			
		INNER & OUTER CONTACTS			
		DIELECTRIC			
		CABLE:			
		JACKET			
		SHIELD			
		DIELECTRIC			
		CENTER CONDUCTOR			
		COMPONENT	MATERIAL	FINISH	
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON			
		FRAC	DEC	ANGLES	
		DRAWN BY P. RESNICK DATE 3 JUNE 94			
		CHECKED BY			
		APPD BY			
		These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.			
		USE ASSY PROCEDURE			
		NO. A.P. N/A			
		TITLE SSMT RIGHT ANGLE JACK PIGTAIL CABLE ASSEMBLY			
		SIZE B	CODE IDENT NO. 26805	9960-2305-24	REV 01 4
		SCALE 10:1	CABLE TYPE SSMT-FLEX	SHEET 1 OF 1	
ELECTRICAL		Frequency DC - 6 GHz			
Nominal Impedance 50 ohms		Voltage Rating 250 Volts (VRMS Max.) @ Sea Level			
VSWR 1.20:1 Max. @ 2GHz		1.40:1 Max. @ 6GHz			
Insulation Resistance 1,000 Megohms Minimum @ 250VDC		Dielectric Withstanding Voltage 500 Volts (VRMS Minimum) @ Sea Level			
MECHANICAL		Connector Durability 100 mating cycles			
ENVIRONMENTAL		Temperature Rating -40°C (-40°F) To +125°C (257°F)			
CUSTOMER DRAWING		AMP PART # 1064540-1 SHEET 1 OF 1 REV A			
		OUTLINE, -50 AND B/M MUST CARRY THE SAME MAJOR REVISION LEVEL			