


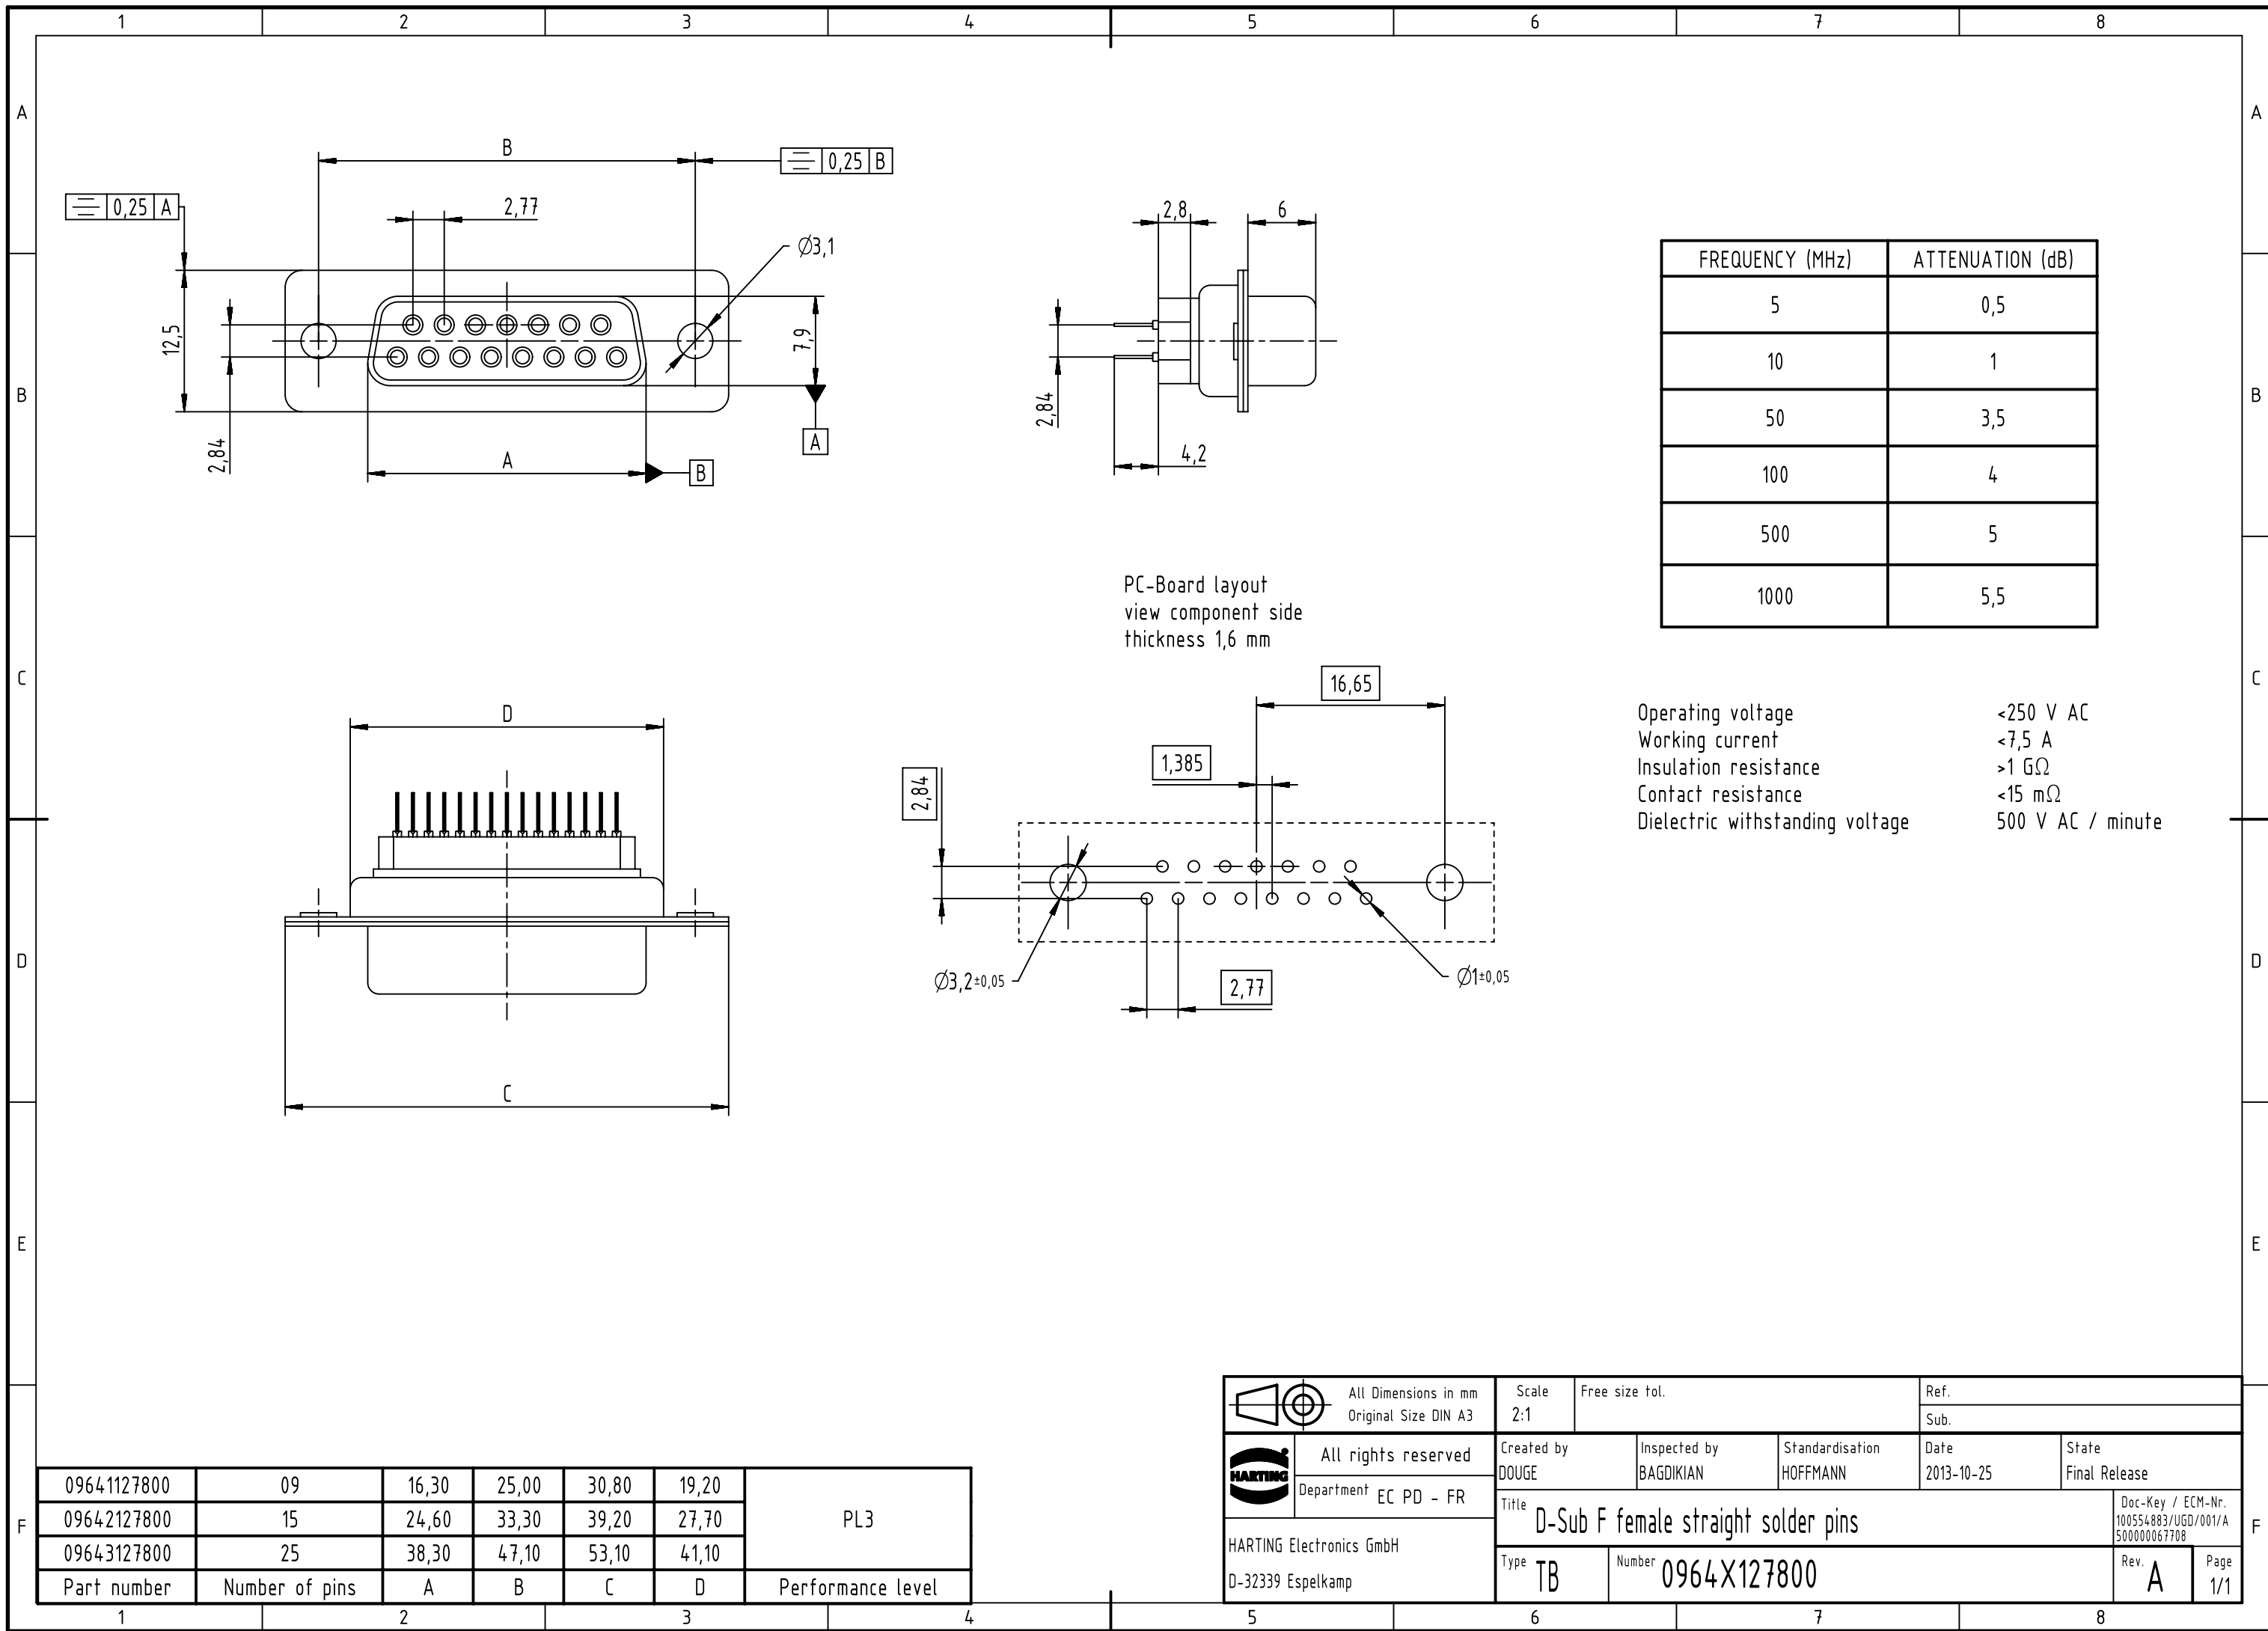

FREQUENCY (MHz)	ATTENUATION (dB)
5	0,5
10	1
50	3,5
100	4
500	5
1000	5,5

Operating voltage <250 V AC
Working current <7,5 A
Insulation resistance >1 GΩ
Contact resistance <15 mΩ
Dielectric withstanding voltage 500 V AC / minute

09641127800	09	16,30	25,00	30,80	19,20	PL3
09642127800	15	24,60	33,30	39,20	27,70	
09643127800	25	38,30	47,10	53,10	41,10	
Part number	Number of pins	A	B	C	D	Performance level

		All Dimensions in mm		Scale		Free size tol.		Ref.							
		Original Size DIN A3		2:1				Sub.							
		All rights reserved		Created by		Inspected by		Standardisation		Date		State			
		Department EC PD - FR		DOUGE		BAGDIKIAN		HOFFMANN		2013-10-25		Final Release			
HARTING Electronics GmbH		D-32339 Espelkamp		Title								Doc-Key / ECM-Nr.			
				D-Sub F female straight solder pins								100554883/UGD/001/A 500000067708			
				Type		Number						Rev.		Page	
				TB		0964X127800						A		1/1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09641127800](#) [09642127800](#) [09643127800](#)