

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	20
COPYRIGHT 20		BY -	ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECO-11-005027	12MAR2011	RK	HMR

1 MATERIAL:
CONTACT: BRASS
LATCH HOUSING, INSERT, COLLET, COLLET NUT:
UL 94V-0 RATED THERMOPLASTIC
COLOR:
COLLET AND INSERT: GRAY
LATCH HOUSING AND NUT: SEE TABLE


2 FINISH:
CONTACT, 0.75µm MIN. GOLD OVER NICKEL

3 SOLDER TERMINATION CONTACT, 28 AWG WIRE MAX.


4. PRODUCT IS SUPPLIED UNASSEMBLED.

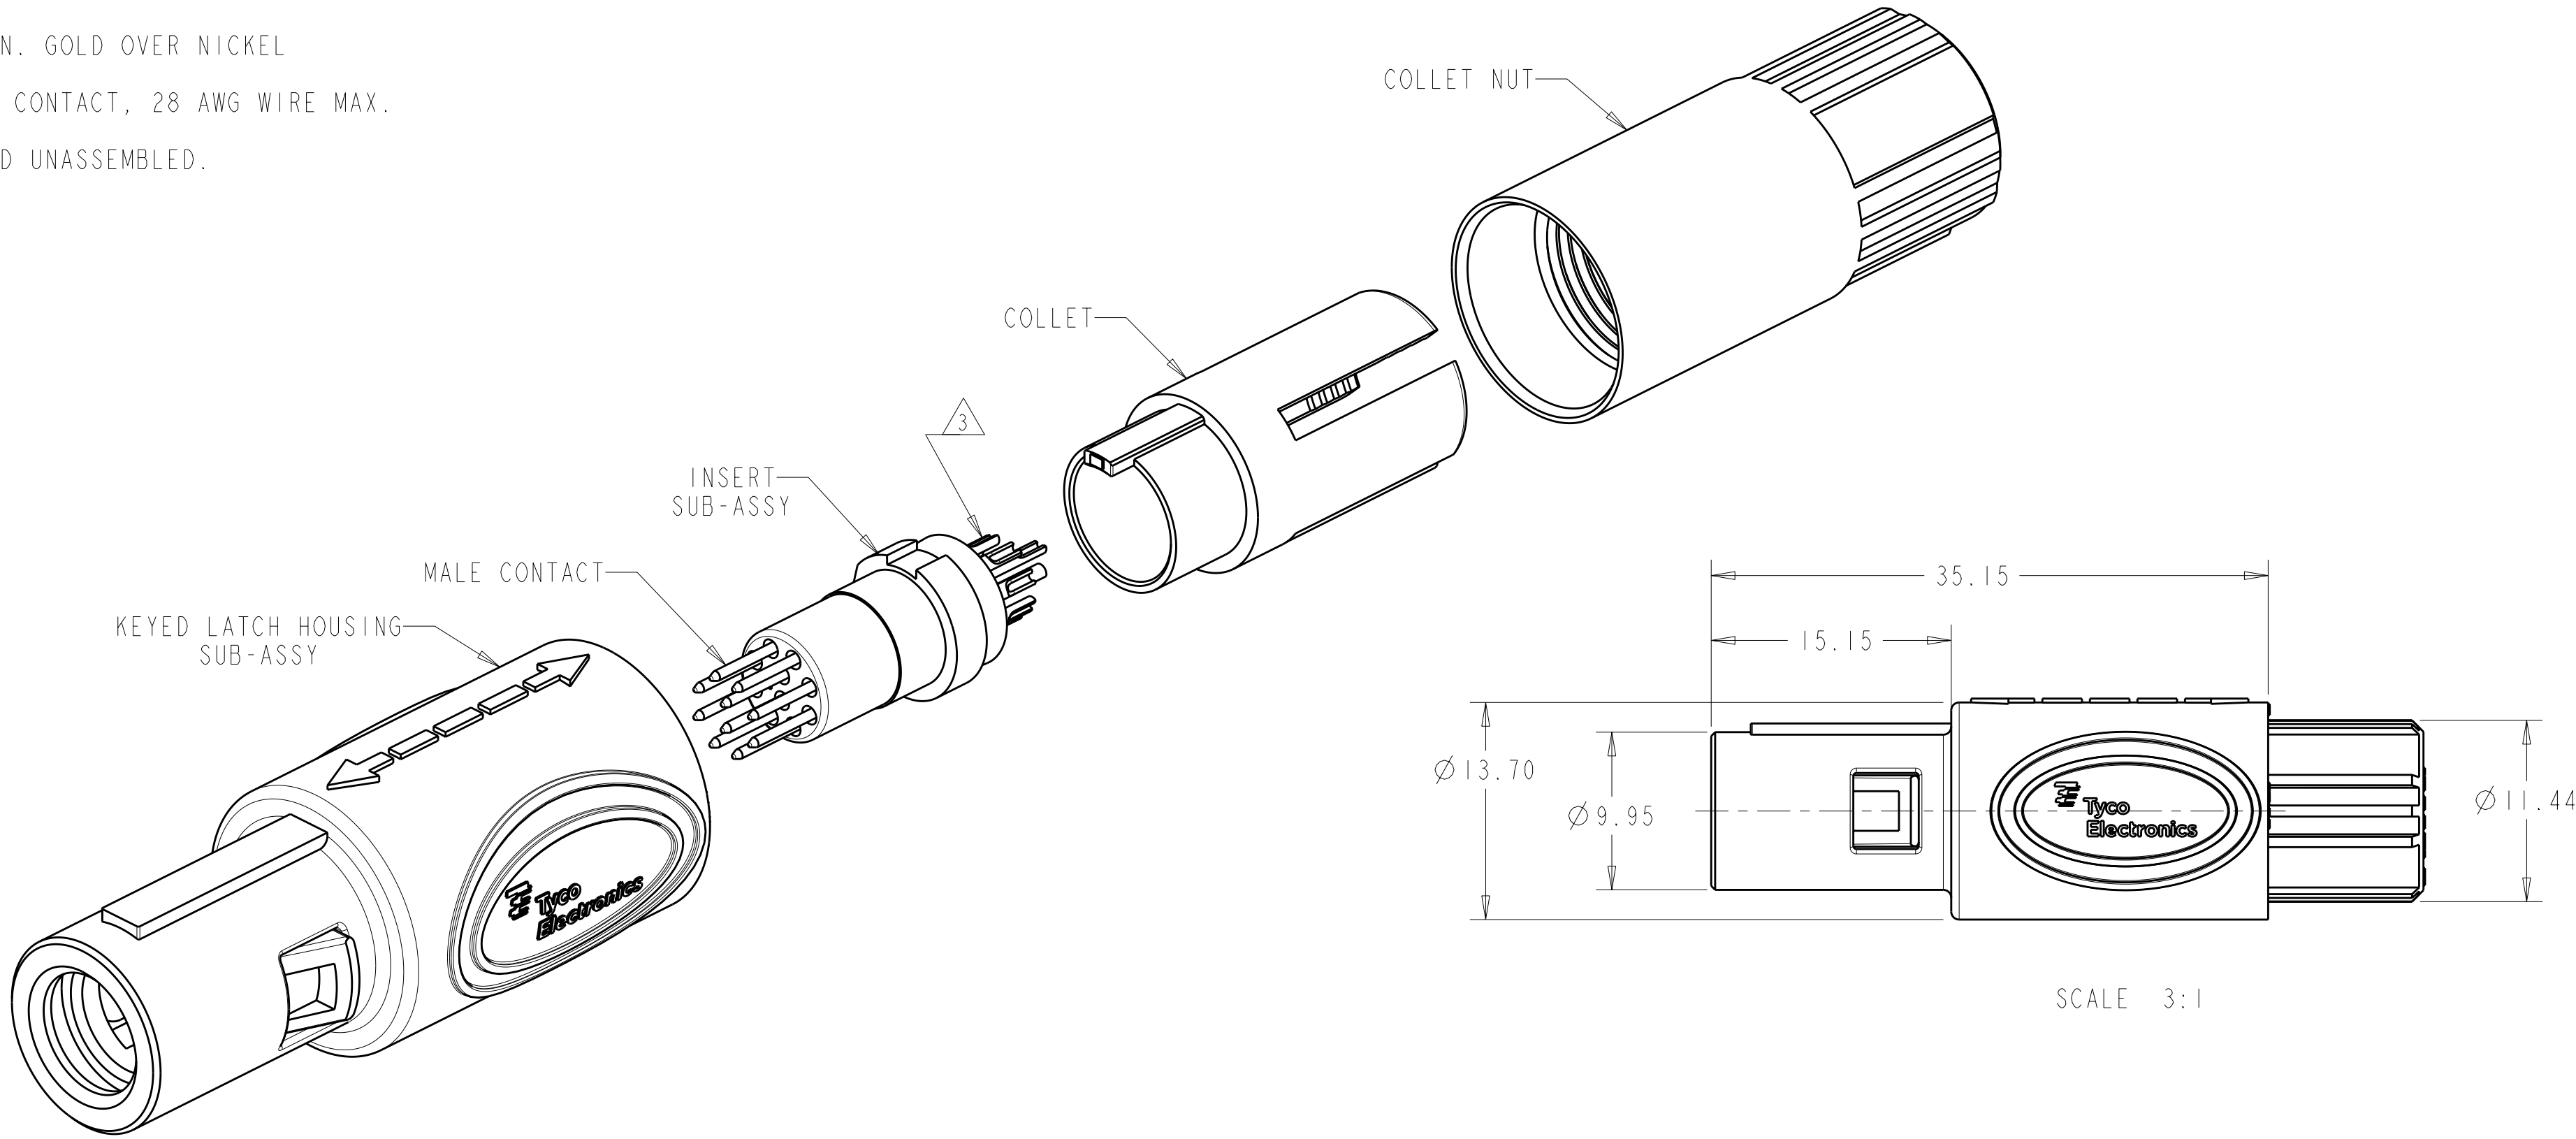


SCALE 3:1

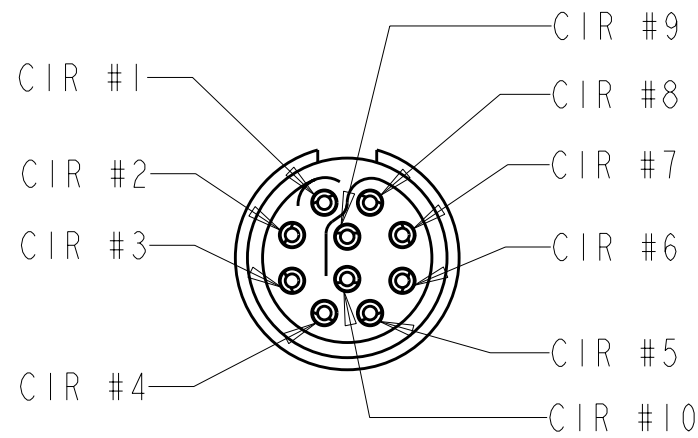

INSERT SUB-ASSY
CIRCUIT DESIGNATION VIEW

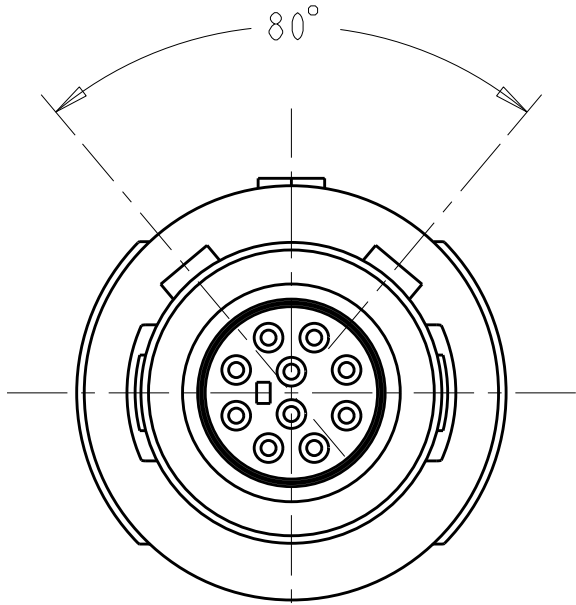


80° KEYING
SCALE 4:1

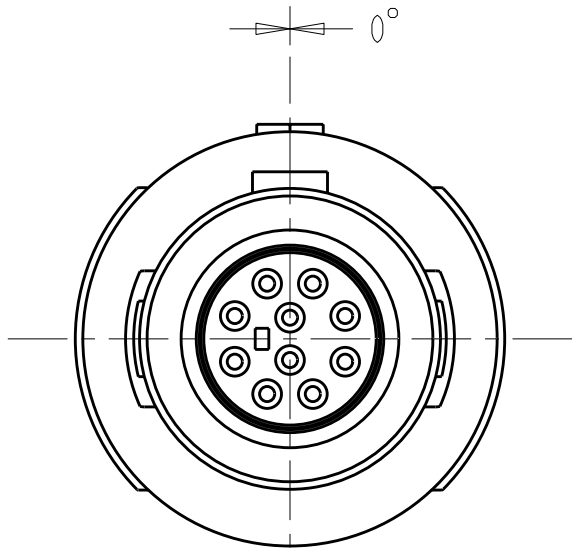

0° KEYING
SCALE 4:1

SEE SHEET 2 FOR
PART NUMBER SELECTION

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. MILLER CHK L. BREKOSKY APVD - PRODUCT SPEC 108-2249 APPLICATION SPEC 114-13184 WEIGHT -		09MAR2006 09MAR2006		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.13 2 PLC ±0.08 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		NAME 10 POSITION, CABLE COLLET STRAIGHT PLUG ASSEMBLY 0 AND 80 DEGREE KEYING			
				SIZE A2		CAGE CODE 00779	
MATERIAL 				DRAWING NO C-1877848		RESTRICTED TO -	
				SCALE 4:1		SHEET 1 OF 3	
CUSTOMER DRAWING				REV B3			

