

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
 CONTACT: BRASS
 NUT: BRASS
 O-RING: EPDM
 SHELL: BRASS

FINISH


CONTACT: GOLD PLATED
 OVER NICKEL
 NUT: NICKEL PLATED
 SHELL: NICKEL PLATED

ELECTRICAL

RATED CURRENT: 16A
 RATED VOLTAGE: 63V
 WATER PROOF: IP67
 WIRE AWG: 14 AWG MAX

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C

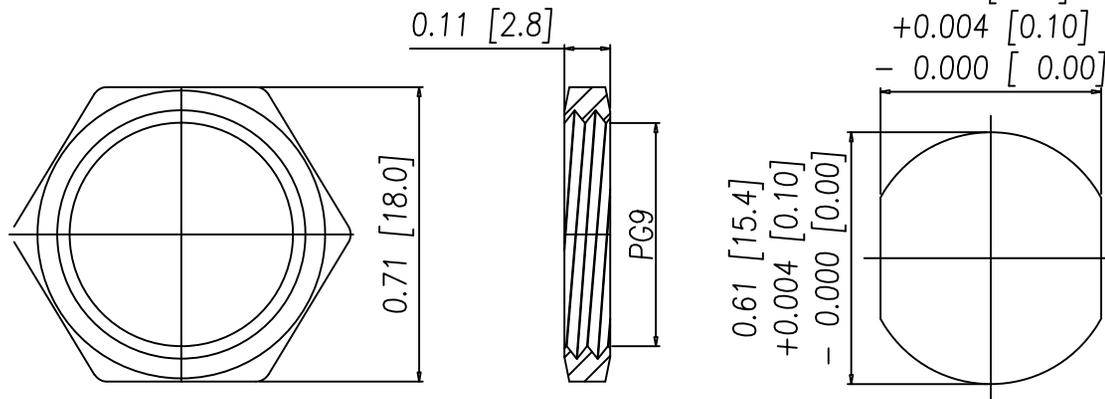

859-LP5-103R00Y

1 = GOLD FLASH
 4 = 10μ" GOLD

RECOMMEND PANEL CUT-OUT

NUT

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
 J. KADEL
 DATE:
 08/01/2018

NorComp

SCALE: NTS	SHEET 1	OF 1	REV 4
DWG NO.		859-LP5-103R00Y	