
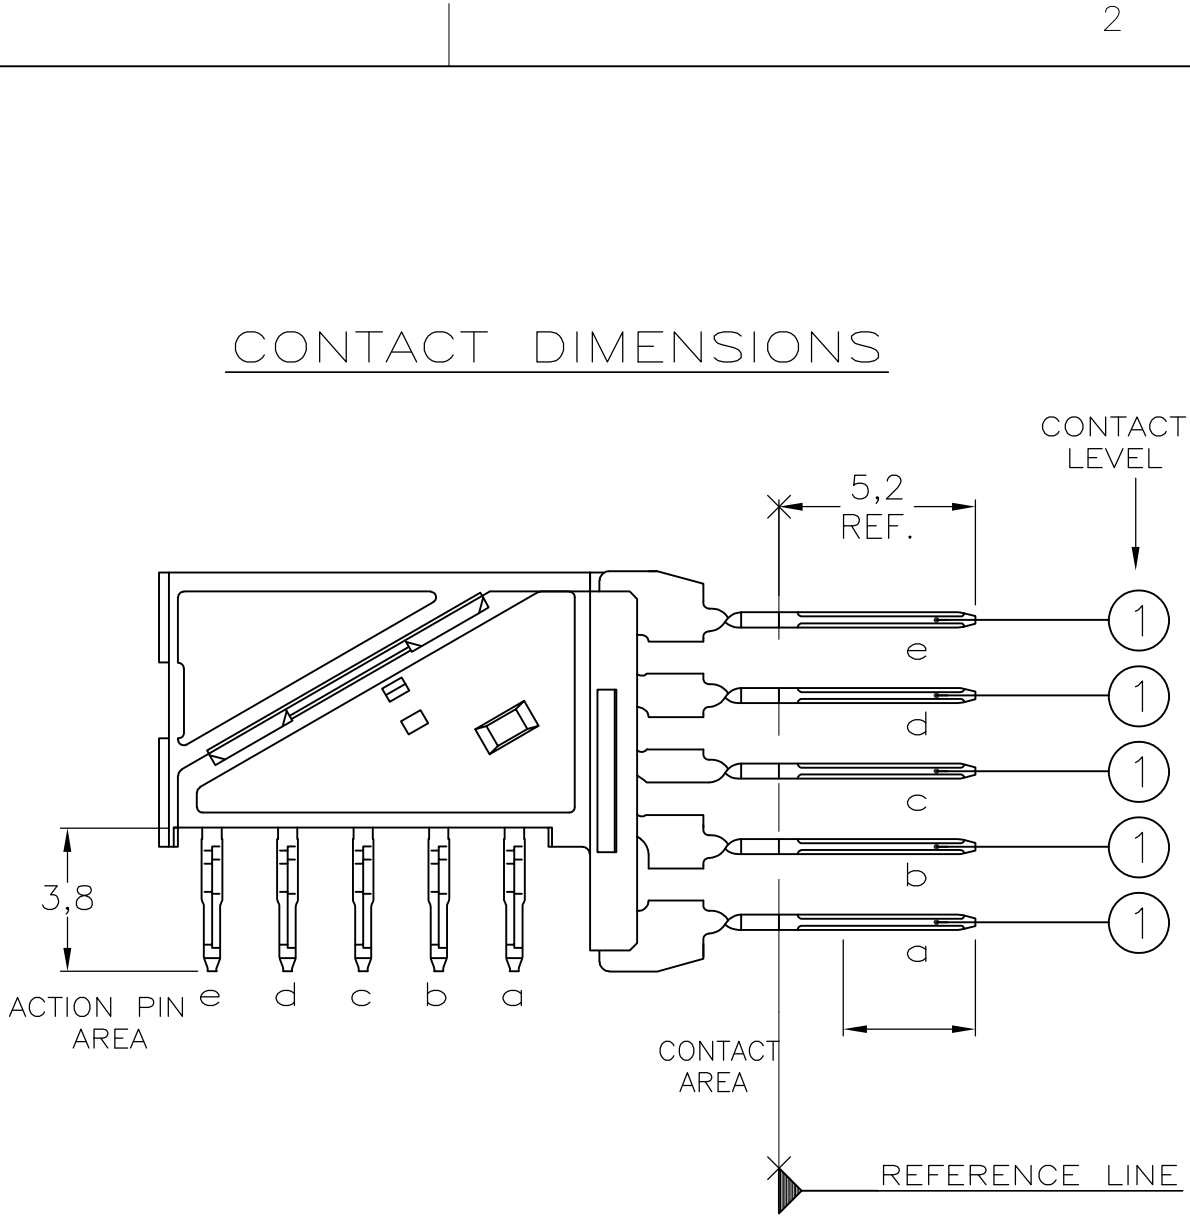


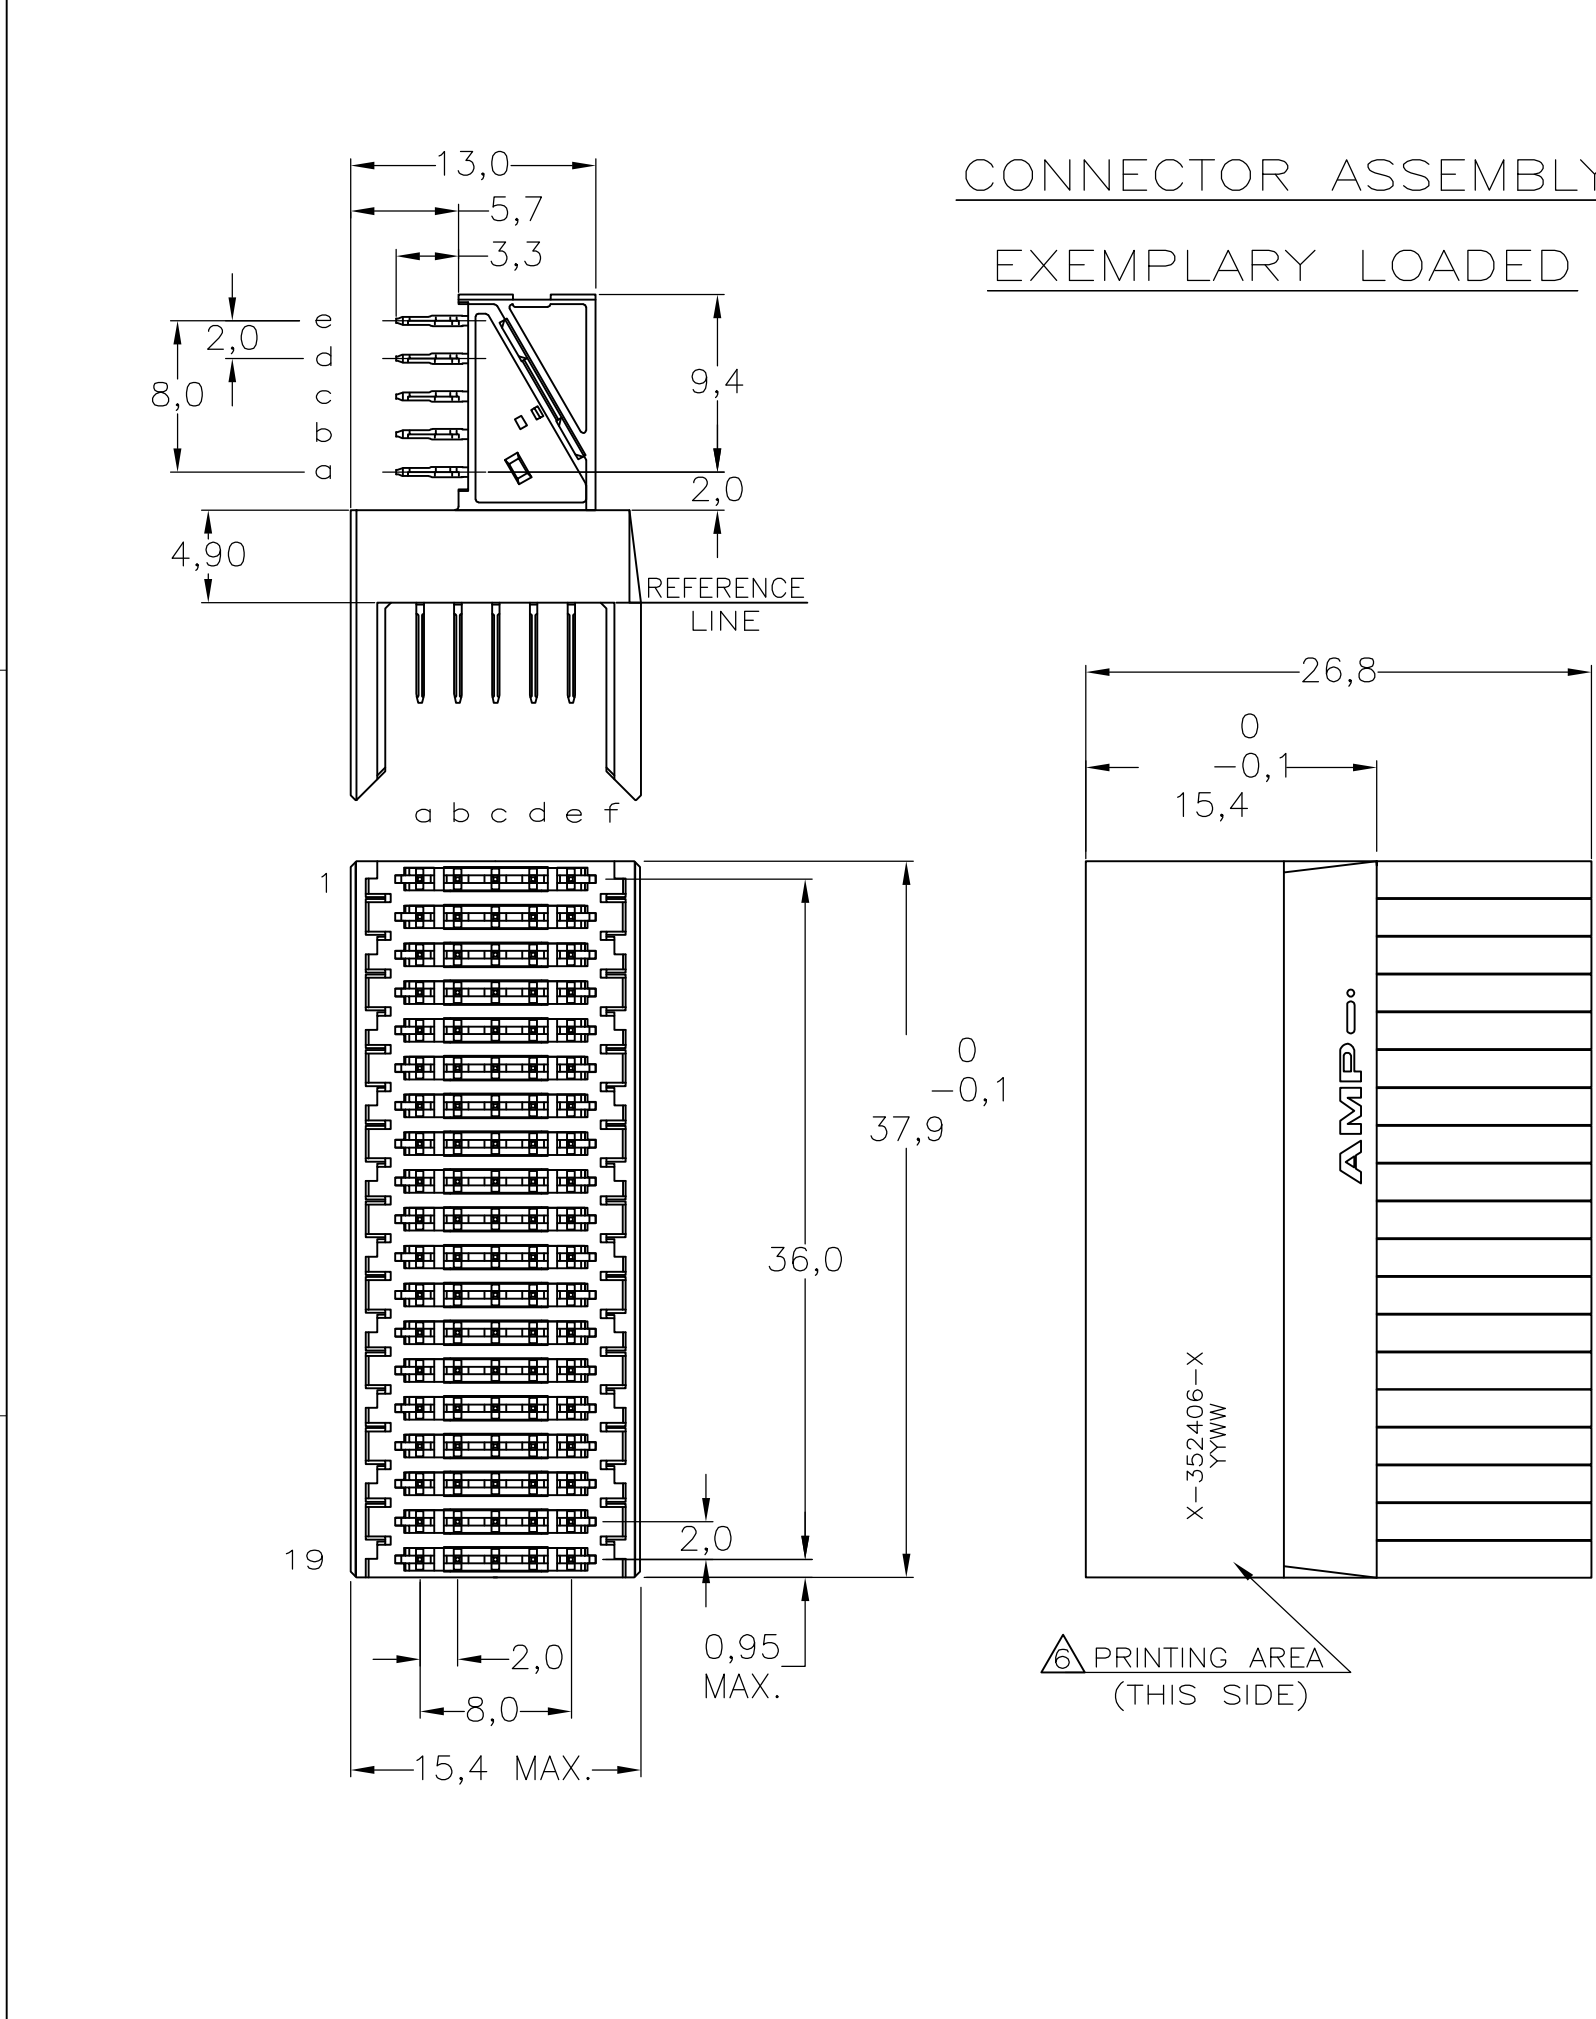

LOC
H

DIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
F		PER ECR-12-019004	1NOV12	D.S	A.C

RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN

CONTACT LAYOUT

	a	b	c	d	e
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1
6	1	1	1	1	1
7	1	1	1	1	1
8	1	1	1	1	1
9	1	1	1	1	1
10	1	1	1	1	1
11	1	1	1	1	1
12	1	1	1	1	1
13	1	1	1	1	1
14	1	1	1	1	1
15	1	1	1	1	1
16	1	1	1	1	1
17	1	1	1	1	1
18	1	1	1	1	1
19	1	1	1	1	1

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

352406

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
L.v.d.HEIJDEN
21MAR98

CHK
D. TRUREN
21MAR98

APVD
F.V.KONINGSBRUGGE
-

PRODUCT SPEC
108-19082

APPLICATION SPEC
114-19029

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

Z-PACK 2MM HM TYPE B19
95 POS. RIGHT ANGLE MALE
CONNECTOR ASSEMBLY

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-352406

RESTRICTED TO
-

SCALE
NTS

SHEET
1 of 1

REV
F