


R/A PLUG RECEPTACLE FOR PCB

R214.665.850

SOLDER LEGS - STICK OF 30

Series : SMZ

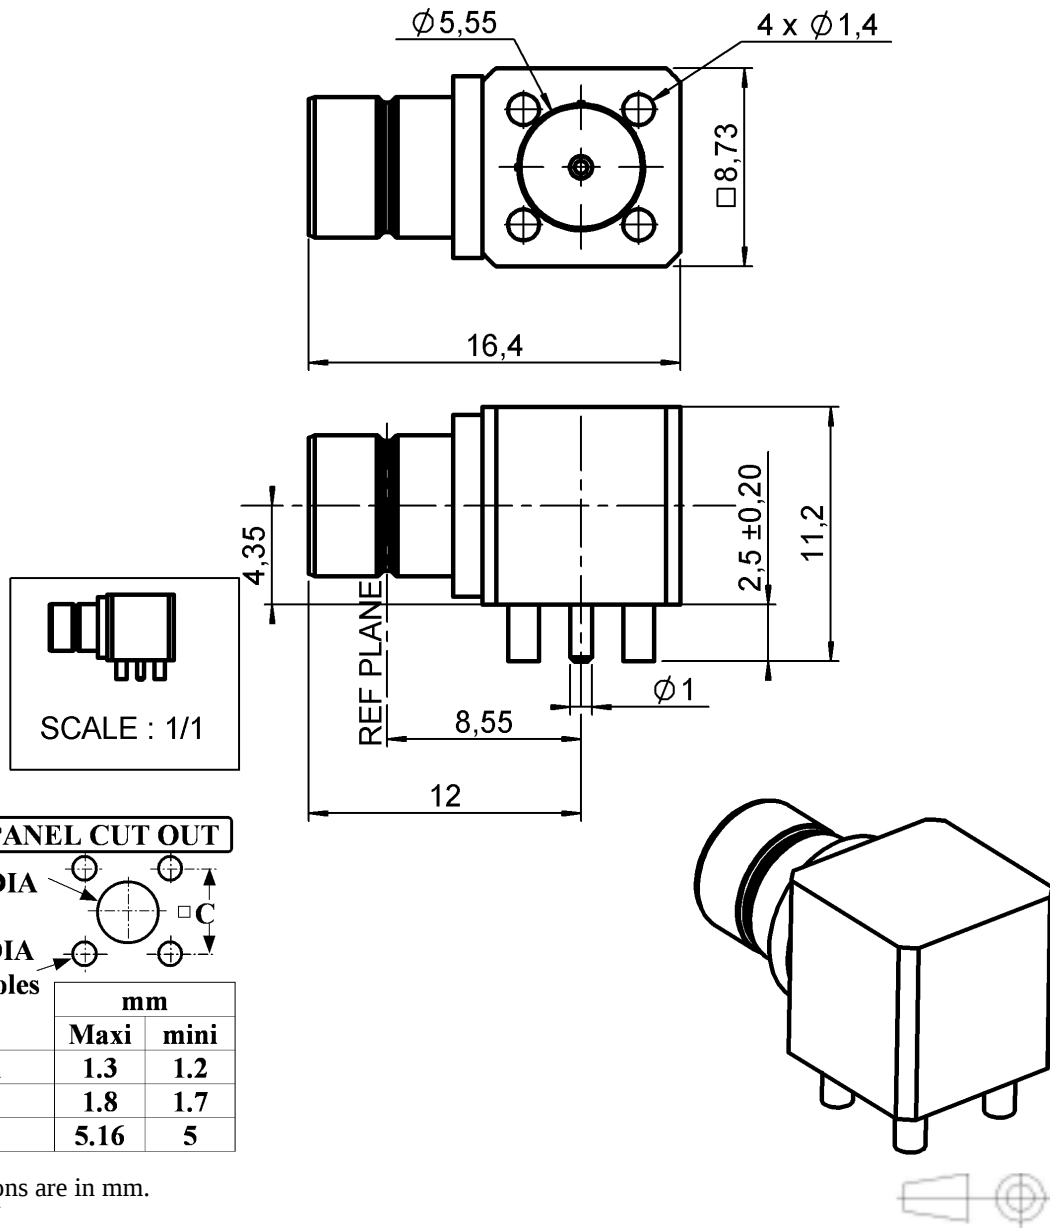

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	BRASS	GOLD 0.2 OVER NICKEL 2
INSULATOR	PTFE	
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0602 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R/A PLUG RECEPTACLE FOR PCB**R214.665.850****SOLDER LEGS - STICK OF 30**

Series : SMZ

PACKAGING

Standard	Unit	Other
30	-	Contact us

SPECIFICATION

Package label 102 01-1003 UEn Rev F
1301-RPT 368 21 Uen/3 Rev.D

ELECTRICAL CHARACTERISTICS

Impedance		75 Ω
Frequency		0-2.4 GHz
VSWR	1.25 +	0,2000 x F(GHz) Maxi
Insertion loss		0.115 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	60 - F(GHz)) dB Maxi
Voltage rating		500 Veff Maxi
Dielectric withstanding voltage		1500 Veff mini
Insulation resistance		500 M Ω mini

ENVIRONMENTAL

Operating temperature	-55/+155 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHERS CHARACTERISTICS

Assembly instruction

Others :

-

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	4,9589 g


Issue : 0602 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALL®**

R/A PLUG RECEPTACLE FOR PCB**SOLDER LEGS - STICK OF 30****R214.665.850**

Series : SMZ

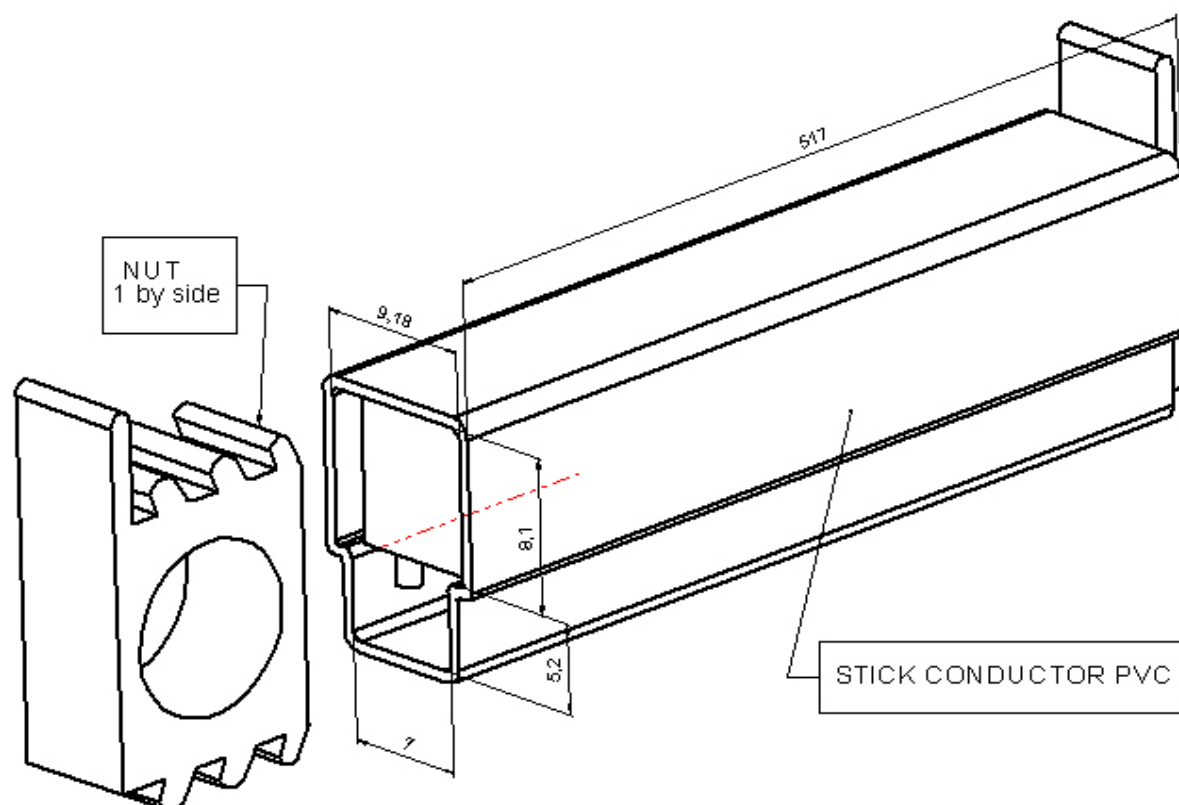**Issue : 0602 D**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALL®**