

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUL2015	DL	CW

D

D

C





C

B

B

A


A

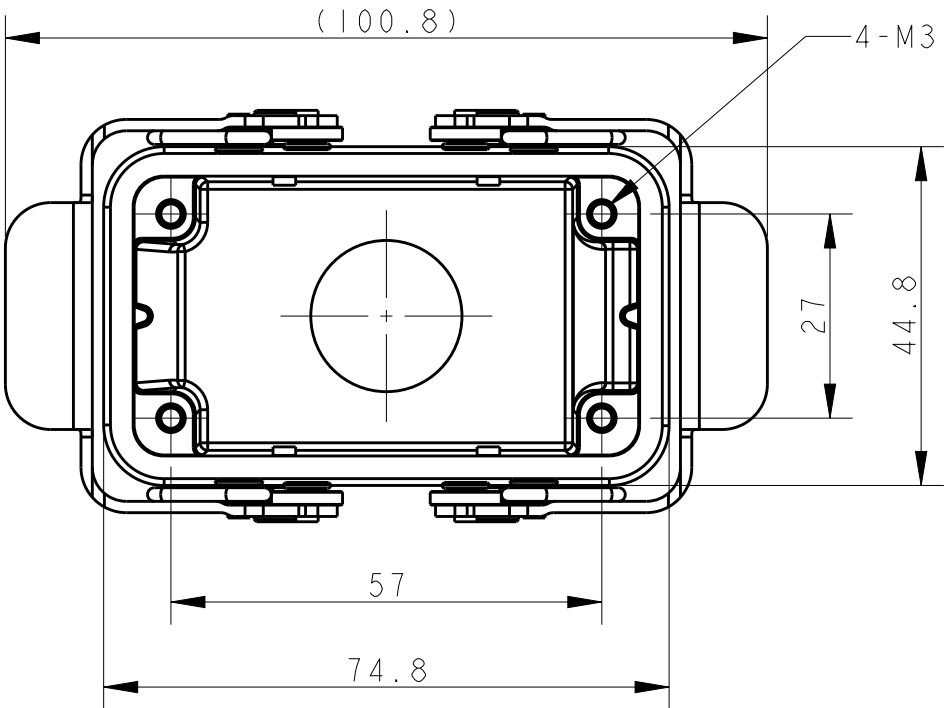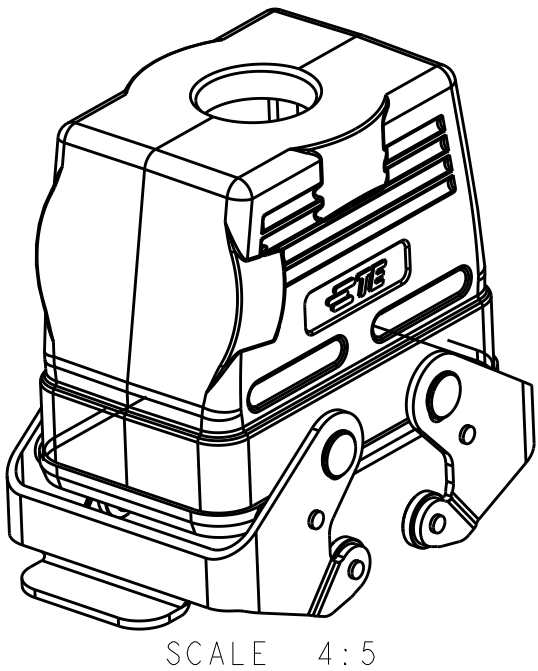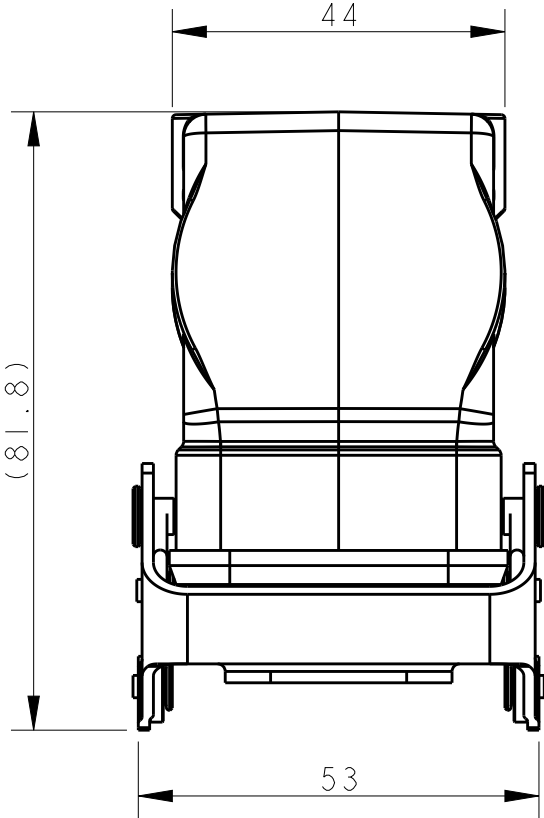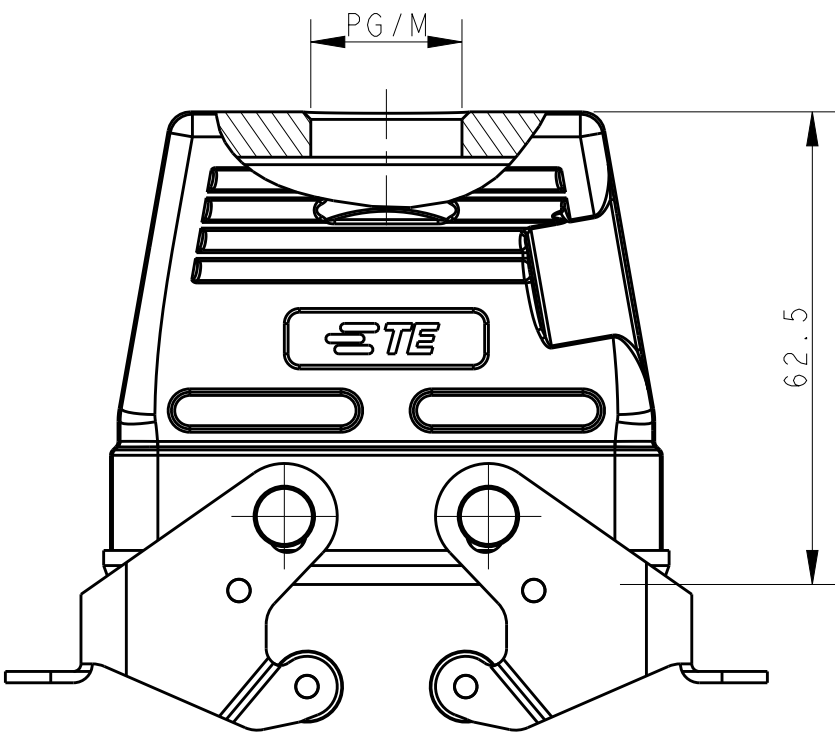

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI71010116-000	H10B-TBFS-PG16	PG16
TI71010120-000	H10B-TBFS-M20	M20
TI71010125-000	H10B-TBFS-M25	M25
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUL2015	TE TE Connectivity					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK CHRIS WANG 08JUL2015						
		APVD XU XIANG 08JUL2015						
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	PRODUCT SPEC 108-137013	NAME H10B-TBFS-PG/M					
MATERIAL TBD	FINISH -	APPLICATION SPEC 114-137013						
-	-	WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-TI7101011XX000	RESTRICTED TO -		
CUSTOMER DRAWING					SCALE 1:1	SHEET 1	OF 1	REV A