



Part Number:

254-ECM60-RO

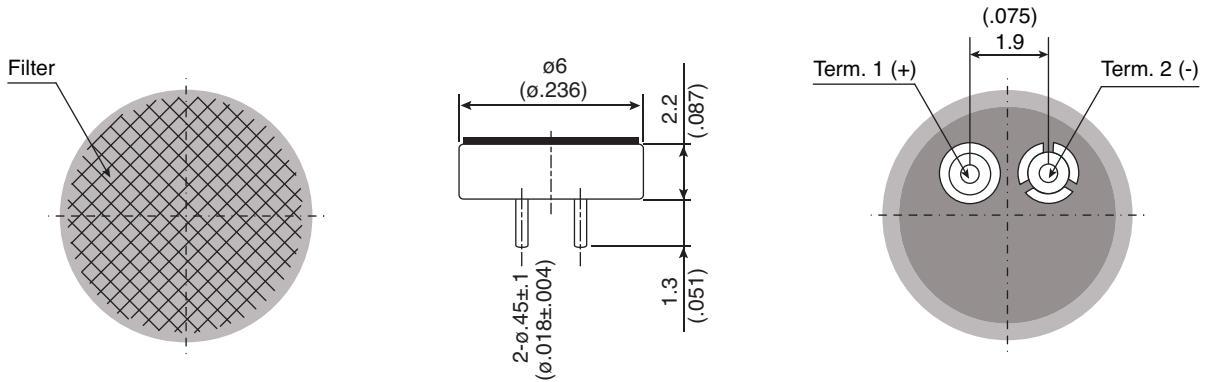

Frequency Response Curve

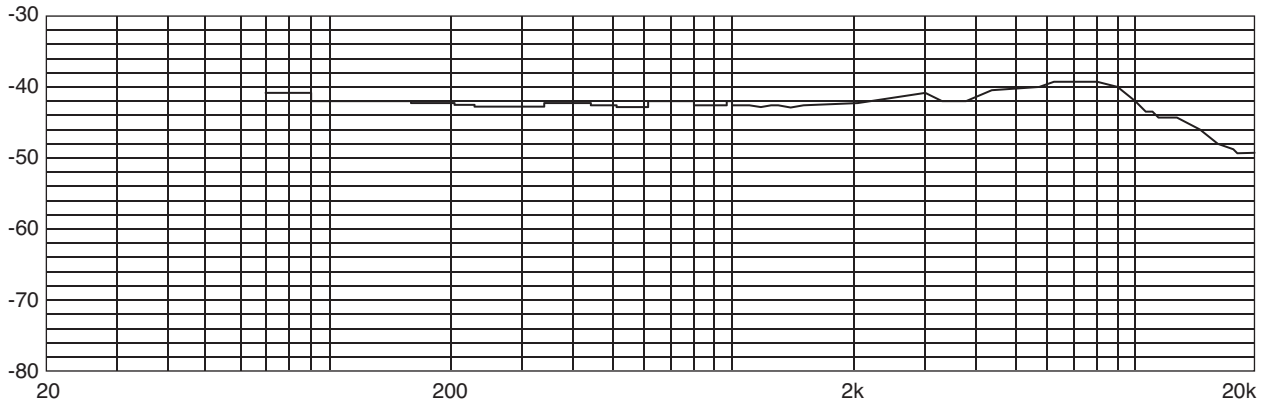

Microphone

KT-400337

Electrical Specifications:

- Sensitivity: -40 ± 3 dB (0dB=1V/Pa,1KHz)
- Output Impedance: 2.2K Ω (Max)
- Frequency Range: 100-20KHz
- Standard Operation Voltage: 2.0V
- Current Consumption: 0.5mA(Max)
- S/N Ratio: ≥ 58 dB

Mechanical Specifications:

- Operating temperature: 20 ~ +60°C
- Storage temperature: 25 ~ +70°C

Soldering Specifications:

- Recommend using constant searing-iron in 30W
- Temperature Range 330 ± 5 °C for 2 seconds

Note:

- RoHS Compliant