

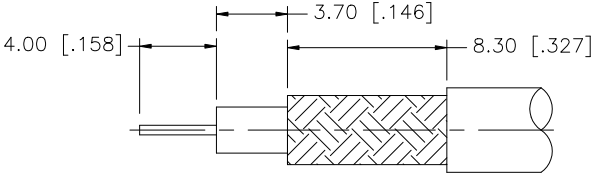
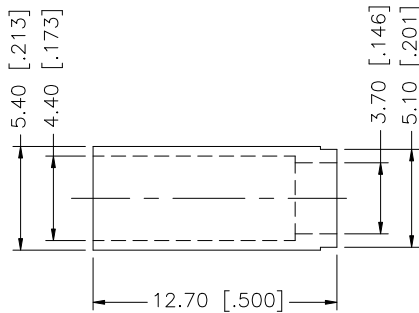


REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT
B	08/14/03	MODIFY DESCRIPTION
C	09/16/07	ADD NOTES 1 THROUGH 4

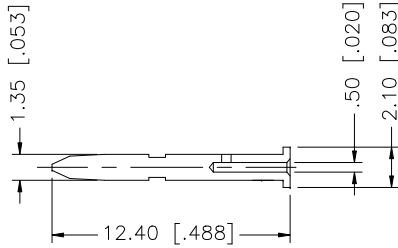

RECOMMENDED CABLE
STRIPPING DIM'S

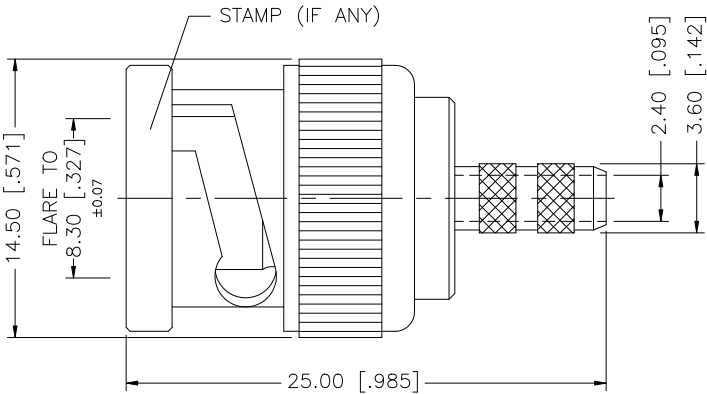

NOTES:

1. IMPEDANCE 75ohms.
2. FREQUENCY RANGE – DC– 4GHz
3. VSWR (RETURN LOSS) 1.3 TO 4GHz
4. DURABILITY – 500 CYCLES MIN.
5. CRIMPED FERRULE HEX CRIMP SIZE .178"
6. CRIMPED CONTACT PIN SQ. CRIMP SIZE .043"

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
7					DRAWN	G.R.S.						09/16/07			
6					CHECKED										
5	FERRULE	COPPER	NICKEL		1	ISSUED		PART DESCRIPTION							
4	GASKET	RUBBER	RED		1	SHEET	1 OF 1	BNC CRIMP PLUG (FOR AT&T 735A CABLE – 75ohm)							
3	INSULATOR	TEFLON	NATURAL		1			PART NO.							
2	CONTACT PIN	BRASS	GOLD		1			112950							
1	SHELL/BODY	BRASS	NICKEL		1			DWG. NO.							
	DESCRIPTION	MATERIAL	FINISH		QTY		CAD FILE	C:/112/112950.DWG	112950.DWG	REV.	C	SIZE	A	SCALE	NA