

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0366430002

Status:

Active

Overview:

MLX™ Power Connectors


Description:

2.13mm Diameter MLX™ Plug Housing, 2 Circuit, PA Polyamide Nylon 6/6 94V-2, Glow Wire Compatible

Documents:

3D Model
Drawing (PDF)

[RoHS Certificate of Compliance \(PDF\)](#)

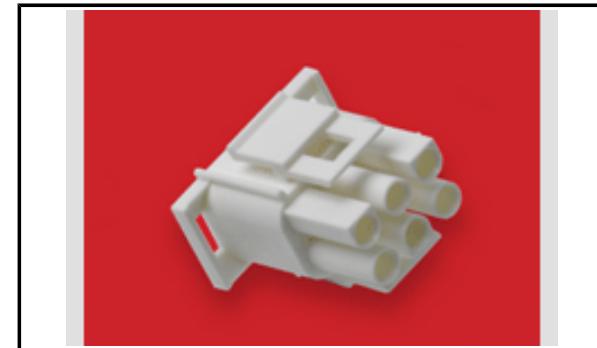

Series image - Reference only

Agency Certification

CSA
UL

LR19980
E29179

General

Product Family
Series
Application
Comments

Crimp Housings

[36643](#)

Power, Wire-to-Wire

This Molex product is manufactured from material that has the following ratings, tested by independent agencies : a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.<P><P>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).<P>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.

[MLX™ Power Connectors](#)

MLX™

800756934167

Overview
Product Name
UPC

Physical

Circuits (maximum)
Circuits Detail
Color - Resin
Flammability
Gender
Glow-Wire Compliant
Keying to Mating Part
Lock to Mating Part
Material - Resin
Net Weight
Number of Rows
Packaging Type
Panel Mount
Pitch - Mating Interface
Polarized to Mating Part
Stackable

2

2

Natural

94V-2

Plug

Yes

None

Yes

Nylon

2.200/g

1

Bag

No

6.35mm

Yes

No

EU ELV

Not Relevant

EU RoHS

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

China RoHS

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

ELV

Not Relevant

Search Parts in this Series

[36643 Series](#)

Mates With

[42022 Diameter MLX™ Pin and Socket Receptacle](#)

Use With

[MLX™ Crimp Terminal 42023 , 42024](#)

Temperature Range - Operating

-55°C to +105°C

Electrical

Current - Maximum per Contact

20.0A

Material Info

This document was generated on 07/15/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION