

HEYClip™ Nylon UVX* SunRunner® 2 Series Cable Clips for Micro-Inverter Cables

*Extended UV Protection

| PANEL THICKNESS CLAMPING RANGE | | | | WIRE DIA. RANGE | | PART NO. | DESCRIPTION | FOOTPRINT | | REAR TAB LENGTH | |
|-----------------------------------|-----|---------|-----|--------------------|----------|-------------|-------------------------------|------------|-------------|--------------------|------|
| Minimum | | Maximum | | in. | mm. | | | in. | mm. | in. | mm. |
| in. | mm. | in. | mm. | | | | | | | | |
| SunRunner 2 UVX | | | | | | | | | | | |
| .08 | 2,0 | .25 | 6,4 | .30 - .47 | 7,6-12,0 | S6463 | SunRunner 2 UVX 100 Pack | .50 x 1.44 | 12,7 x 36,6 | .94 | 23,9 |
| | | | | | | S6473 | SunRunner 2 UVX Bulk | | | | |
| SunRunner 2-R UVX | | | | | | | | | | | |
| .38 | 9,7 | .38 | 9,7 | .30 - .47 | 7,6-12,0 | S6462 | SunRunner 2-R UVX 100 Pack | .50 x 1.44 | 12,7 x 36,6 | .56 | 14,2 |
| | | | | | | S6472 | SunRunner 2-R UVX Bulk | | | | |
| SunRunner 2-U UVX | | | | | | | | | | | |
| .25 | 6,4 | .25 | 6,4 | .30 - .47 | 7,6-12,0 | S6461 | SunRunner 2-U UVX 100 Pack | .50 x 1.44 | 12,7 x 36,6 | .53 | 13,5 |
| | | | | | | S6471 | SunRunner 2-U UVX Bulk | | | | |



- **Designed to hold Micro-Inverter cables** .413" to .472" (10,5 to 12,0 mm) in diameter.
- Constructed from extended protection nylon UV material for **lower cost**, excellent strength, and corrosion protection from outdoor exposure.
- Smooth clip edges prevent damage to cable insulation.
- “S” hook clip design will fit a wide variety of extruded aluminum profiles.
- **SunRunner 2 UVX** is designed for solar mounting frames such as the ones used by Unirac, Solar Mount and Mounting Systems.
- **SunRunner 2-R UVX** is designed for racking systems such as the ones used by Haticon Solar and S:FLEX.
- **SunRunner 2-U UVX** features a shorter “S” hook for Unirac and other similar frame profiles.
- Neatly dresses cables on PV panels or along mounting frame channels from .080" (2,0 mm) to .250" (6,4 mm) thick.
- Molded from UV/Heat Stabilized Nylon.
- See page 1-9 for typical rack profile applications.







SunRunner 2 UVX



SunRunner 2-R UVX



SunRunner 2-U UVX

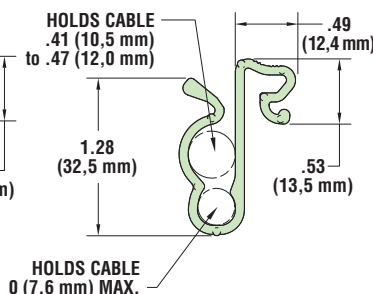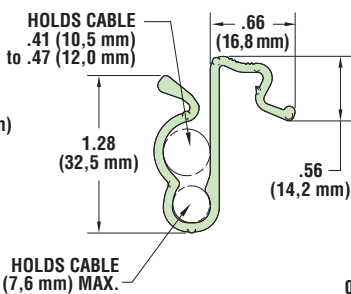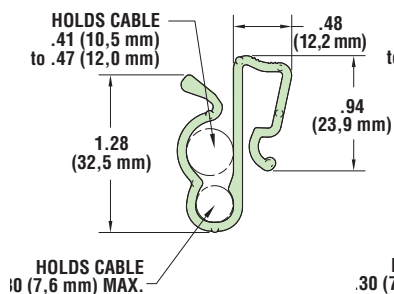

| | |
|---------------------|---|
| Material | Nylon 6/6 with extended UV capabilities |
| Flammability Rating | 94V-2 |
| Temperature Range | -4°F (-18°C) to 185°F (85°C) |

*Quick
Specs*