




TOP VIEW

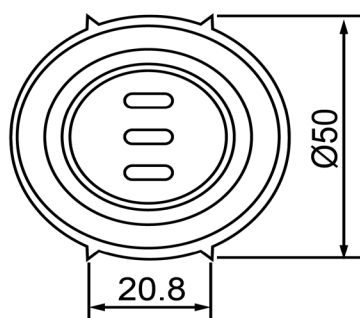

SIDE VIEW

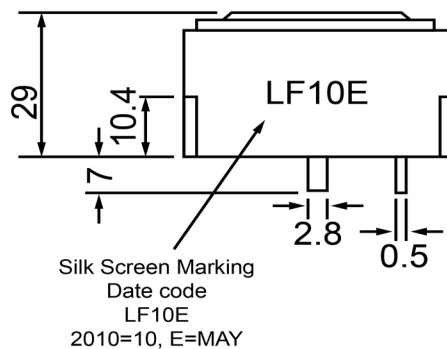

BOTTOM VIEW

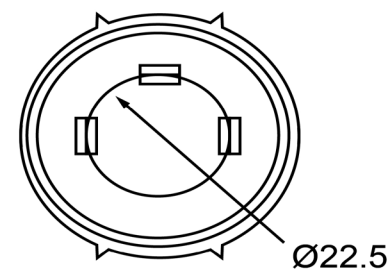

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	2,500	(Hz)									
Rated Voltage	12	(V)									
SPL @ 10cm	115	(dBA)									
Tone	Single										
Mount Type	Thru-hole										
Voltage Range	3 ~ 13	(V)									
Max Rated Current	75	(mA)									
Housing Material	ABS										
Operating Temperature	-20 ~ +60	°C									
Storage Temperature	-20 ~ +60	°C									
Weight	40	(g)									
					Drawn by		Date	Checked by	Date	Approved by	Date
					A.B.		10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
					IP502512-1						