


NOTES:

1. BRAIDED STRAP IS #4 AWG STRANDED COPPER, TIN PLATED
FERRULES ARE TIN PLATED COPPER.
2. DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
3. PARTS ARE UL LISTED AND CSA CERTIFIED FOR BONDING
APPLICATIONS ONLY.

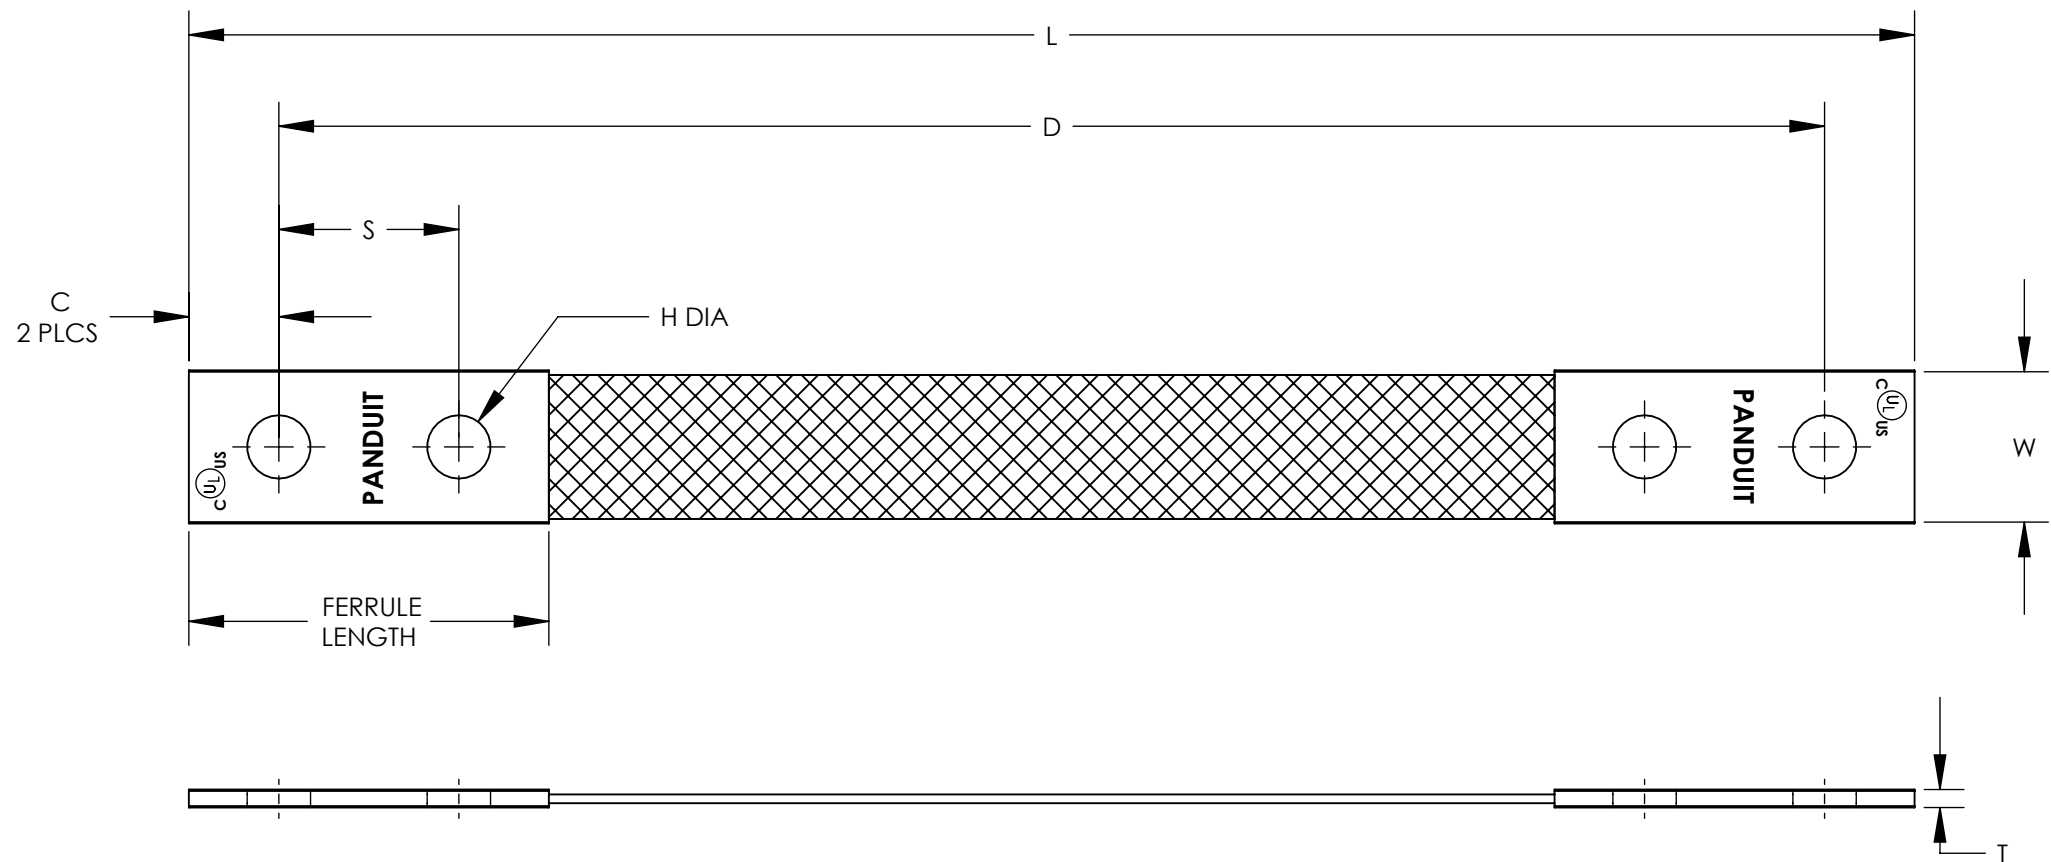

PANDUIT PART NUMBER	BRAIDED STRAP SIZE	INSULATION	NO. OF BRAIDS IN FERRULE	DIMENSIONS - IN [mm]							
				L	D	S	W	C	T	H DIA	FERRULE LENGTH
BS201246EU	4 AWG	NO	1	12.00 [304.8]	10.75 [273.1]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [36.5]
BS201846EU	4 AWG	NO	1	18.00 [457.2]	16.75 [425.5]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [36.5]
BS202446EU	4 AWG	NO	1	24.00 [609.6]	22.75 [577.9]	1.25 [31.8]	1.06 [27.0]	.63 [15.9]	0.13 [3.3]	0.44 [11.2]	2.50 [36.5]

								PANDUIT CORP.	TINLEY PARK, ILLINOIS
05	6/11	JHNU	JHNU	REVISED TONGUE MARKINGS: cULus WAS UL	N11002BF-C41745	RGB	RGB	TWO-HOLE BRAIDED BONDING STRAPS CUSTOMER DRAWING	
04	2/09	JHNU	JHNU	REMOVED CSA SYMBOL FROM DRAWING					
03	1/09	JHNU	JHNU	REMOVED AMPERE RATING FROM TABLE					
02	1/09	JHNU	JHNU	REVISED NOTES ADDED FERRULE INFORMATION TO TABLE				UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .X) ± (.XXX) ± (.XX) ± ANGLES ±	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION
01	10/08	JHNU	DWDA	REVISED NOTE 1: #4 AWG WAS #6, REMOVED NOTE 2				DRAWN BY JHNU MAT'L:	SCALE NONE
00	2/08	JHNU	DWDA	DRAWING RELEASED				DATE 2/08	DRAWING NO / CAD FILE DWG B SIZE
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP	CHK'D	C41745_05