

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:



PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3	@20°C
D.C. RESISTANCE	3-2	@20°C
D.C. RESISTANCE	6-5	@20°C
D.C. RESISTANCE	9-10	@20°C
D.C. RESISTANCE	10-8	@20°C
D.C. RESISTANCE	13-11	@20°C
INDUCTANCE	1-2	10kHz, 100mVAC, Ls
SATURATION CURRENT		20% rolloff from initial
LEAKAGE INDUCTANCE	1-2	tie(5+6, 8+9+10+11+13), 100kHz, 100mVAC, Ls
DIELECTRIC	1-9	tie(2+6, 8+13), 3750VAC, 1 second
TURNS RATIO		(1-2):(6-5)
TURNS RATIO		(1-2):(13-11)
TURNS RATIO		(1-2):(9-10)
TURNS RATIO		(1-2):(10-8)
TURNS RATIO		(1-3):(3-2)

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID

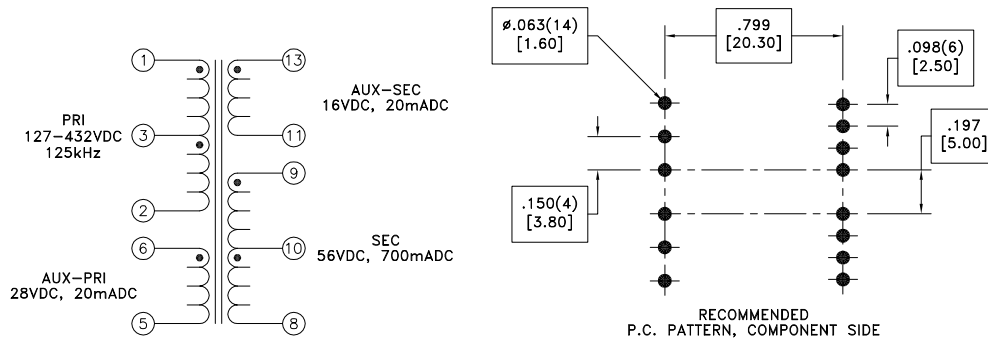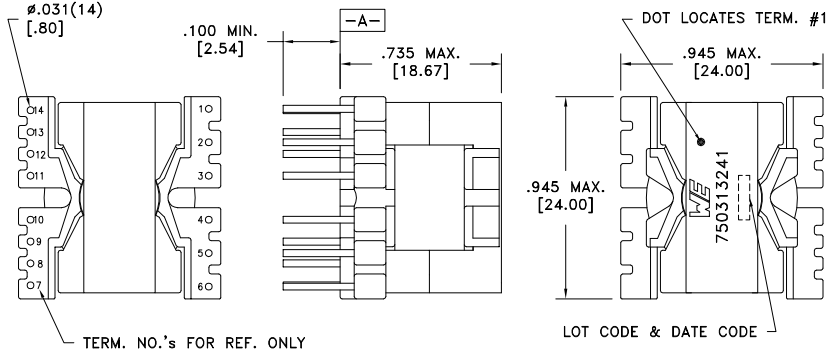

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tray		Angles: $\pm 1^\circ$	TRANSFORMER	750313241
		PKG-0100		Fractions: $\pm 1/64$		
		www.we-online.com/midcom		Decimals: $\pm .005$ [1.3]		
				Footprint: $\pm .001$ [.03]		
6A	11/12	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750313241	SPECIFICATION SHEET 1 OF 1