


DESCRIPTION: MALE - 0.370 RIGHT ANGLE / MACHINED

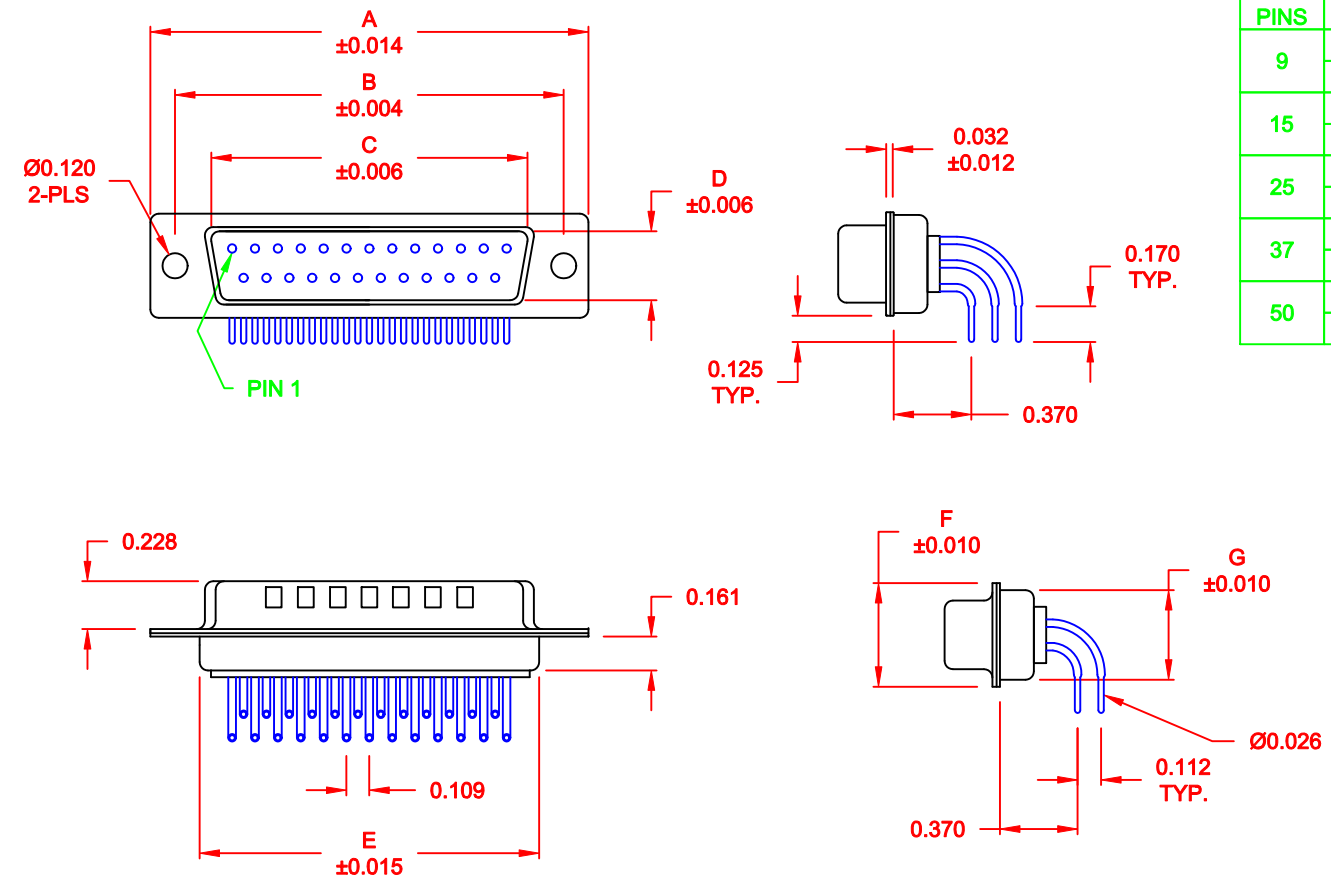

No. OF PINS	DIMENSIONS						
	A	B	C	D	E	F	G
9	1.213	0.984	0.669	0.331	0.760	0.480	0.429
	30.80	24.99	17.00	8.40	19.30	12.20	10.90
15	1.541	1.312	0.996	0.331	1.083	0.480	0.429
	39.15	33.32	25.30	8.40	27.51	12.20	10.90
25	2.088	1.852	1.535	0.331	1.630	0.480	0.429
	53.04	47.04	39.00	8.40	41.40	12.20	10.90
37	2.729	2.500	2.181	0.331	2.276	0.480	0.429
	69.32	63.50	55.40	8.40	57.81	12.20	10.90
50	2.635	2.406	2.079	0.437	2.182	0.598	0.535
	66.93	61.11	52.80	11.10	55.42	15.20	13.60

174-YYY-112RYY1

SERIES _____

POSITIONS _____

009 _____

015 _____

025 _____

037 _____

050 _____

GENDER _____

1 = MALE

TERMINATION _____

1 = PC MOUNTING

SHELL PLATING _____

2 = TIN (GROUND INDENTS)

RoHS COMPLIANT _____

HARDWARE OPTIONS _____

00 = NO HARDWARE

14 = SHORT BRACKET WITH 4-40 SCREW LOCK

24 = SHORT BRACKET WITH 4-40 SCREW

PLATING OPTIONS _____

1 = GOLD FLASH

2 = 30MICRO-INCH GOLD

MATERIAL:

SHELL: STEEL, TIN PLATED

INSULATOR: UL 94V-O RATED, BEIGE PBTP

PROCESS TEMP.: 260° PROCESS TEMPERATURE

CONTACT: BRASS

ELECTRICAL:

CURRENT RATING: 5 AMPS

CONTACT RESISTANCE: 15 mOhms Max.

INSULATION RESISTANCE: 1,000 MOhms min.






VOLTAGE: 500VAC FOR 1 MINUTE

TEMPERATURE: -50° C TO 100° C

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS		DATE: 09-16-05	
			CHECKED:		DATE:	
	NorComp		SCALE: 1 : 1	SHEET 1 OF 3	REV 5	
DWG NO. 174-YYY-112RYY1						

RoHS COMPLIANT

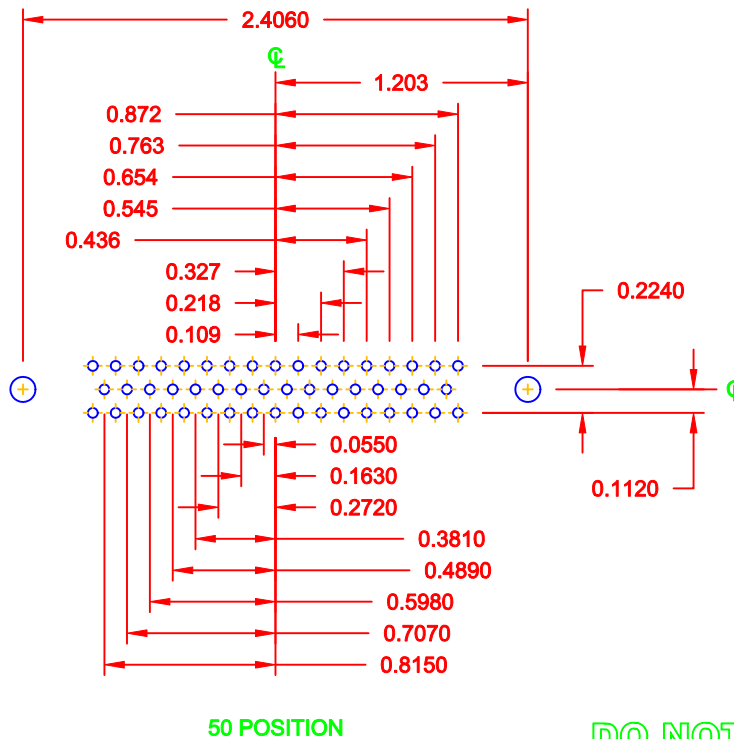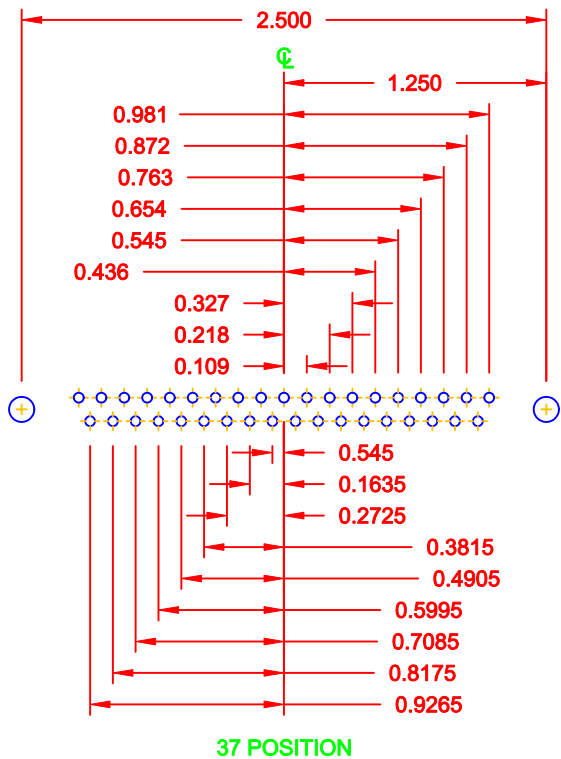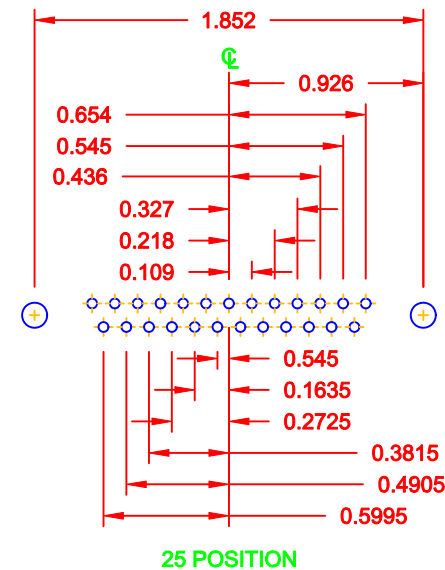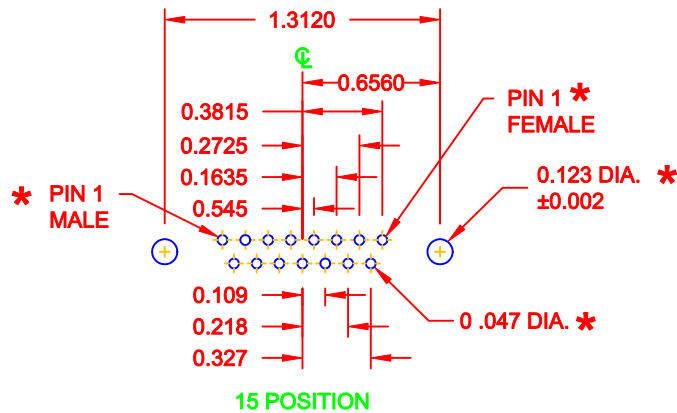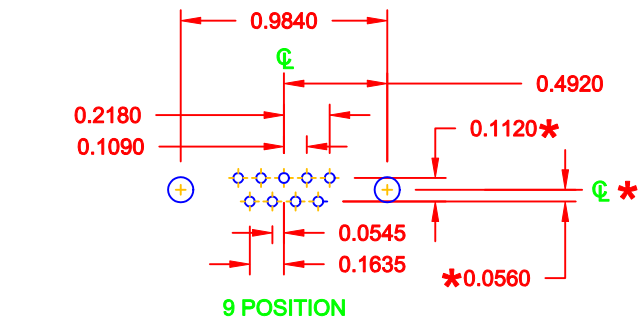

* TYP. ON ALL SIZES


DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 03-08-06		
		CHECKED:		DATE:		
		SCALE: FULL		SHEET 2 OF 3		REV 5
		DWG NO. 174-YYY-112RYY1				

HARDWARE OPTIONS

REPLACE -YY IN LAST 3 DIGITS WITH OPTION CHOSEN


173/174 SERIES

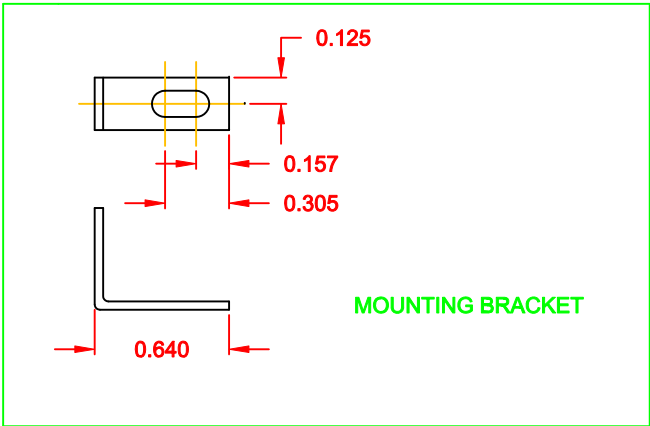

173 / 174 SERIES

14Y = SHORT BRACKET & 4-40 FEMALE HEX SOCKET
24Y = SHORT BRACKET & 4-40 SCREW

175/176 SERIES

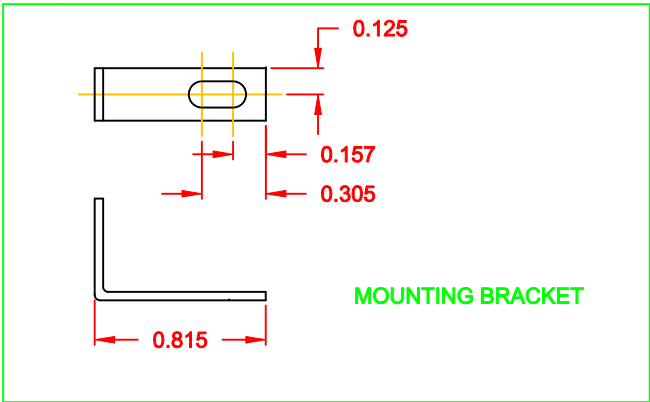

175 / 176 SERIES

15Y = LONG BRACKET & 4-40 FEMALE HEX SOCKET
25Y = SHORT BRACKET & 4-40 SCREW

MATERIAL: COLD ROLLED STEEL
PLATING: CLEAR ZINC

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 11-28-05	
		CHECKED:		DATE:	
NorComp	SCALE:		SHEET 3 OF 3		REV 5
	DWG NO. 174-YYY-112RYY1				