



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	GI	REVISED PER ECR-16-011494	21JUN2017	NK	CX

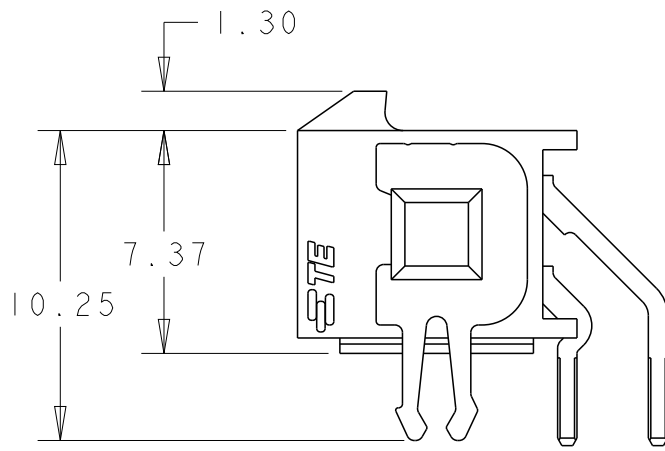

2 PLATING;
CONTACTS - 0.38 μ m MINIMUM GOLD OVER 2.54 μ m MINIMUM NICKEL
ON MATING AREA. 2.54 μ m TIN-LEAD MINIMUM OVER 2.54 μ m
NICKEL MINIMUM ON SOLDER TAILS.
HOLDDOWNS - 2.54 μ m TIN-LEAD MINIMUM OVER 2.54 μ m NICKEL

5 PLATING;
CONTACTS - 0.38μm MINIMUM GOLD OVER 2.54μm MINIMUM NICKEL
ON MATING AREA. 2.54μm MATTE TIN MINIMUM OVER 2.54μm
NICKEL MINIMUM ON SOLDER TAILS.
HOLDDOWNS - 2.54μm MATTE TIN MINIMUM OVER 2.54μm NICKEL

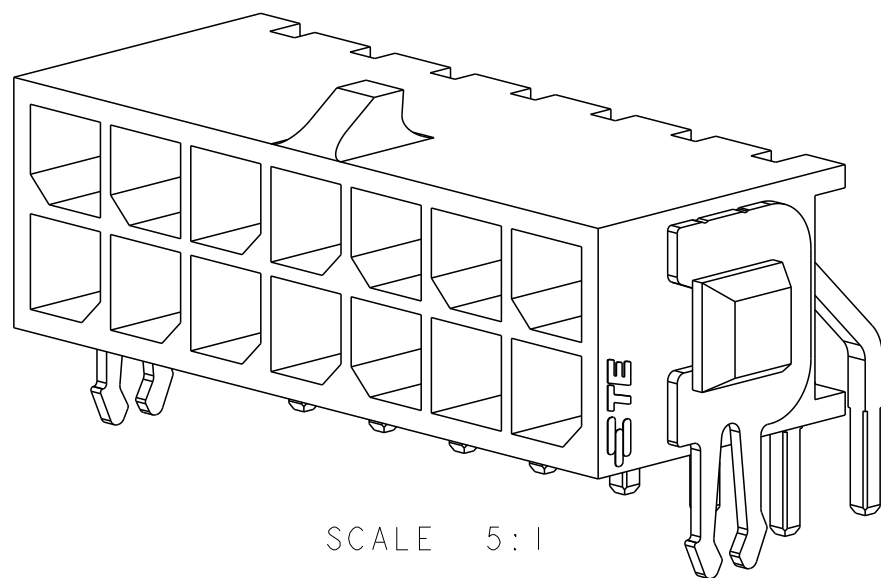

SCALE 5:1



	36.86	37.30	33.00	40.00	24	5-794678-4
	33.86	34.30	30.00	37.00	22	5-794678-2
	30.86	31.30	27.00	34.00	20	5-794678-0
	27.86	28.30	24.00	31.00	18	4-794678-8
	24.86	25.30	21.00	28.00	16	4-794678-6
	21.86	22.30	18.00	25.00	14	4-794678-4
	18.86	19.30	15.00	22.00	12	4-794678-2
	15.86	16.30	12.00	19.00	10	4-794678-0
	12.86	13.30	9.00	16.00	8	3-794678-8
	9.86	10.30	6.00	13.00	6	3-794678-6
	6.86	7.30	3.00	10.00	4	3-794678-4
	3.86	4.30	-	7.00	2	3-794678-2
	36.86	37.30	33.00	40.00	24	2-794678-4
	33.86	34.30	30.00	37.00	22	2-794678-2
	30.86	31.30	27.00	34.00	20	2-794678-0
	27.86	28.30	24.00	31.00	18	1-794678-8
	24.86	25.30	21.00	28.00	16	1-794678-6
	21.86	22.30	18.00	25.00	14	1-794678-4
	18.86	19.30	15.00	22.00	12	1-794678-2
	15.86	16.30	12.00	19.00	10	1-794678-0
	12.86	13.30	9.00	16.00	8	794678-8
	9.86	10.30	6.00	13.00	6	794678-6
	6.86	7.30	3.00	10.00	4	794678-4
	3.86	4.30	-	7.00	2	794678-2
FINISH	DIM Y	DIM W	DIM Z	DIM X	NO. OF POSN.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 12AUG99 CHK K. COBLE 12AUG99 APVD K. COBLE 12AUG99		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		NAME THRU-HOLE, RIGHT ANGLE, 15 GOLD HEADER, MECHANICAL BOARDLOCK, DUAL ROW, MICRO MATE MATE-N-LOK™			
		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A200779	GAGE CODE C-794678	DRAWING NO 	RESTRICTED TO -
MATERIAL 		SEE TABLE		CUSTOMER DRAWING			
				SCALE 4:1	SHEET 1	OF 1	REV G1