

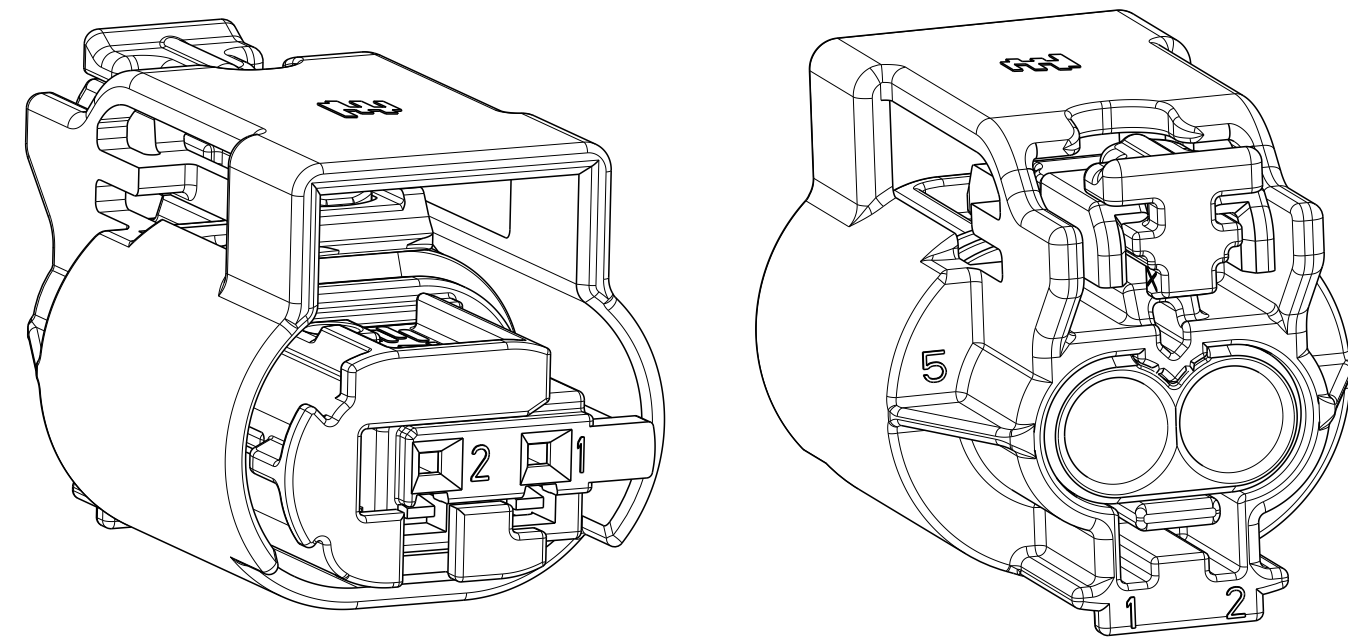


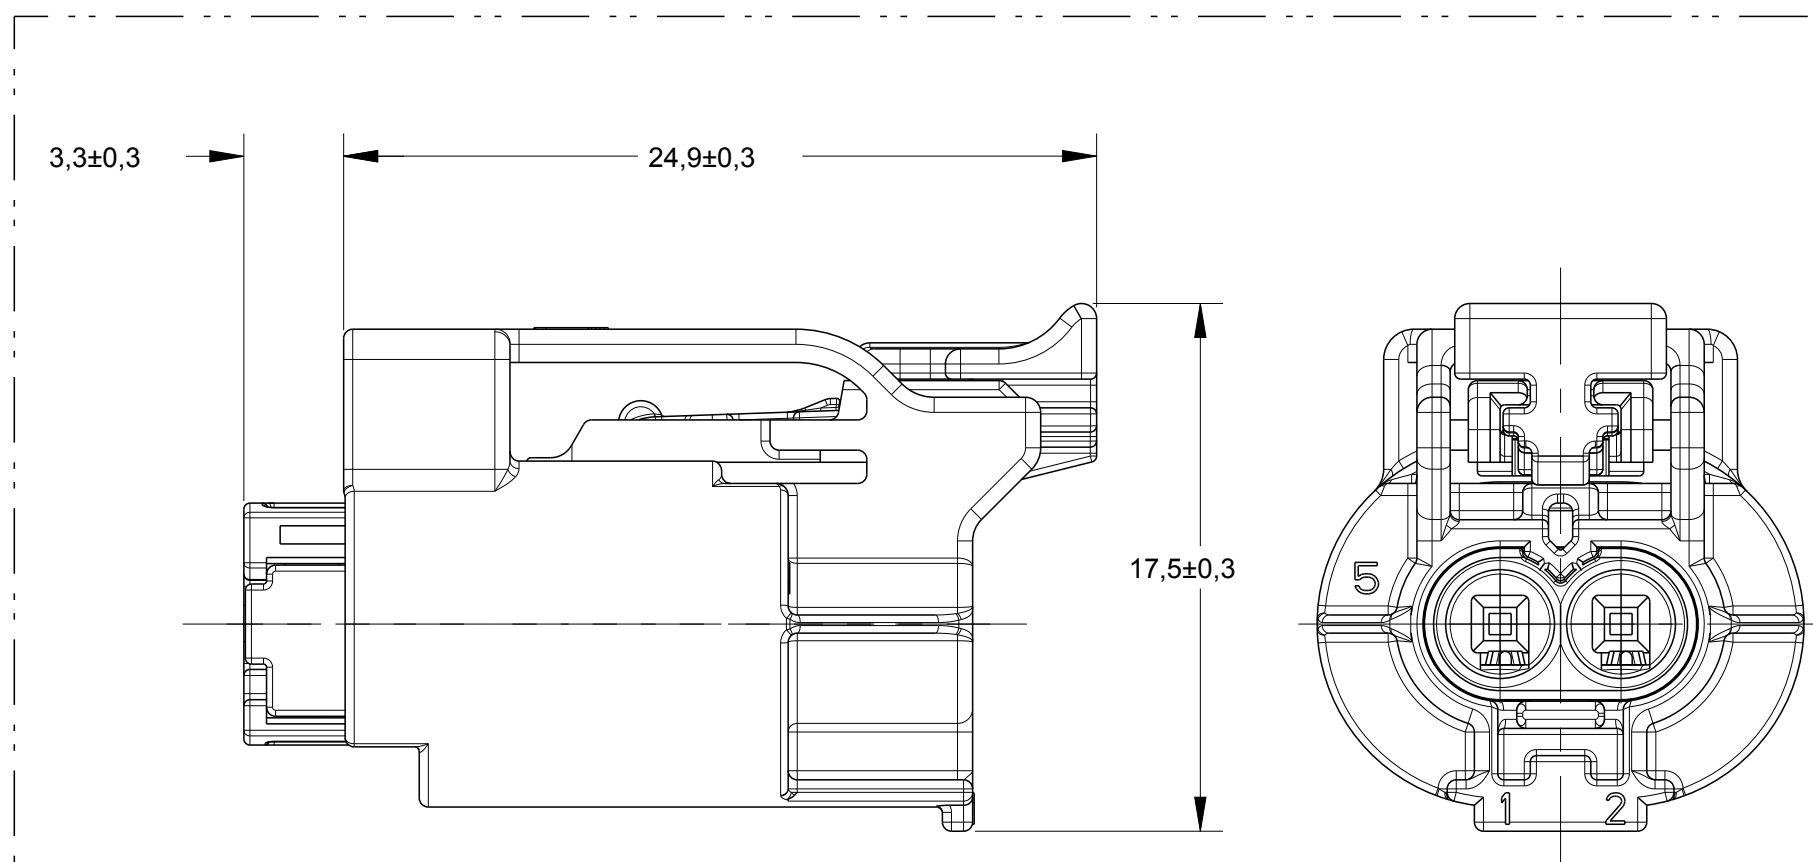


RECOMMENDED TERMINAL AND WIRE SEAL CHART 			
RECOMMENDED TERMINAL P/N  	PLATING	WIRE SIZE TYPE	RECOMMENDED WIRE SEAL  (CORRESPONDING TO WIRE SIZE AND TYPE)
1703032-5	GOLD	20AWG TXL	967067-1
1703032-1	TIN	20AWG TXL	967067-1
1703032-5	GOLD	18AWG TXL	967067-1
1703032-1	TIN	18AWG TXL	967067-1
1703032-5	GOLD	20AWG GXL	967067-1
1703032-1	TIN	20AWG GXL	967067-1
1703032-5	GOLD	0.75mm ²	967067-1
1703032-1	TIN	0.75mm ²	967067-1

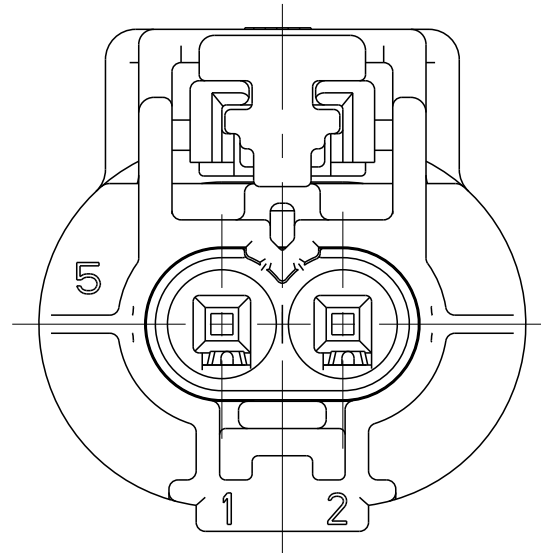

8 MATERIAL RECESS (SEE SHEET 2 OF 2).

12 - CONTACT PINS ACCORDING TO INTERFACE DRAWING TE 114-18063 (SEE SHEET 2 OF 2)

4805 (3/11)

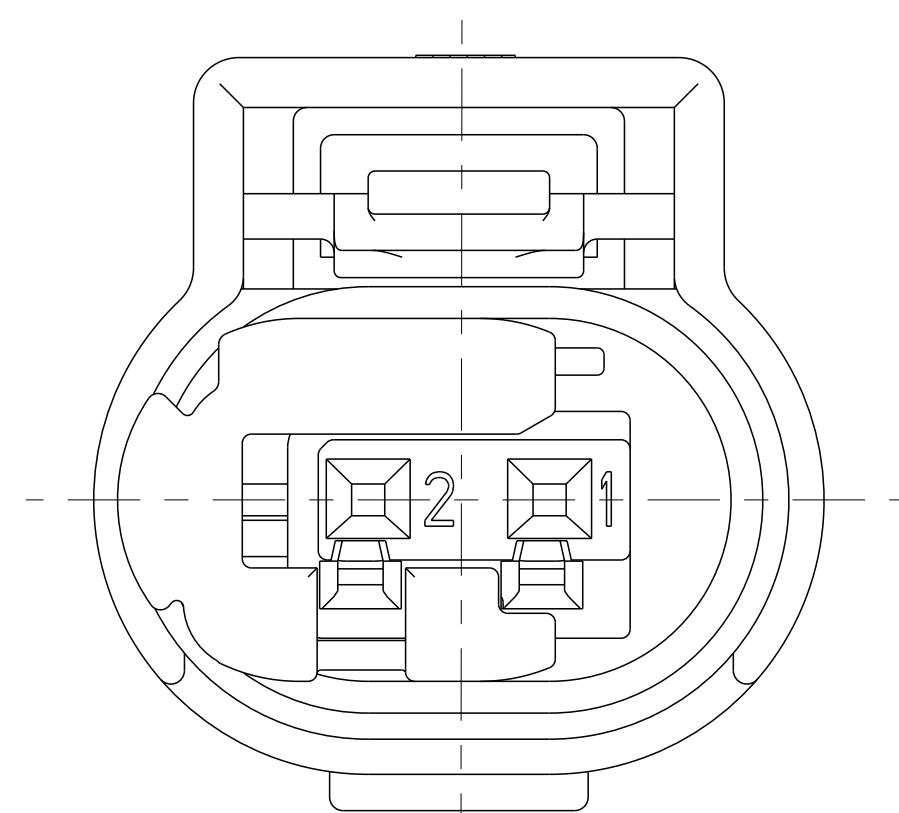

KEY CODE D 1:
1-1438708-4 AND 1-1438608-8 ONLY
SCALE 6:1


0,95⁰_{-0,10}

15


SECTION B-B

SECTION B-B

CODING "C"

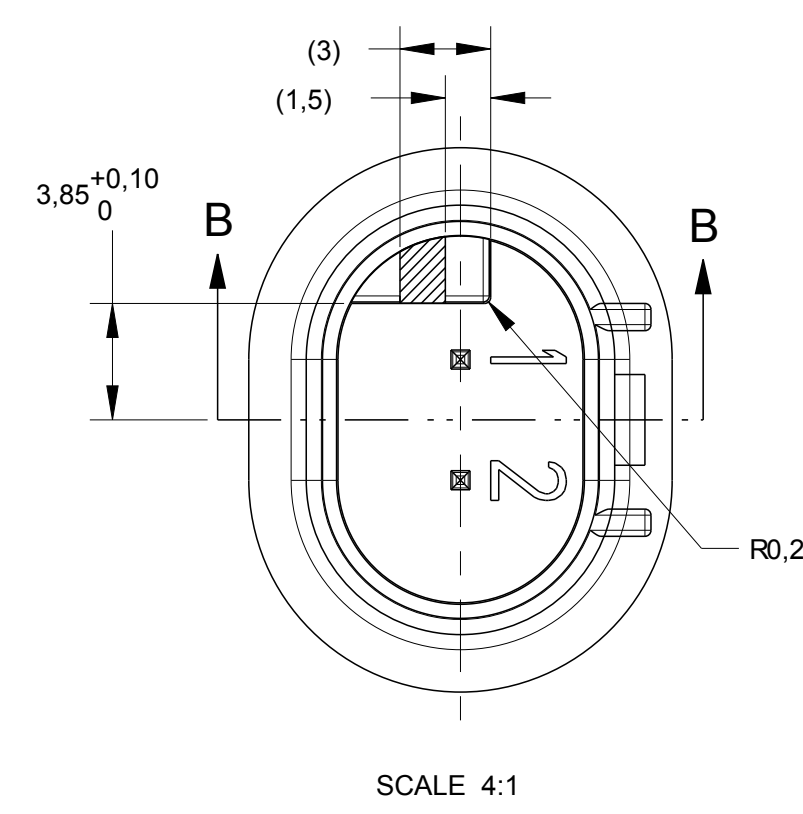

SCALE 4:1

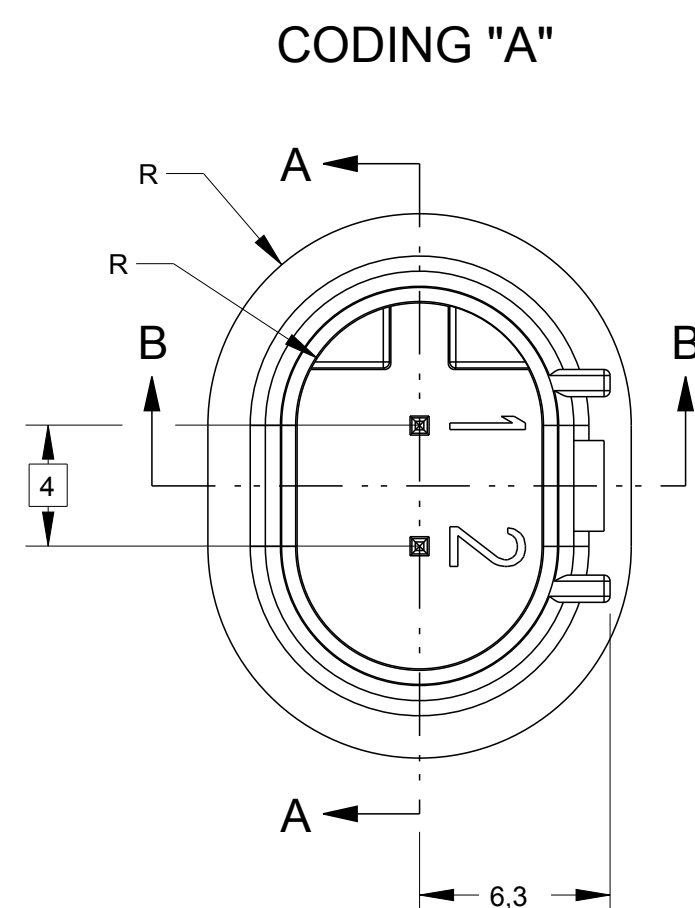

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.FOLTZ 28APR2004 CHK B.BUCHTER 28APR2004 APP'D B.BUCHTER 28APR2004		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PL/C ±.0 1 PL/C ±0.5 2 PL/C ±0.13 3 PL/C ±.3 4 PL/C ±.3 ANGLES ±.0°/30° FINISH		NAME PLUG ASSEMBLY, 2 POSITION, SEALED, MQS CLEAN BODY CONNECTOR -	
		PRODUCT SPEC 		SIZE A1	
MATERIAL SEE TABLE		APPLICATION SPEC 114-37012 WEIGHT		GAGE CODE 00779	
SEE TABLE		CUSTOMER DRAWING Customer Drawing		DRAWING NO C=1438608	
				SCALE 4:1	
				SHEET 2 OF 2	
				REV G	