

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

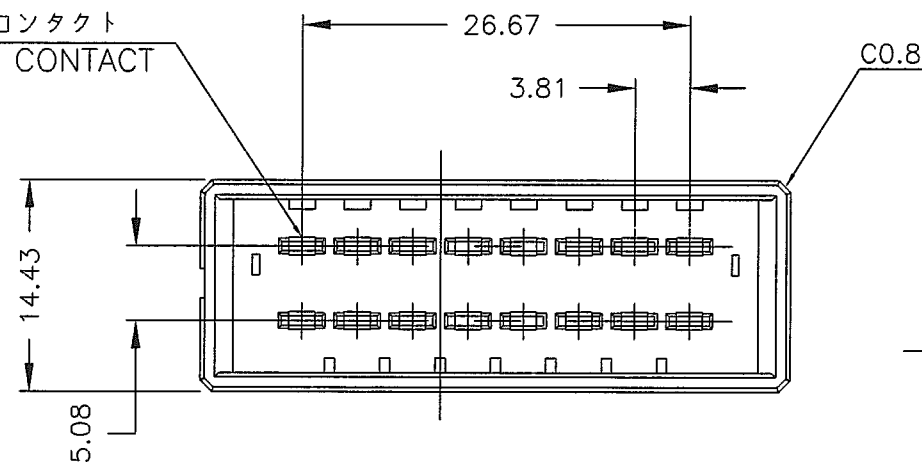
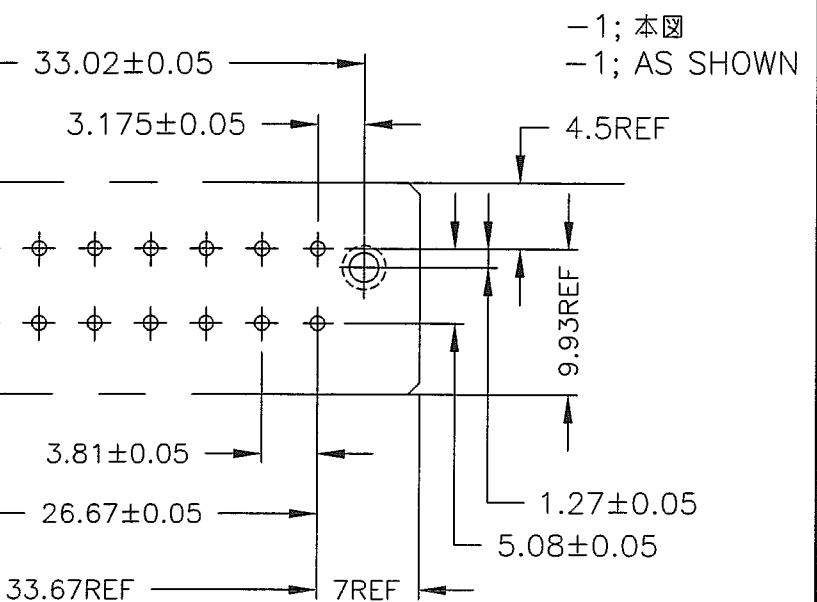
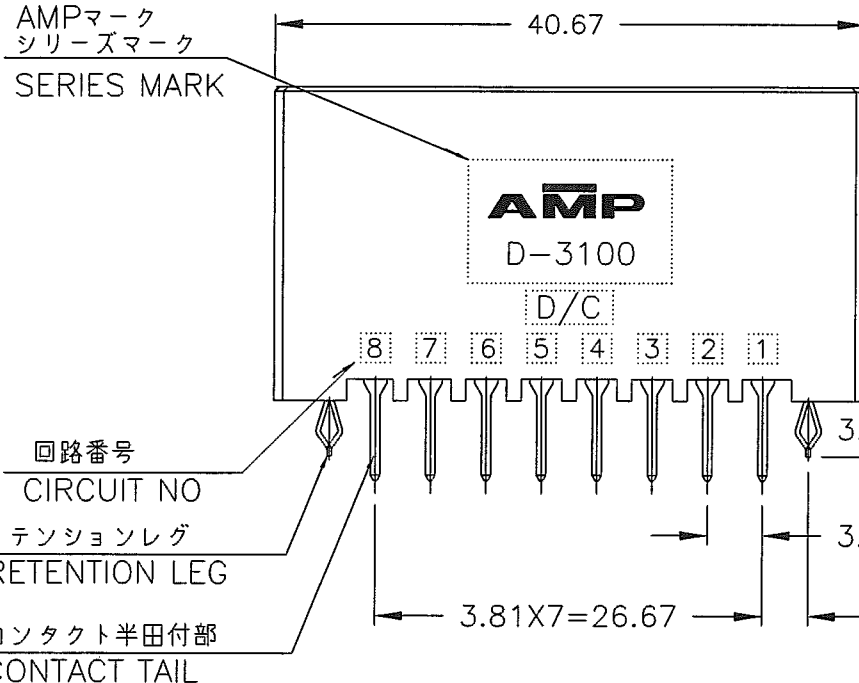
RELEASED FOR PUBLICATION

29JUN2001,29JUN2001

© COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			DATE	DWN	APVD
		P	LTR	DESCRIPTION			
J	—	A		RELEASED	08JUL05	C.O	T.K

タブコンタクト
TAB CONTACTコネクタ外形
OUTLINE OF HEADER HOUSINGスルーホール 2-φ2±0.1
DIA2±0.1 2PLACESラウンド 2-φ3MIN
ROUND DIA 3MIN 2PLACES20-φ1.1±0.1
DIA 1.1±0.1 20PLACESAMPマーク
シリーズマーク
SERIES MARK推奨基板取付け穴寸法
(非累積公差)
(コネクタ搭載面)RECOMEND PC BOARD HOLE PATTERN
(NOT ACCUMULATE TOLERANCE)
(CONNECTOR MOUNT SIDE)回路番号
CIRCUIT NOリテンションレグ
RETENTION LEGコンタクト半田付部
CONTACT TAIL

- ① MATERIAL:HOUSING:GLASS FILED THERMO PLASTIC POLYESTER COLOR, BLACK
CONTACT: COPPER ALLOY
RETENTION LEG: COPPER ALLOY
- ② FINISH(CONTACT); ALL OVER Ni UNDERPLATED
CONTACT AREA: 0.76μmMIN GOLD PLATED
TINE AREA: TIN PLATED
- ③ FINISH(RETENTION LEG);
TIN PLATED OVER NICKEL

- ① 材料;ハウジング: ガラス入り熱可塑性
ポリエステル樹脂 色; 黒色
コンタクト: 銅合金
リテンションレグ: 銅合金
- ② めっき(コンタクト); 全面Ni下地
接点部: 0.76μmMIN.金めっき
半田付け部: 錫めっき
- ③ めっき(リテンションレグ);
ニッケル下地上に錫めっき

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 概
mmMATERIAL
材料

①

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0-PLC	±	10以下: ±0.3
1-PLC	±	10% 最大 30以下: ±0.4
2-PLC	±	30% 最大 100以下: ±0.5
3-PLC	±	
4-PLC	±	
ANGLES	±	±3°

FINISH
仕上

②③

DWN C.OHASHI 08JUL2005

CHK T.KIMURA 08JUL2005

APVD T.KIMURA 08JUL2005

PRODUCT SPEC

製品規格

108-5349

APPLICATION SPEC

取付適用規格

114-5148

WEIGHT 8.8 g

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics AMP K.K.
Kawasaki, JapanNAME
名称16POS DOUBLE ROW
VERTICAL HDR ASSEMBLY
FOR DYNAMIC D-3100

SIZE

A3

CAGE CODE

00779

DRAWING NO

番号

C-1871794

RESTRICTED TO

—

SCALE 1:1

SHEET 1 OF 1

REV A