

REV. 0


DCO 15679

| | |
|-----------------|----------------|
| COIL: @ +25 °C | |
| RESISTANCE | 700 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.5 VDC |
| MUST RELEASE | 15 VDC |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 20 g's |
| SHOCK | 100 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

| | |
|--------|------------------|
| NOTES: | OPERATE 4 MS MAX |
| | RELEASE 2 MS MAX |
| | BOUNCE 3 MS MAX |

CUSTOMER DATA SHEET

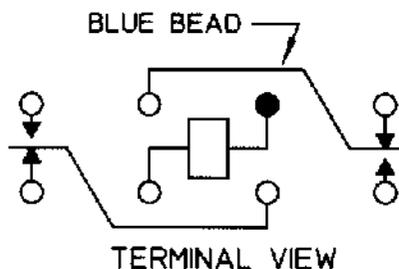

| | |
|--------------------|-----------------------|
| CONTACT RATING: | 2A 30 VDC |
| RESISTIVE | .75A 30 VDC INDUCTIVE |
| 100,000 OPERATIONS | |

DR. B.D. 6/1/99 CK. GQH 6-1-99

COMMUNICATIONS INSTRUMENTS, INC.

| | |
|---------------------|------------------|
| CUST. HI-G | TYPE "HFW" RELAY |
| CUST. NO. 2K-4A-126 | |

HFW1501S26