


LOC	DIST	REVISIONS					
		REV	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53	AD3	REVISED	PER ECR-17-008392	23JUN2017	BW	KR

D


C

B


A

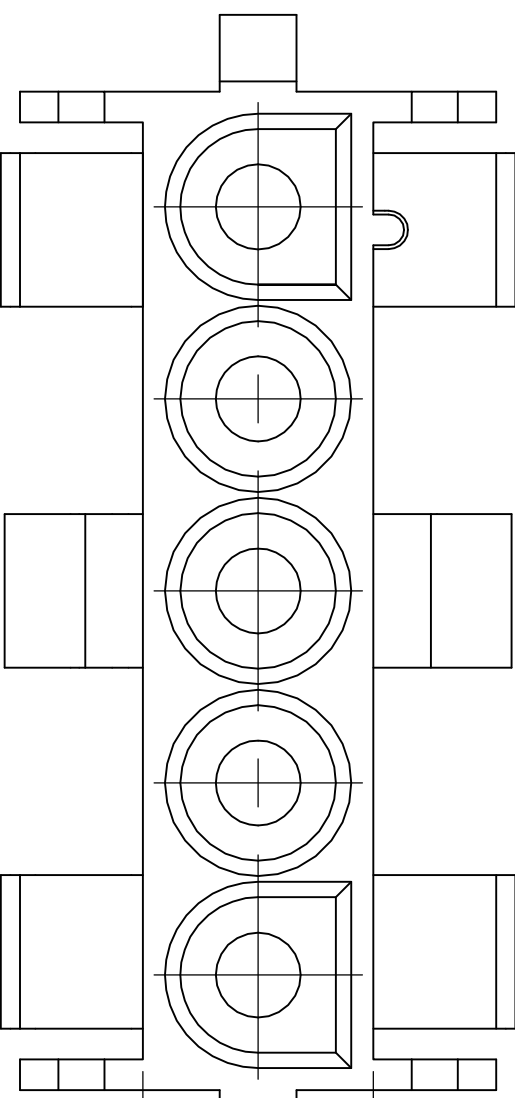


7.62

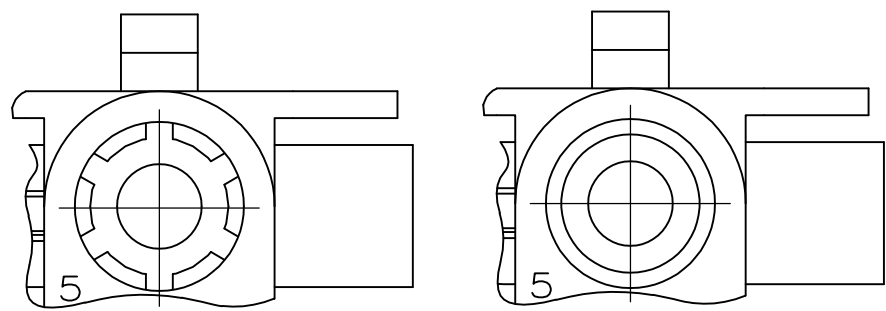

DETAIL E
OPTIONAL CONSTRUCTION

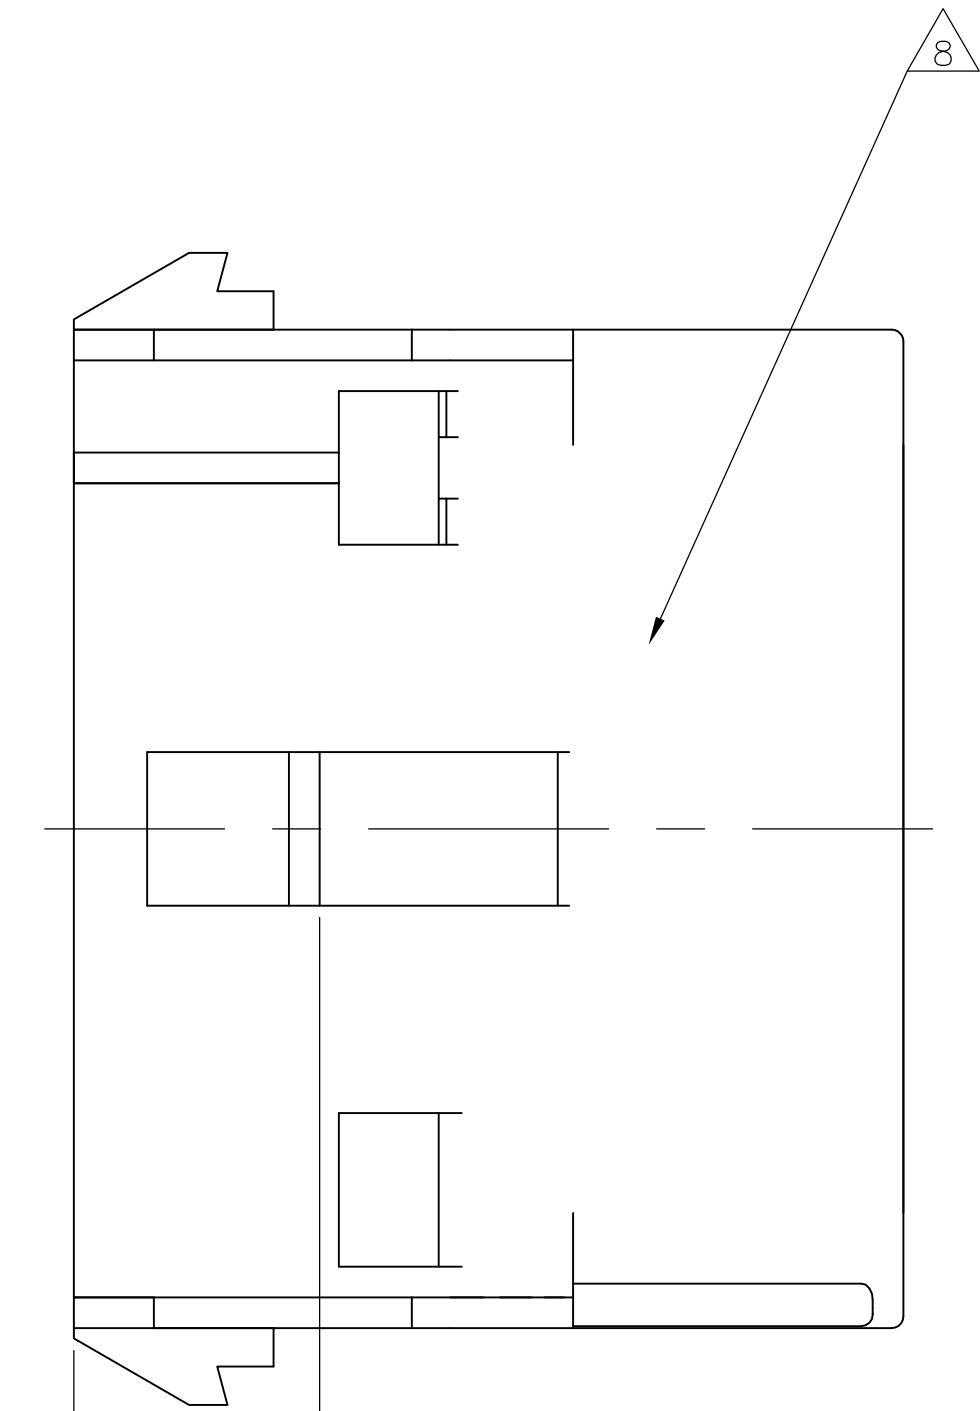


8.13±0.25

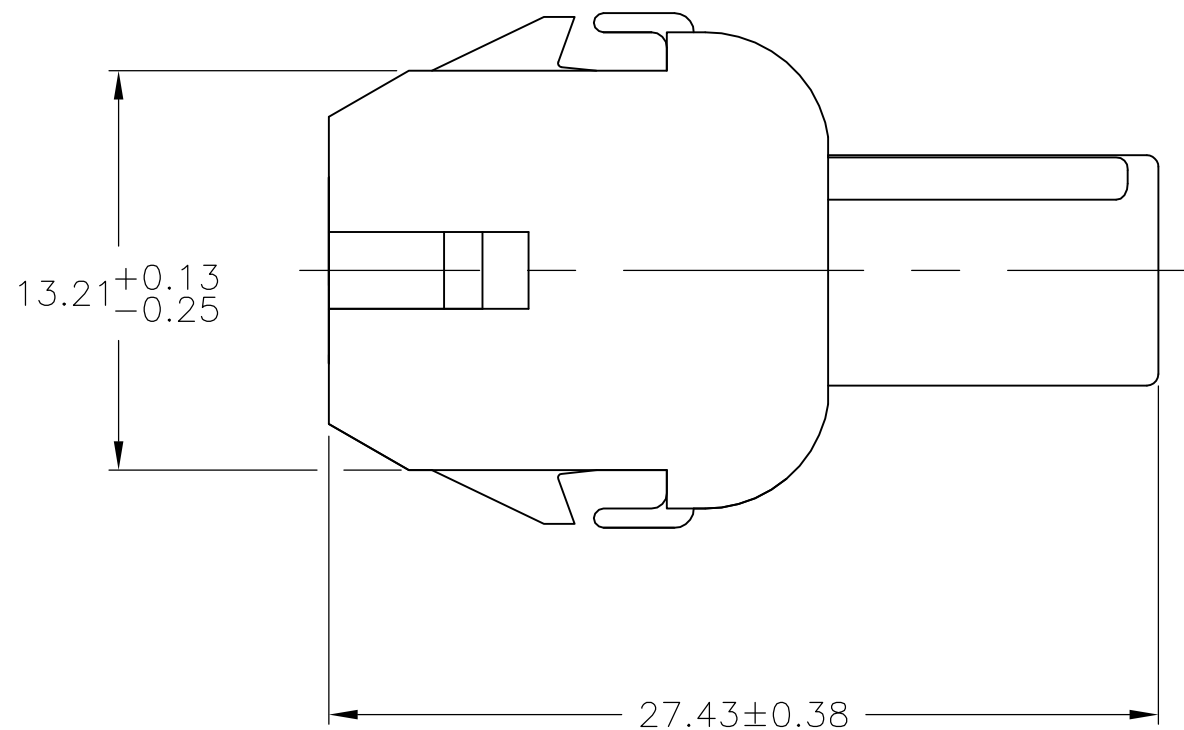


13.21+0.13/-0.25

27.43±0.38

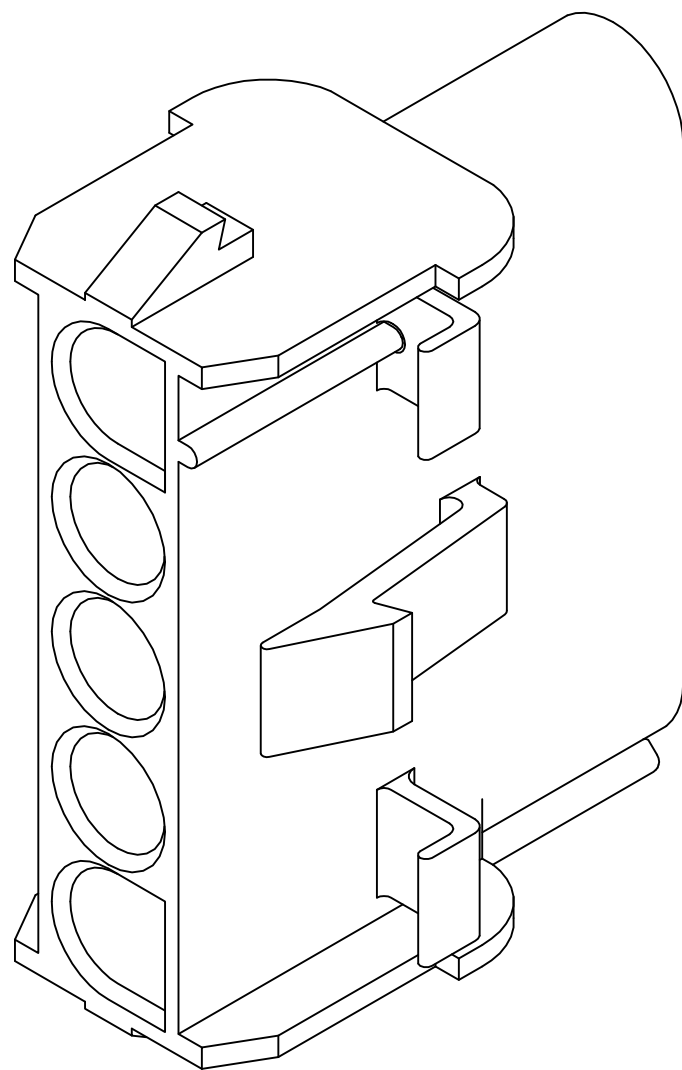


3-DIMENSIONAL MODEL
NTS

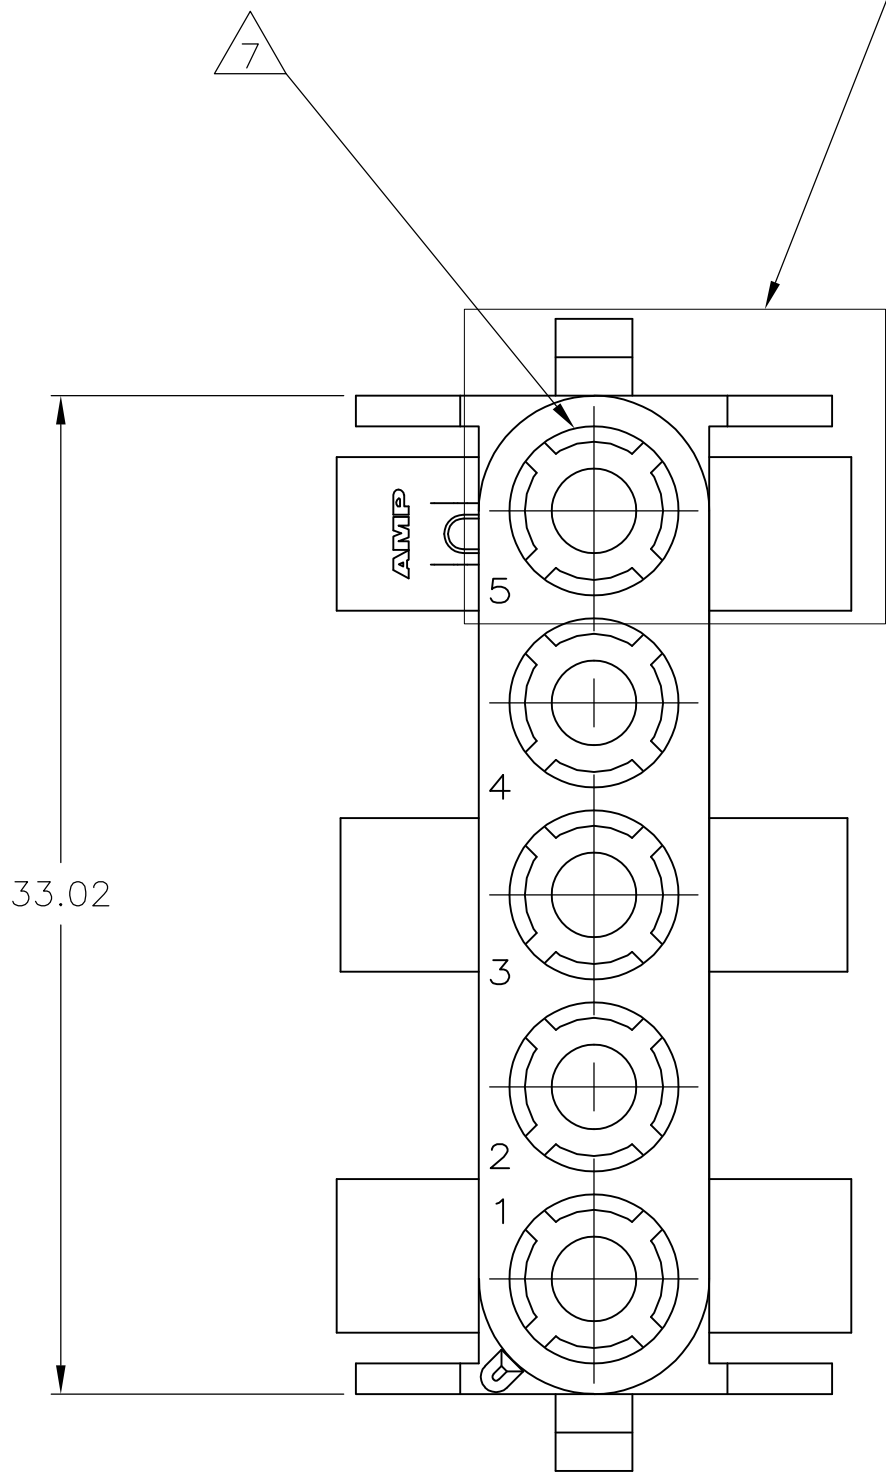

33.02

SEE DETAIL A

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NUMBER 1 LOCATION.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

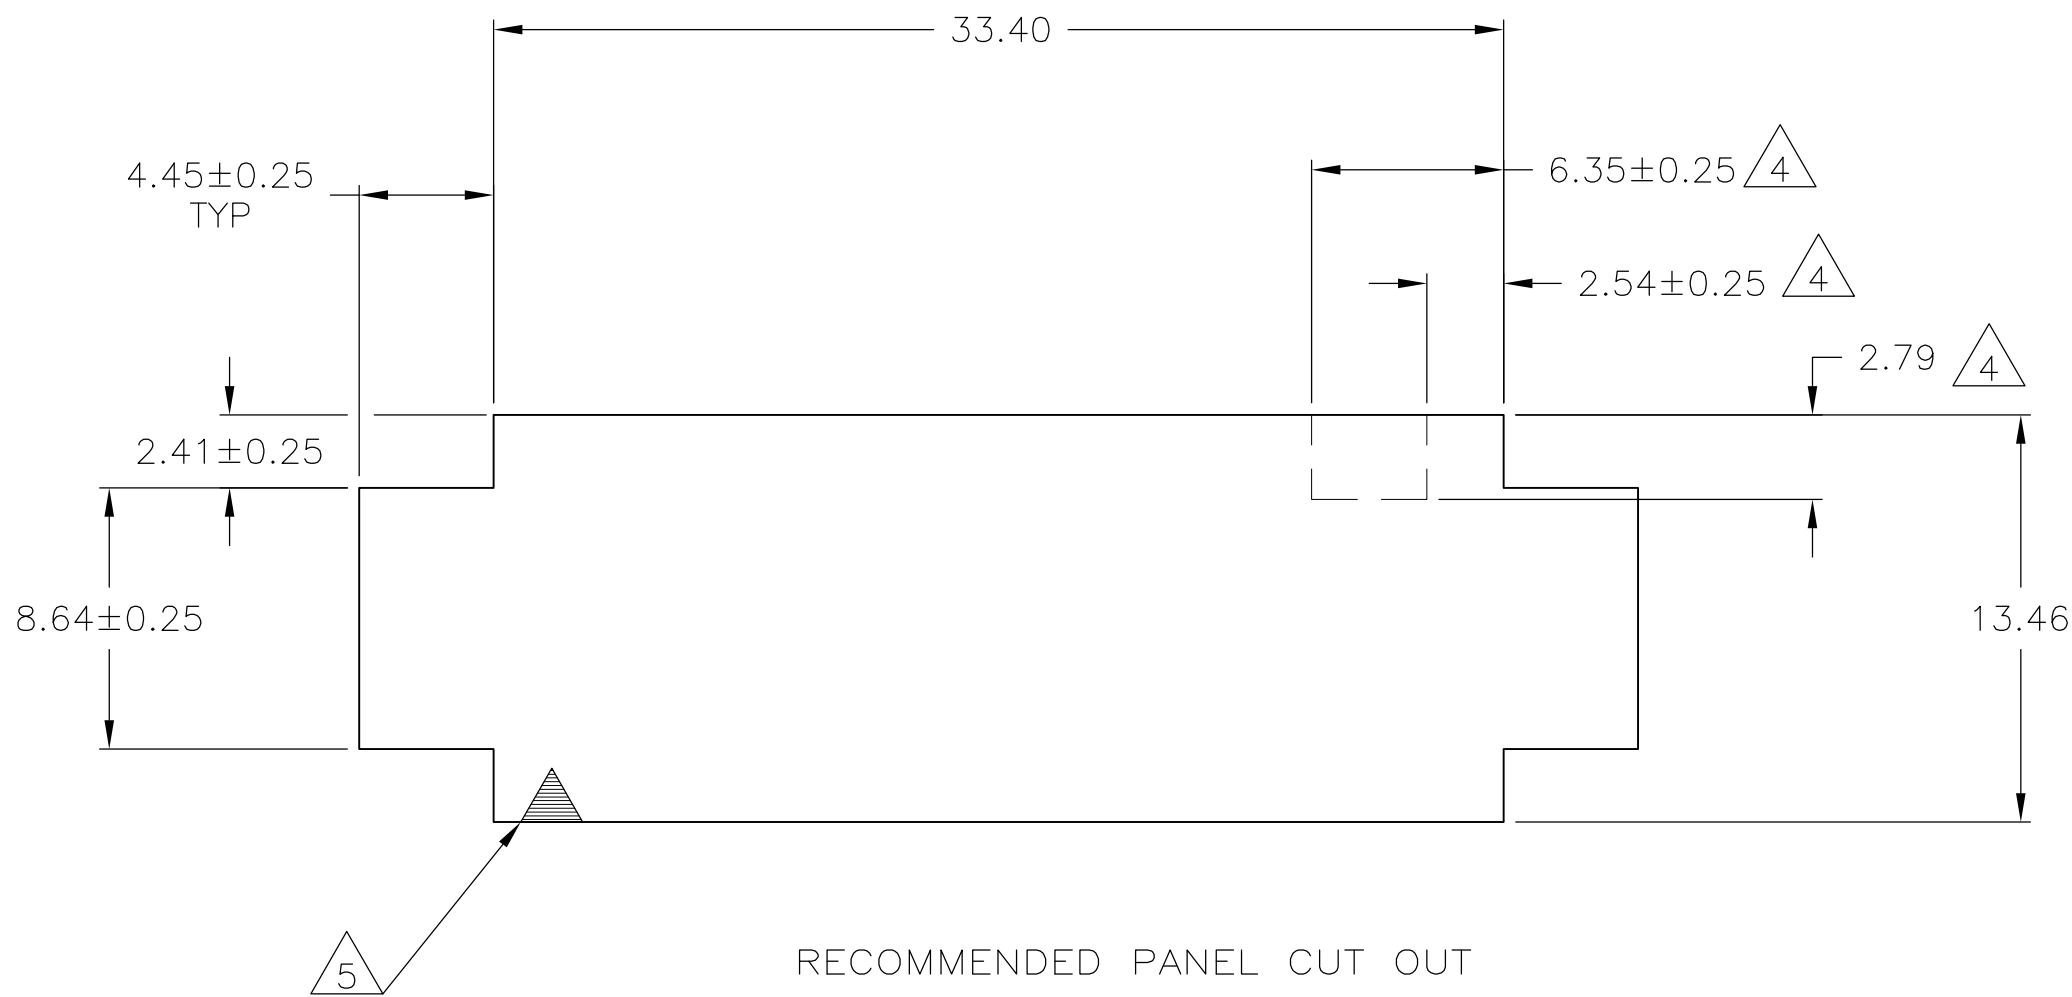

RECOMMENDED PANEL CUT OUT

4.45	.175	33.40	1.315
2.79	.110	33.02	1.300
2.54	.100	27.43	1.080
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN

CONVERSION TABLE

9 OBSOLETE	BLACK	480764-9
	GRAY	480764-8
	BLUE	480764-6
	GREEN	480764-5
	YELLOW	480764-4
9 OBSOLETE	ORANGE	480764-3
	RED	480764-2
	BROWN	480764-1
	NATURAL	1-480764-0
	COLOR	PART NO

STE TE Connectivity

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 07JUN92	NAME CAP.5 CIRCUIT, UNIVERSAL MATE-N-LOK™	
DIMENSIONS: mm		CHK R. SWING 07JUN92		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. SELF 08JUN92	SIZE CAGE CODE DRAWING NO	
	0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES ± 1°	PRODUCT SPEC APPLICATION SPEC	RESTRICTED TO	
MATERIAL NYLON,UL 94V-2		FINISH -	WEIGHT	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV AD3