

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

REVISIONS


© COPYRIGHT

ALL RIGHTS RESERVED.


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------------------|-----------|-----|------|
| | B | REVISED (ECR-06-030161) | 28/MAY/07 | DH | JK |
| | B1 | REVISED (ECR-18-014392) | 11/SEP/18 | YH | YJ |

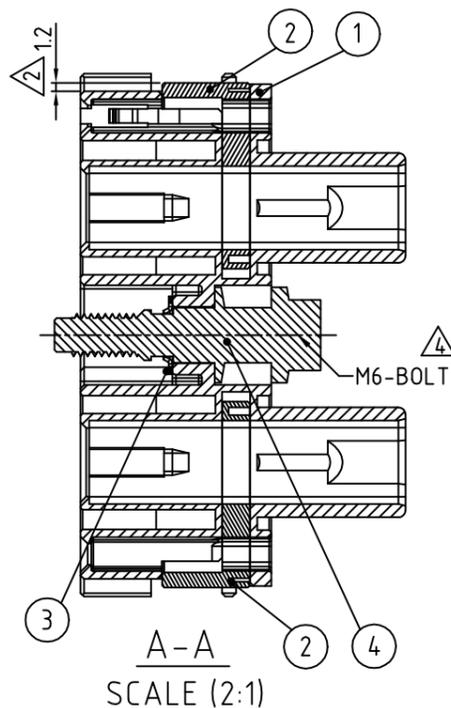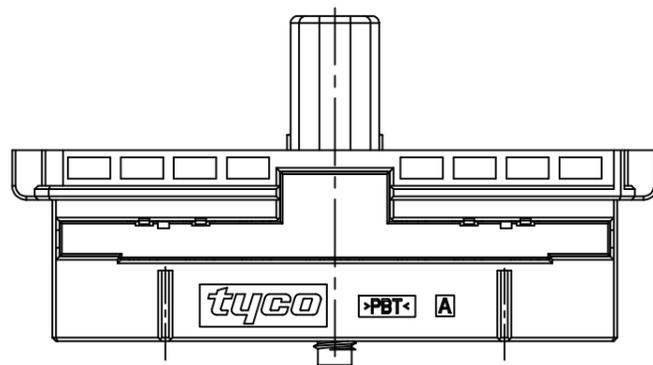

60P HYBRIDE PLUG KEY CODE.



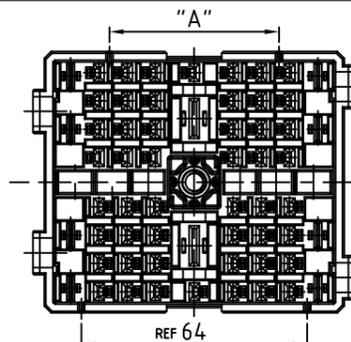


| P/N | "A" | COLOR | MATERIAL |
|---------------|-----|-------|----------|
| 0-1743134-2 | 56 | BLACK | PBT |
| 1,2-1743134-3 | 48 | GRAY | PBT |

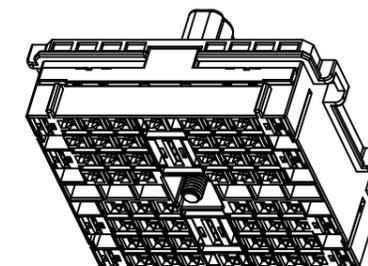

SCALE 1:2

NOTE:
 1. GENERAL TOLERANCE IS $\pm 0.3, \pm 3^\circ$
 \triangle CONDITION OF DELIVERY : DBL PLATE PRE-ASSEMBLED POSITION
 3. APPLIED RECEPTACLE CONTACT P/N:

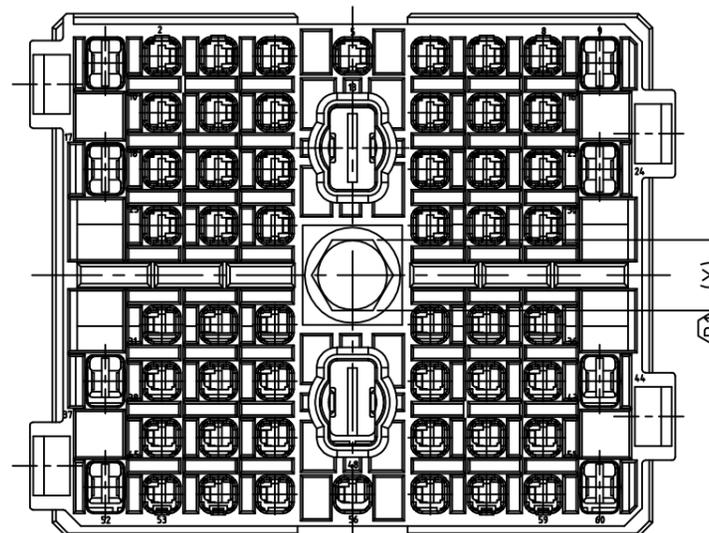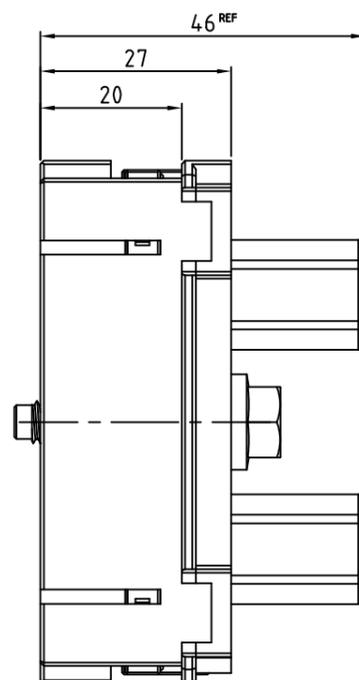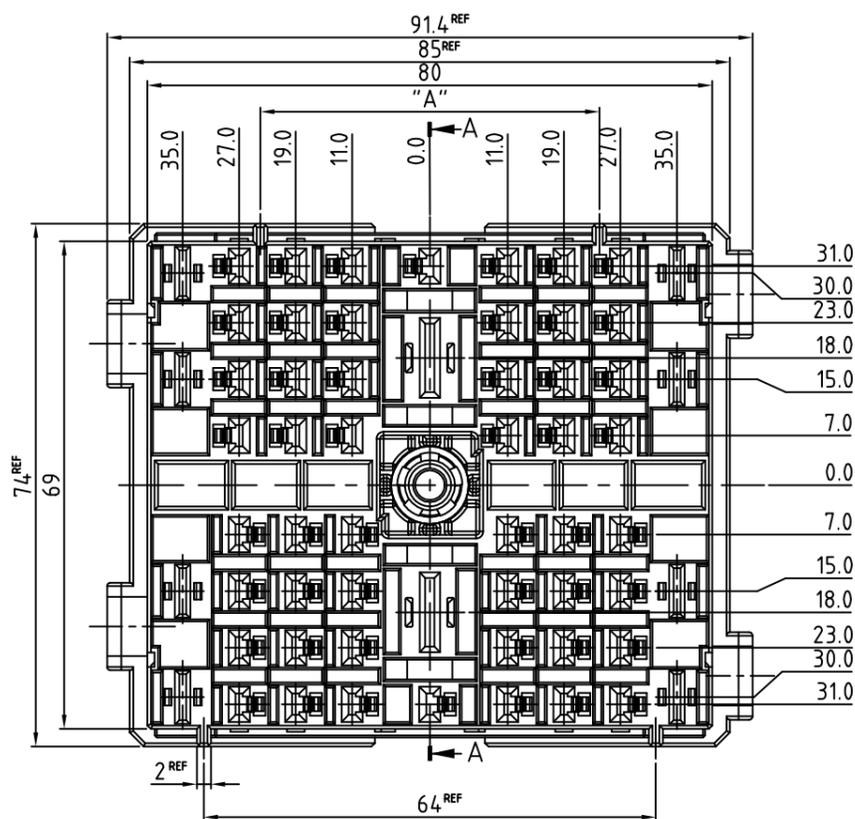

| | PART No. | WIRE SIZE(mm) |
|---------|-------------|--------------------------|
| MCP-E | 0-1743162-1 | 0.3_0.85mm ² |
| | 0-1743163-1 | 1.25_2.0mm ² |
| MCP 6.3 | 0-1241400-1 | 0.2_0.5mm ² |
| | 0-1241402-1 | 0.5_1.0mm ² |
| | 0-1241404-1 | 1.0_2.5mm ² |
| | 0-1241406-1 | 2.5_4.0mm ² |
| MCP 9.5 | 0-1241408-1 | 4.0_6.0mm ² |
| | 1-967588-1 | 6.0_10.0mm ² |
| | 1-967589-1 | 10.0_16.0mm ² |

\triangle Torque spec 0.8-1.0 Kgf.m

| | | | | ASSY P/N | | |
|------|---------------|-----|---------|---------------|-------------|-------------|
| | | | | 2-1743134-3 | 1-1743134-3 | 0-1743134-2 |
| 4 | M6 BOLT(8mm) | 8 | - | SWCH10A | 1 | • |
| | M6 BOLT(10mm) | 10 | - | SWCH10A | • | 1 1 |
| 3 | PUSH NUT(NEW) | - | - | SUS 304(3/4H) | 1 | 1 1 |
| 2 | DBL | - | NATURAL | PBT | 2 | 2 2 |
| 1 | PLUG | - | GRAY | PBT | 1 | 1 • |
| | | - | BLACK | PBT | • | • 1 |
| NAME | | "X" | COLOR | MATERIAL | Q'TY | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | |
|-------------------|---|
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| | 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± |
| MATERIAL | FINISH |
| SEE TABLE | |

| | |
|------------------|---------------|
| DWN YH MA | NAME |
| CHK YH MA | |
| APVD YJ YOUN | SIZE |
| PRODUCT SPEC | |
| APPLICATION SPEC | CAGE CODE |
| WEIGHT | DRAWING NO |
| CUSTOMER DRAWING | RESTRICTED TO |

TE TE Connectivity
 HYBRID 60P PLUG ASS'Y
 (BOLT TYPE)

| | | | | | | |
|----|-------|----|---------|-----------|--------------|--------|
| A3 | 00779 | C= | 1743134 | SCALE 1/1 | SHEET 1 OF 1 | REV B1 |
|----|-------|----|---------|-----------|--------------|--------|