


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1715757138](#)
Status: **Active**
Overview: [Impact™ Backplane Connectors and Cable Assemblies](#)
Description: [Impact™ 100 Ohm 5-Pair Right-Angle Orthogonal Direct Header, Top Guided, with Outtrigger, 10 Column, 50 Differential Pair, 270#Mate Position, Pin Length 5.50mm, Plated Through-Hole Dimension 0.39mm, Lead Free](#)

Documents:
[Drawing \(PDF\)](#)
[Product Specification PS-45499-002 \(PDF\)](#)
[Product Specification PS-76060-999 \(PDF\)](#)
[Application Specification AS-76060-9999 \(PDF\)](#)
[Application Specification AS-76850-990 \(PDF\)](#)
[Packaging Specification PK-70873-8022 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	171575
Application	Orthogonal Direct
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
Style	N/A
UPC	887191727110
Physical	
Circuits (Loaded)	150
Circuits (maximum)	150
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	32.565/g
Number of Columns	10
Number of Pairs	5
Number of Rows	15
Orientation	Right Angle
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

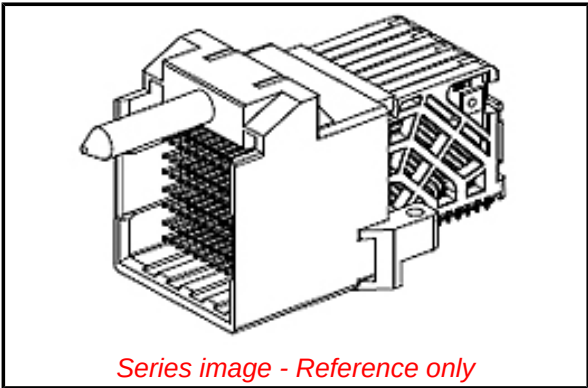

EU ELV
Not Relevant

EU RoHS
Compliant
REACH SVHC
Not Contained Per
-ED/79/2015 (17
December 2015)
Halogen-Free
Status
Not Low-Halogen
Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image
ELV Not Relevant

Search Parts in this Series
[171575](#) Series

Mates With
[76990](#) Impact™ 100 Ohm Right Angle Orthogonal Daughtercard

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-9999, AS-76850-990
Packaging Specification	PK-70873-8022
Product Specification	PS-45499-002, PS-76060-999
Sales Drawing	SD-171575-0002

This document was generated on 06/10/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION