

THIS DRAWING IS UNPUBLISHED.
QUESTA DISEGNO NON E' PUBBLICATO
© COPYRIGHT — By —

RELEASED FOR PUBLICATION
RILASCIATO PER PUBBLICAZIONE
ALL RIGHTS RESERVED.
TODOS LOS DERECHOS RESERVADOS.
TODOS LOS DERECHOS RESERVADOS.
TODOS LOS DERECHOS RESERVADOS.



LOC	DIST	REVISIONS				
FT	0	P	LTR	DESCRIPTION		DATE
		REV	REV	MODIFICATIONS		FILE
			F	REVISED PER ECO-11-023401		01DEC11
						DWN
						APVD
						MS

MATERIAL:
HOUSING: THERMOPLASTIC, UL94V-0, BLACK.
TERMINAL: BRIGHT TIN PLATED, COPPER ALLOY.
M3 SCREWS: ZINC PLATED STEEL.


ELECTRICAL:
RATED CURRENT: 10A.
OPERATING VOLTAGE: 300V.
WIRE RANGE: 16-30 AWG.

MECHANICAL:
PITCH (TERMINAL SPACING): .250"
OPERATING TEMP.: 120°C MAX.



- 1 SEE FIGURE.
- 2 M3 SCREWS BOTTOMED.
- 3 RECOMMENDED PCB HOLE DIAMETER: .090".
- 4 PRELIMINARY PART NUMBER.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

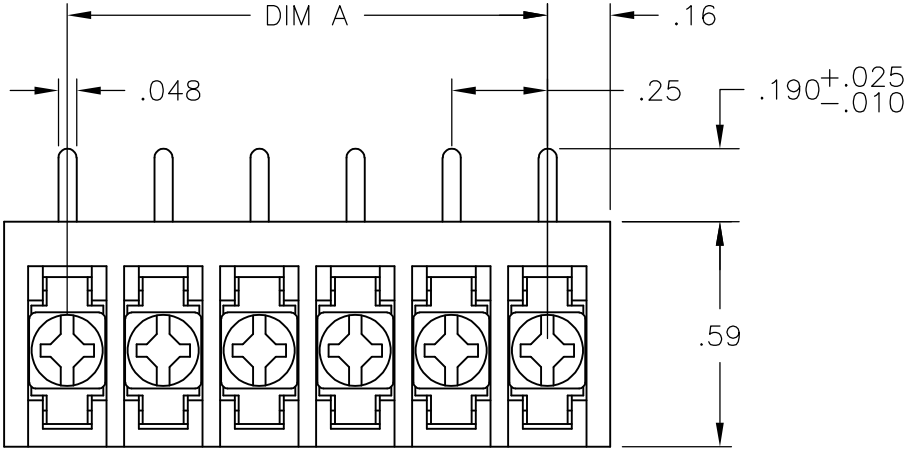

1-1546119-4

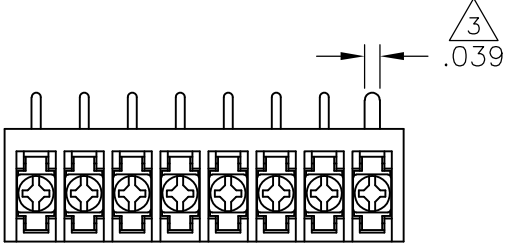

3-1546099-2

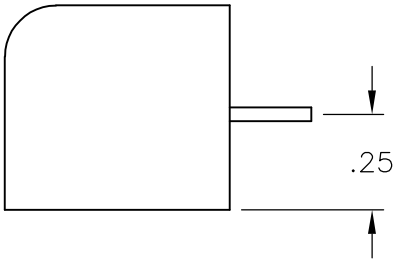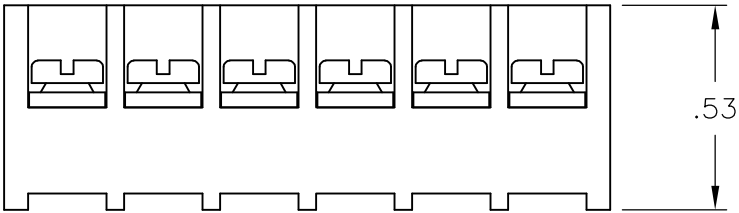


5 1 OBSOLETE

4 1

5 2 OBSOLETE

7.25	30	3PCR-30-006	3-1546099-0
7.00	29	3PCR-29-006	2-1546099-9
6.75	28	3PCR-28-006	2-1546099-8
6.50	27	3PCR-27-006	2-1546099-7
6.25	26	3PCR-26-006	2-1546099-6
6.00	25	3PCR-25-006	2-1546099-5
5.75	24	3PCR-24-006	2-1546099-4
5.50	23	3PCR-23-006	2-1546099-3
5.25	22	3PCR-22-006	2-1546099-2
5.00	21	3PCR-21-006	2-1546099-1
4.75	20	3PCR-20-006	2-1546119-0
4.50	19	3PCR-19-006	1-1546119-9
4.25	18	3PCR-18-006	1-1546099-8
4.00	17	3PCR-17-006	1-1546099-7
3.75	16	3PCR-16-006	1-1546099-6
3.50	15	3PCR-15-006	1-1546099-5
3.25	14	3PCR-14-006	1-1546099-4
3.00	13	3PCR-13-006	1-1546099-3
2.75	12	3PCR-12-006	1-1546119-7
2.50	11	3PCR-11-006	1-1546119-6
2.25	10	3PCR-10-006	1-1546119-5
2.00	9	3PCR-09-256	1-1546119-4
2.00	9	3PCR-09-006	1-1546119-3
1.75	8	3PCR-08-310	3-1546099-2
1.75	8	3PCR-08-006	1-1546119-2
1.50	7	3PCR-07-006	1-1546119-0
1.25	6	3PCR-06-302	3-1546099-1
1.25	6	3PCR-06-006	1-1437646-2
1.00	5	3PCR-05-006	1437646-9
.75	4	3PCR-04-006	1546119-8
.50	3	3PCR-03-006	1546099-1
.25	2	3PCR-02-006	1546119-5
DIM "A"	NO OF POS	CATALOG NUMBER	TE PART NO.

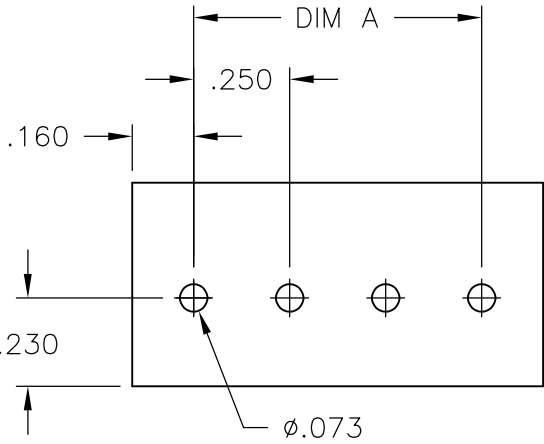

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT. QUESTA DISEGNO E' UN DOCUMENTO CONTROLLATO.		DWN/DISEGNO S. SCHLEGEL 4/22/03	TE Connectivity			
USE DIMENSIONS UNLESS OTHERWISE SPECIFIED. USARE DIMENSIONI A MENO CHE ALTRIMENTI SIA SPECIFICATO.		CHK/CONTROLLATO S. YODER 6/18/02	NAME DISEGNO			
DIMENSIONS: MILLIMETERS / INCHES		APVD/APPROVATO S. YODER 6/18/02	3PCR-XX-006 ASSEMBLY			
TOLERANCES UNLESS OTHERWISE SPECIFIED: TOLLERANZE A MENO CHE ALTRIMENTI SIA SPECIFICATO: 0 PLC / DEC: ± — 1 PLC / DEC: ± — 2 PLC / DEC: ± .02 3 PLC / DEC: ± .010 4 PLC / DEC: ± — ANGLES / ANGOLI: ± —		PRODUCT SPEC SPECIFICAZIONE PRODOTTO —	SIZE A3			
MATERIAL MATERIALE —		APPLICATION SPEC SPECIFICAZIONE APPLICAZIONE —	CAGE CODE 00779			
FINISH/OBERFLAECHE/FARBE ACABAMENTO —		WEIGHT PESO APPROX. —	DRAWING NO. C-1437646-9			
CUSTOMER DRAWING / DISEGNO CLIENTE		SCALE SCALA AS SHOWN / COME RAPPRESENTATO	SHEET 1 OF 1			
			REV F			