




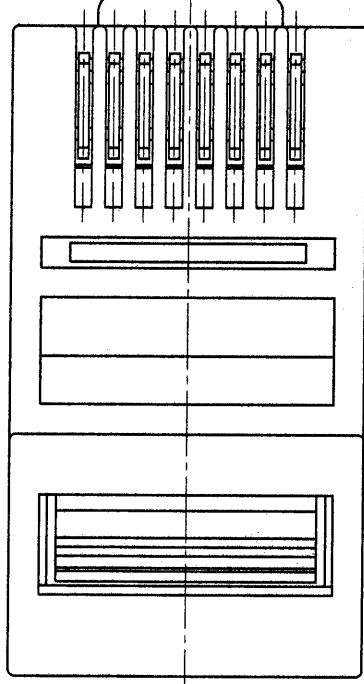


TABLE-1

APPLICABLE CABLE			
*THE CABLE SHOWN IN THE FIGURE LEFT IS ONE OF THE SAMPLE.			
*OUTER DIAMETER OF VINYL-JACKET CHANGES ACCORDING TO ITS HARNESS SO THE DIMENSION IN THE FIGURE FOR REFERENCE.			
CONDUCTOR	INSULATOR (OUTER DIAMETER φ0.9±1mm)	VINYL JACKET	(φ5)

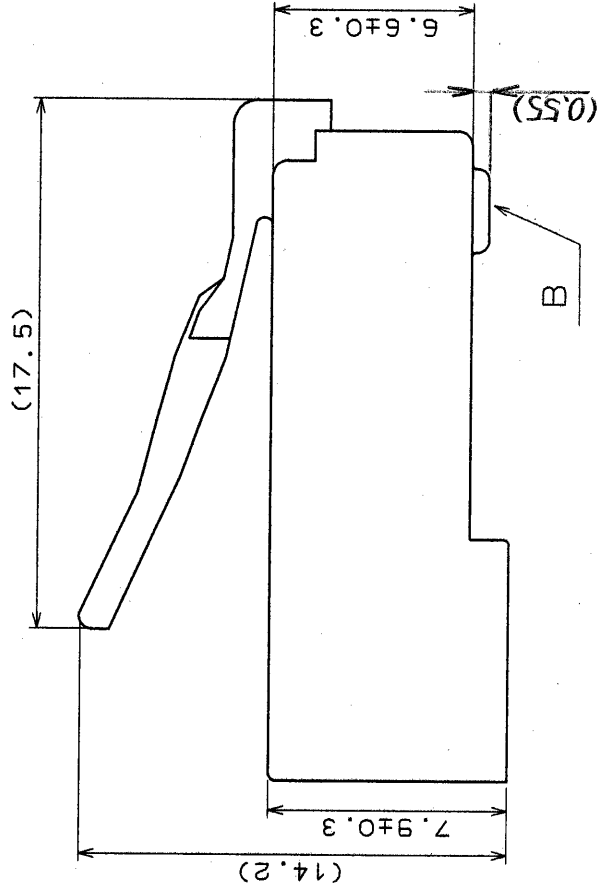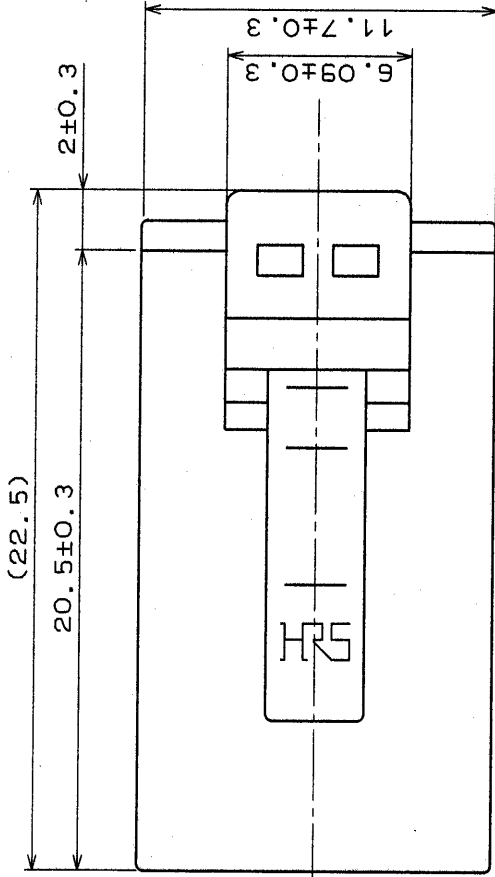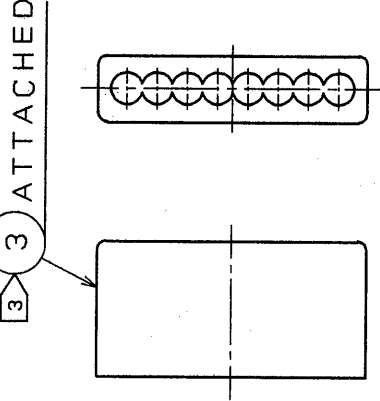

3 ATTACHED

- NOTES
- 1 THE DIMENSION IN PARENTHESIS ARE FOR REFERENCE.
 - 2 APPLICABLE CABLE OF THIS CONNECTOR IS SHOWN IN TABLE-1.
 - 3 THE ATTACHED SHALL BE USED TO ALIGN WIRES.
(CABLE SHALL BE ASSEMBLED WITH ADAPTOR INSERTED)
 - 4 USE THE JIGS SHOWN IN TABLE-2 FOR WIRING THIS CONNECTOR.

TABLE-2

EQUIPMENT	PART No.
SEMI-AUTO ASSEMBLY MACHINE	APPLICATOR 105 TM8/10P88
HAND TOOL	TC-2220-8/10P-88

2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 1.27μm(B AREA)			
1	POLYCARBONATE	CLEAR	3	POLYCARBONATE	CLEAR
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)					
DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
T. Watanabe		T. Watanabe	H. Minato	S. Watanabe	
'95.7.10		'95.7.10	'95.7.10	'95.7.10	'95.7.10
DRAWING NO.		PART NO.		TM10P-88P	
EDC3-028188		CODE NO.		CL222-1818-1	
SCALE 4 : 1		UNITS mm		FORM NO. 229	