


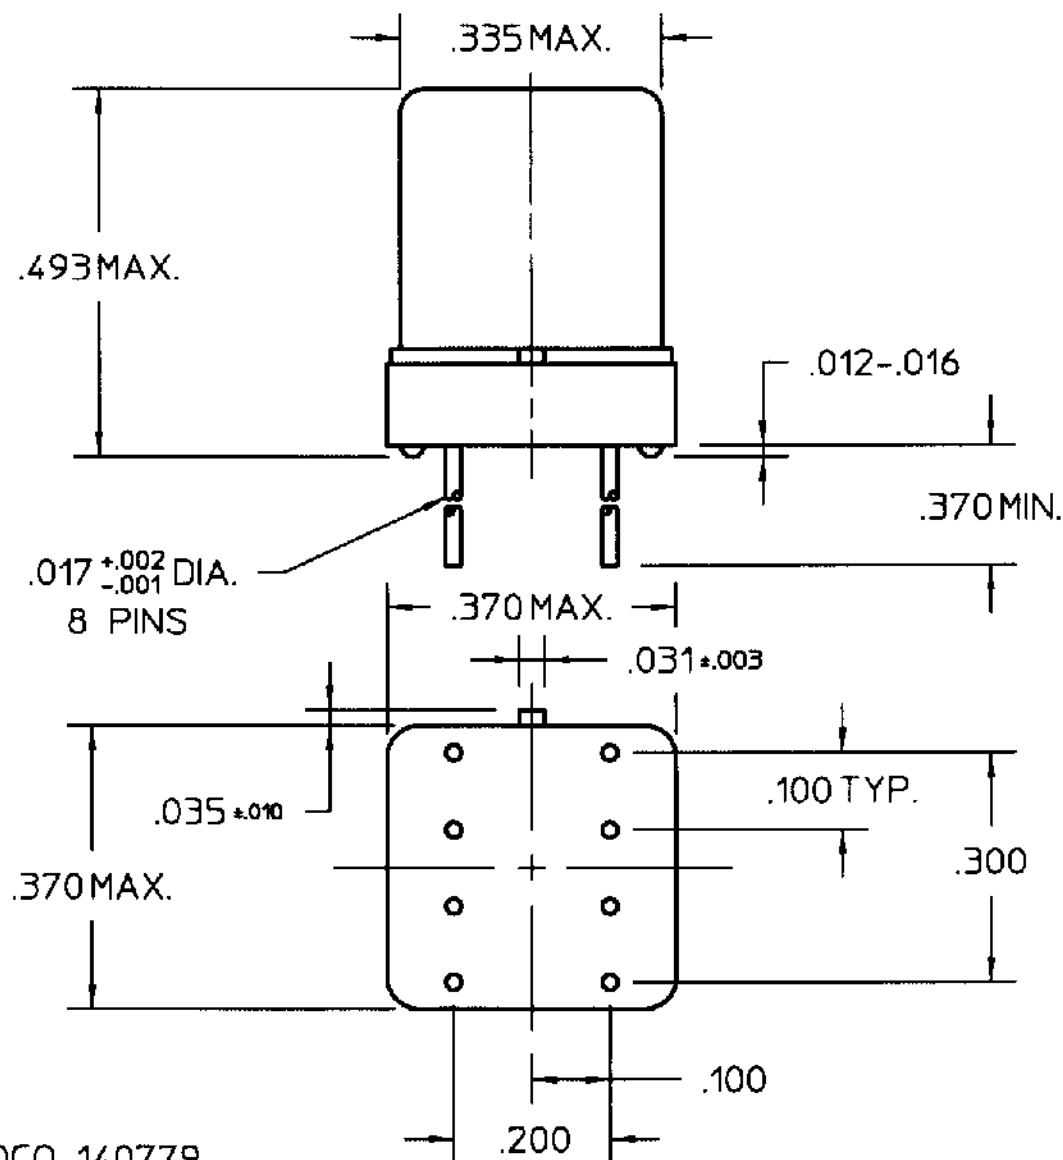

REV. 0 DCO 140779


COIL: @ 25°C
 RESISTANCE 3300 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 15.2 VDC
 MUST RELEASE 10.8 VDC MAX, 1.7 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4 MS MAX
 RELEASE TIME 7.5 MS MAX
 CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/3/98 [Signature] 12/4/98

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M39016/21-046L

TYPE JMSDD RELAY

JMSCDD-26XLS