


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #		STUD SIZE	DIMENSIONS mm				
			A ±0,51	W ±0,25	C ±0,38	M ±0,51	H ±0,25
PREFIX	PK						
PMV6-4F	-L -D	M4	26,42 (1.04)	8,13 (.32)	5,59 (.22)	20,57 (.81)	4,32 (.17)
PMV6-5F	-L -D	M5	26,42 (1.04)	9,65 (.38)	5,59 (.22)	20,57 (.81)	5,33 (.21)
PMV6-6F	-L -D	M6	29,46 (1.16)	10,92 (.43)	8,13 (.32)	23,11 (.91)	6,60 (.26)

NOTES:

1. USED FOR:
 - A. 600V MAX. VOLTAGE RATING
 - B. 105°C (221°F) MAX. TEMP. RATING
 - C. 2,5-6,0mm² (#12-10 AWG)
STRAINED, COPPER WIRE
(4,0-6,0mm² WITH CT-1551M)
2. MATERIAL:
 - A. STAMPING - 1,02mm (.04) THK COPPER, TIN PLATED
 - B. HOUSING - YELLOW VINYL
3. DIMENSIONS IN BRACKETS ARE IN INCHES
4. PACKAGE QTY:
 - A. STD: L=50
 - B. BULK: D=500
5. WIRE STRIP LENGTH: 7,9 ⁺⁸₋₀ (5/16 ^{+1/32}₋₀)
6. INSTALLATION TOOLS: REF. DWGS.
A41522, A41523, A41524, A41525

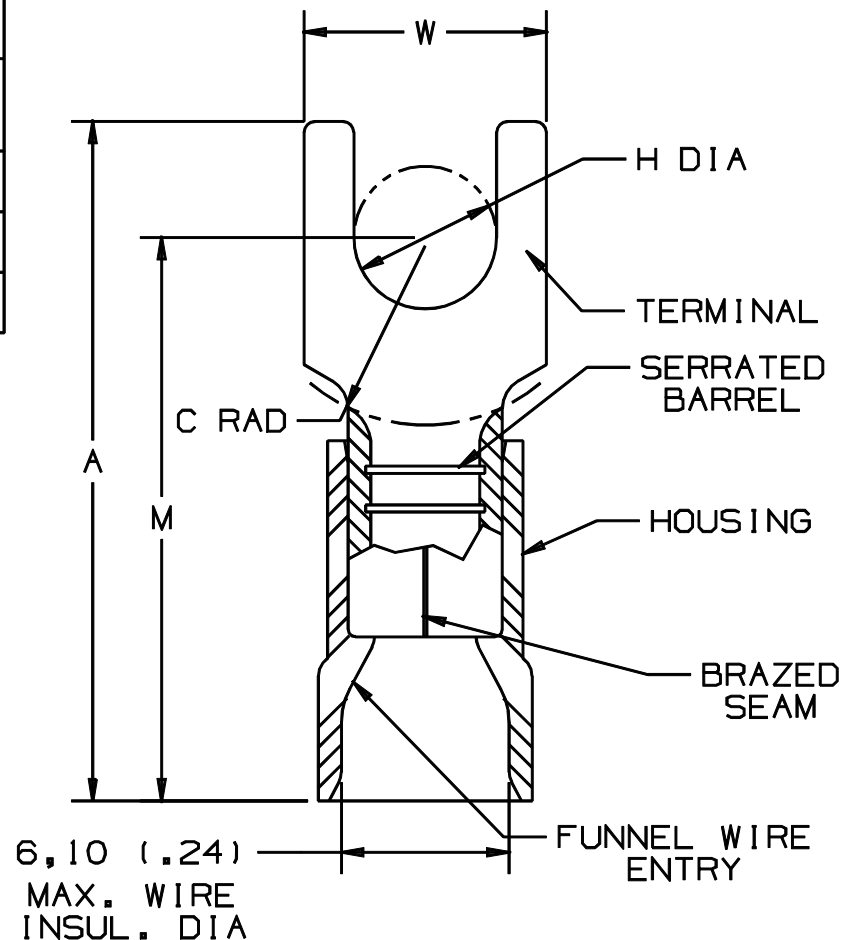

A41424_02

								P PANDUIT CORP. TINLEY PARK, ILLINOIS							
02	10/97	TM		CHANGED DECIMAL POINTS TO COMMAS				2PC. VINYL INSULATED METRIC FORKS 2,5-6,0mm ² BARREL							
01	3/97	JKD	SKB	ADDED CT-1551M TO NOTE, BRAZED SEAM WAS BUTTED, REMOVED "B" FROM PART NO.	05703	LA	DH								
00	7-90	BK	RLS	RELEASED	00687	LA	KRS								
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY	BDK	CHK'D	RLS	SCALE	NONE	DRAWING NO.	A41424