

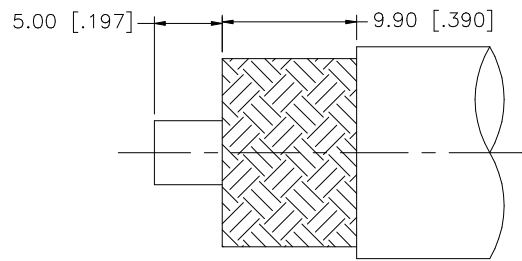
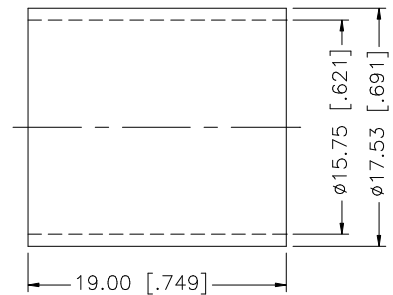


REV.	DATE	DESCRIPTION
A	06/15/99	MODIFY DESCRIPTION
B	11/14/00	UPDATE PART DIMENSIONS
C	02/19/07	UPDATE DRAWING FORMAT

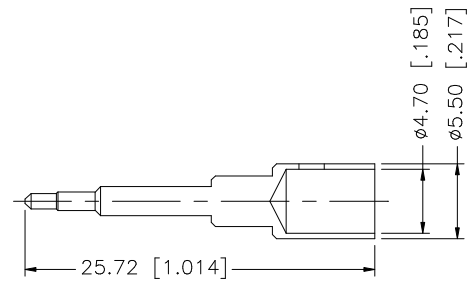

RECOMMENDED CABLE
STRIPPING DIMENSIONS

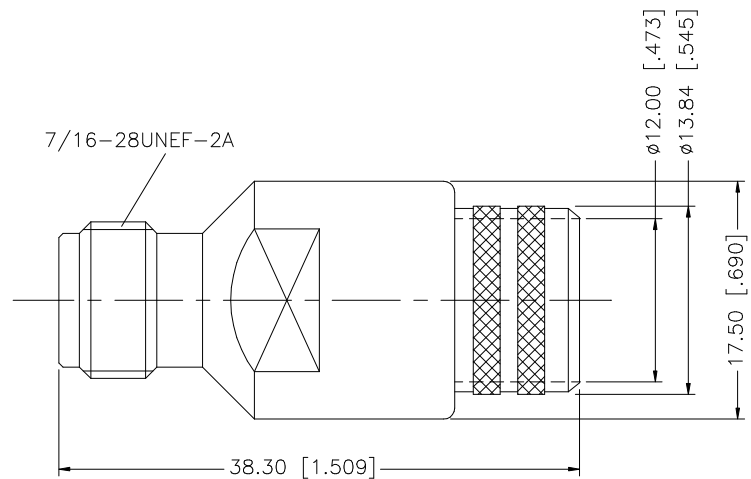

NOTES:

1. CONSULT AMPEHNOL CONNEX FOR CRIMP TOOL INFORMATION.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	G.R.S.	02/19/07												
7						CHECKED														
6						ISSUED				PART DESCRIPTION										
5											TNC CRIMP JACK – REVERSE POLARIZED (FOR LMR 600 CABLE)									
4	FERRULE	COPPER	NICKEL	1						PART NO.										
3	CONTACT PIN	BRASS	GOLD	1						122418RP										
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO.										
1	BODY	BRASS	NICKEL	1						122418RP.DWG										
DESCRIPTION					MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE		C:/122/122418RP.DWG		REV.		C	SIZE	A	SCALE	NA