

ILONA-RS

~10° spot beam

TECHNICAL SPECIFICATIONS:

Dimensions Ø 49.8 mm Height 29.3 mm Fastening socket **ROHS** compliant yes 🕕

MATERIAL SPECIFICATIONS:

Component **Type ILONA-RS** Single lens



Colour Material **Finish PMMA** clear

ORDERING INFORMATION:

Component


C16686_ILONA-RS

» Box size: 480 x 280 x 300 mm

Qty in box MOQ MPQ Box weight (kg)

297 10.8 33 33



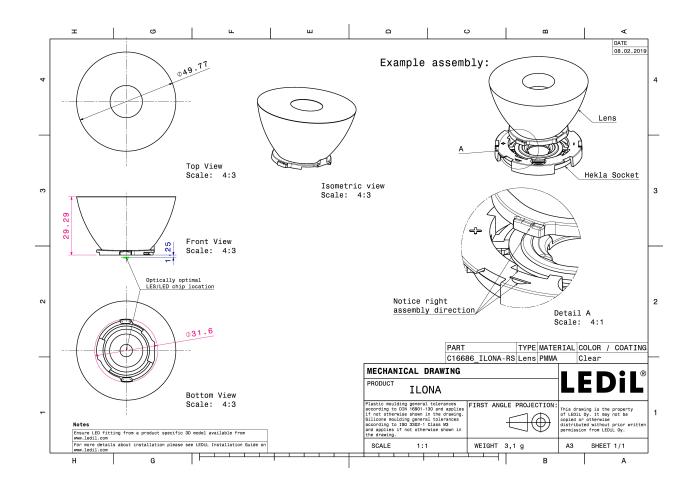



PHOTOMETRIC DATA (MEASURED):




LED Vesta DTW 9mm (4W/6W/12W)

FWHM 19.0°
Efficiency 93 %
Peak intensity 6.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

Bender Wirth: 490 Typ L8







CITIZEN

LED CLU7A2 (LES 4.2mm)

FWHM 9.0°
Efficiency 94 %
Peak intensity 26 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C






CITIZEN

LED CLU7B2
FWHM 8.0°
Efficiency 94 %
Peak intensity 32.2 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C






DESCRIPTION LUMILEDS

LED LUXEON CX Plus CoB - HD S01H4

FWHM 12.0°
Efficiency 94 %
Peak intensity 16 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla







PHOTOMETRIC DATA (MEASURED):




LED LUXEON CX Plus CoB - HD S01H6 / HD S02H6

FWHM 13.0° Efficiency 94 % Peak intensity 13.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla






MILEDS

LED LUXEON CX Plus CoB - HD S04H9

FWHM 19.0°
Efficiency 94 %
Peak intensity 7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla






ELUMINUS

LED CXM-3
FWHM 9.0°
Efficiency 94 %
Peak intensity 31.3 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C






LUMINUS

LED CXM-4
FWHM 10.0°
Efficiency 94 %
Peak intensity 21.9 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C







PHOTOMETRIC DATA (MEASURED):

OSRAM

LED


OSTAR Stage (S2WN)

FWHM 7.0° Efficiency 94 % Peak intensity 42.7 cd/lm LEDs/each optic 1 Light colour White

F15859_HEKLA-SOCKET-I

Required components:






OSRAM Opto Semiconductors

LED OSTAR Stage (S2WP)

FWHM 9.0° 94 % Efficiency Peak intensity 29.2 cd/lm LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I






TRIDONIC

LED SLE G7 LES09

FWHM 20.0° Efficiency 95 % Peak intensity 7.2 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C




XICATO

XOB 6 mm **FWHM** 14.0° Efficiency 93 % Peak intensity 13.5 cd/lm

LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C








PHOTOMETRIC DATA (MEASURED):

XICATO

LED XOB 9.8 mm
FWHM 19.0°
Efficiency 94 %
Peak intensity 7.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C





Published: 14/05/2019



PHOTOMETRIC DATA (SIMULATED):

bridgelux


 LED
 V4 HD

 FWHM
 10.0°

 Efficiency
 95 %

 Peak intensity
 24.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:
FP15490_HEKLA-A



bridgelux.

 LED
 V6 HD


 FWHM
 12.0°

 Efficiency
 94 %

 Peak intensity
 14.9 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C




bridgelux

LED Vero SE 10
FWHM 16.0°
Efficiency 94 %
Peak intensity 7.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM 18.0°
Efficiency 93 %
Peak intensity 8.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
FP15501_HEKLA-C






PHOTOMETRIC DATA (SIMULATED):

CITIZEN

LED CLU700/701/702

FWHM 12.0° Efficiency 94 % Peak intensity 16.9 cd/lm

LEDs/each optic 1
Light colour White
Required components:
FP15501_HEKLA-C




CITIZEN

LED CLU710/711

FWHM 17.0°
Efficiency 92 %
Peak intensity 9.3 cd/lm
LEDs/each optic 1

Light colour White Required components: FP15949_HEKLA-I




CREE 🕏

LED CXA/B 13xx

FWHM 13.0°
Efficiency 93 %
Peak intensity 15 cd/lm

LEDs/each optic 1
Light colour White
Required components:
FP15957_HEKLA-J



DESCRIPTION LUMILEDS

LED LUXEON CoB 1202s

FWHM 12.0°
Efficiency 95 %
Peak intensity 15.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H

PHOTOMETRIC DATA (SIMULATED):

MUMILEDS

LED LUXEON CoB 1204/1205

FWHM 26.0° Efficiency 94 % Peak intensity 3.9 cd/lm LEDs/each optic 1

Light colour White Required components:

MUMILEDS

LED LUXEON CoB 1208

FWHM 28.0°
Efficiency 91 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour White


Required components:

MUMILEDS

LED LUXEON CoB 1208

FWHM 27.0°
Efficiency 91 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K






LED CxM-6 (13.5x13.5)

FWHM 14.0°
Efficiency 94 %
Peak intensity 13.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C



Published: 14/05/2019



PHOTOMETRIC DATA (SIMULATED):


WNICHIA

LED COB S-Type (LES 6)

FWHM 12.0° Efficiency 93 % Peak intensity 15.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G




WNICHIA

LED COB S-Type (LES 6)

FWHM 12.0°
Efficiency 93 %
Peak intensity 15.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G




WNICHIA

LED NFSWE11A

FWHM 18.0°
Efficiency 88 %
Peak intensity 8.4 cd/lm
LEDs/each optic 30
Light colour White

Required components:

C16142_HEKLA-SOCKET-K




SAMSUNG

LED LC010C FWHM 14.0°

Efficiency 94 % Peak intensity 14.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:
FP15947_HEKLA-G



Published: 14/05/2019



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy