
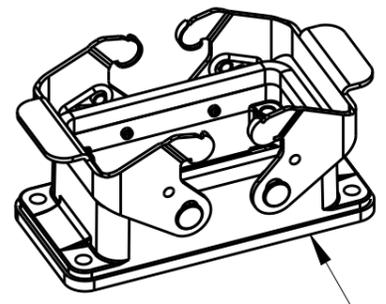
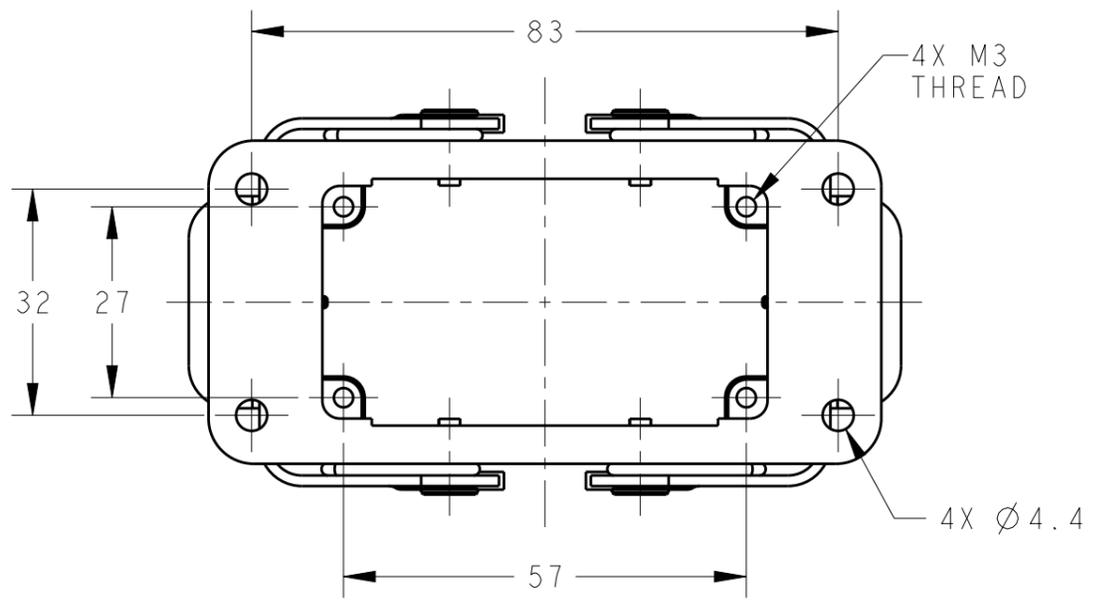
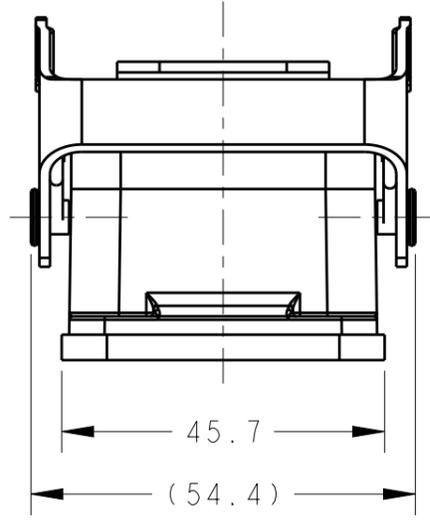


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW


NOTES:
 1. TECHNICAL CHARACTERISTICS:
 HOUSING MATERIAL: DIE CAST ALUMINIUM ALLOY
 SURFACE: POWDER COATED, GREY
 OPERATION TEMPERATURE: -40-+125°C
 DEGREE OF PROTECTION: IP65 (MATED)

注释:
 1. 技术参数:
 下壳材料: 铝合金
 表面处理: 粉末涂层, 灰色
 工作温度: -40-+125°C
 防护等级: IP65(配合)

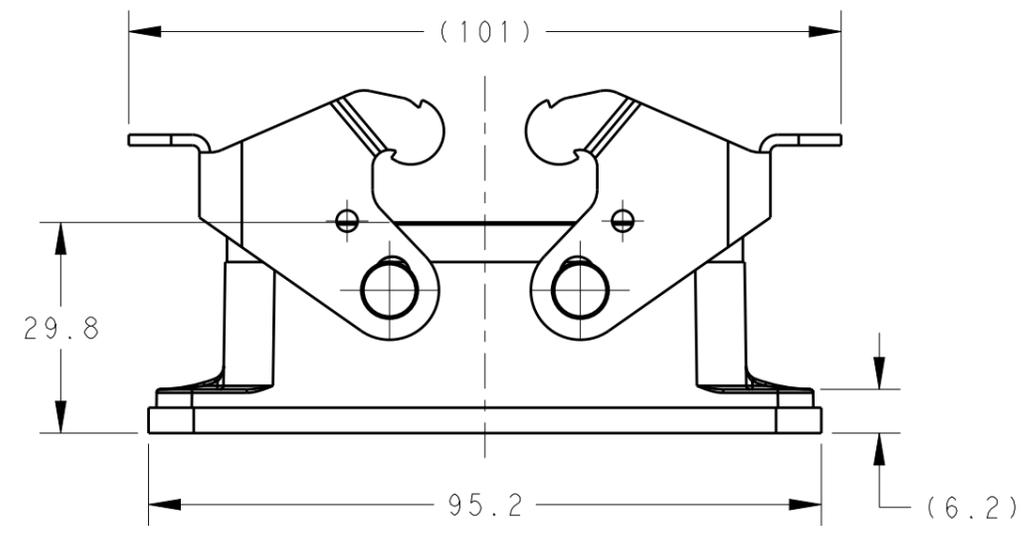

SCALE 1:2

PANEL CUT OUT

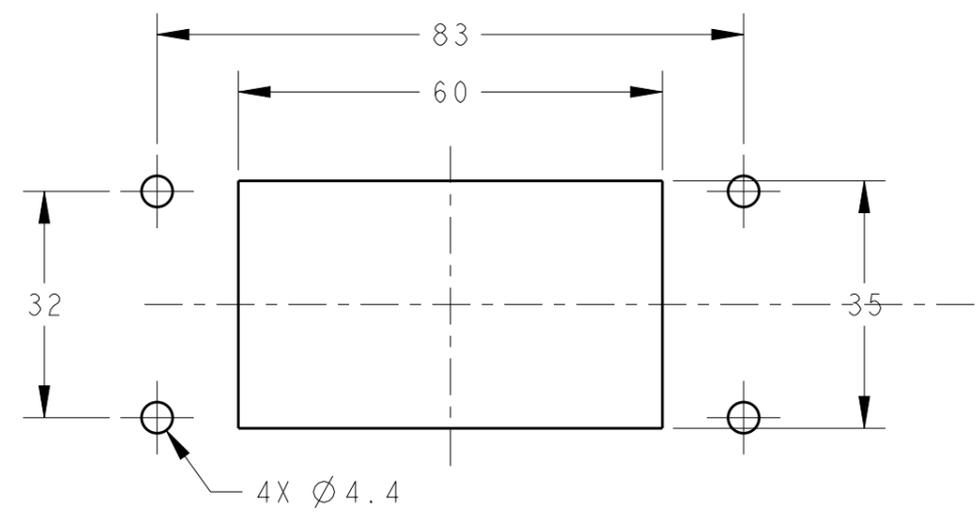

T1410102000-000	H10B-AG	GREY
T1410102000-100	H10B-AG	GREY FLANGE SEALING FIXED BY GLUE WITH HOUSING
PART NUMBER	DESCRIPTION	REMARK

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25JUN2015 David Wang	TE Connectivity	
DIMENSIONS: mm		CHK 25JUN2015 Chris Wang		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25JUN2015 Xiang Xu	NAME H10B-AG	
0 PLC ±-	1 PLC ±-	PRODUCT SPEC 108-137013	SIZE A3	
2 PLC ±-	3 PLC ±-	APPLICATION SPEC 114-137013	CAGE CODE 00779	DRAWING NO. T1410102000X00
4 PLC ±-	ANGLES ±-	WEIGHT -	RESTRICTED TO -	
MATERIAL -	FINISH -	Customer Drawing	SCALE 1:1	SHEET 1 OF 1
-	-			REV A