

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0528080770

Status:

Active

Overview:

Description:

1.00mm (.039") Pitch FFC/FPC Connector, SMT, Vertical, Non-ZIF Receptacle, 7 Circuits, Lead-free

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52808Series

Agency Certification

UL

E29179

General

Product Family

Series

Overview

Product Name

FFC/FPC Connectors

52808

ffc_fpc_smt

N/A

Physical

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Contact Position

Durability (mating cycles max)

Entry Angle

Flammability

Mated Height (in)

Mated Height (mm)

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Orientation

PCB Locator

PCB Retention

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Polarized to PCB

Stackable

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Wire/Cable Type

7

7

Natural

N/A

10

N/A

94V-0

0.199 In

5.05 mm

Phosphor Bronze

Tin-Bismuth

Tin-Bismuth

High Temperature Thermoplastic

1

Vertical

No

None

Embossed Tape on Reel

0.039 In

1.00 mm

0.039 In

1.00 mm

40

1

40

1

No

No

Yes

-20°C to +80°C

Surface Mount

FFC/FPC

Electrical

Current - Maximum per Contact

Voltage - Maximum

0.5A

125V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-52808-001

Product Specification

PS-52808-004, RPS-52808-039, RPS-52808-044,
RPS-52808-045, RPS-52808-047, RPS-52808-048,
RPS-52808-049
SD-52808-027, SD-52808-028

Sales Drawing

This document was generated on 06/05/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

F

E

D

C

B

A

F



E

D

C

B

A

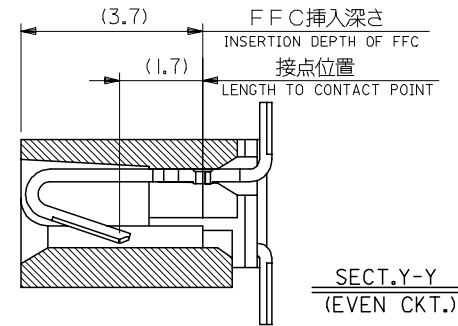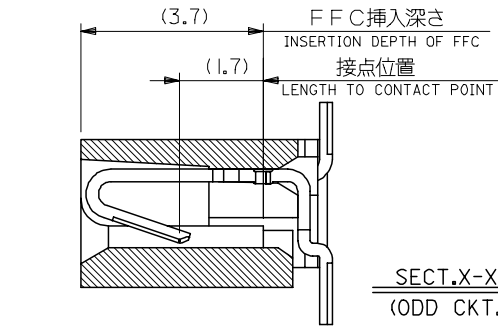

33	31.05	29	52808-3019	30
32	30.05	28	-2919	29
31	29.05	27	-2819	28
30	28.05	26	-2719	27
29	27.05	25	-2619	26
28	26.05	24	-2519	25
27	25.05	23	-2419	24
26	24.05	22	-2319	23
25	23.05	21	-2219	22
24	22.05	20	-2119	21
23	21.05	19	-2019	20
22	20.05	18	-1919	19
21	19.05	17	-1819	18
20	18.05	16	-1719	17
19	17.05	15	-1619	16
18	16.05	14	-1519	15
17	15.05	13	-1419	14
16	14.05	12	-1319	13
15	13.05	11	-1219	12
14	12.05	10	-1119	11
13	11.05	9	-1019	10
12	10.05	8	-0919	9
11	9.05	7	-0819	8
10	8.05	6	-0719	7
9	7.05	5	-0619	6
8	6.05	4	-0519	5
7	5.05	3	52808-0419	4

注記 NOTES:

1. 使用材料 MATERIAL

ハウジング: PPS, UL94V-0

HOUSING: PPS, UL94V-0

ターミナル: リン青銅 ($t=0.25$)

TERMINAL: PHOSPHOR BRONZE

メッキ: ニッケル下地鍍ビスマスメッキ

PLATING: TIN-BISMUTH OVER NICKEL


△基準面 [E] からのソルダーテールの半田付け面のズレ量は、上方向に0.1MAX. 下方向0.15MAX. とする。

MISALIGNMENT OF SOLDER TAIL FROM [E]: UPPER DIRECTION 0.1 MAX., LOWER DIRECTION 0.15 MAX.


△偶数極に適用。
APPLY FOR EVEN CKT.

4. 本製品は52808-**-10の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52808-**-10

REVISED EC NO: J2006-1497 DRWN: NABE1 CHKD: TOYODA APPR: NUKITA A	DESCRIPTION 2005/11/04 2005/11/07 2005/11/11	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY M. NABE1	DATE '04/02/19	TITLE 1.0 FFC CONN. NON ZIF SMT. ST. -LEAD FREE-				
		10 OVER 30 UNDER	±0.25	CHECKED BY M. SASAO	DATE '04/02/19					
		30 OVER	±0.3	APPROVED BY M. SASAO	DATE '04/02/19					
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52808-027		1 OF 1		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

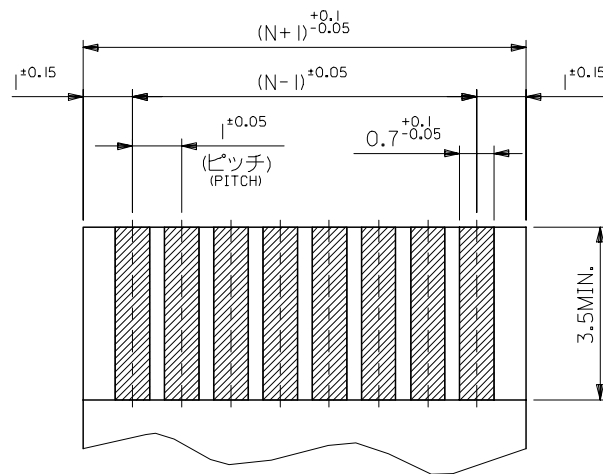

(仕上がり厚さ 0.3 ± 0.03)
THICKNESS
適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION.

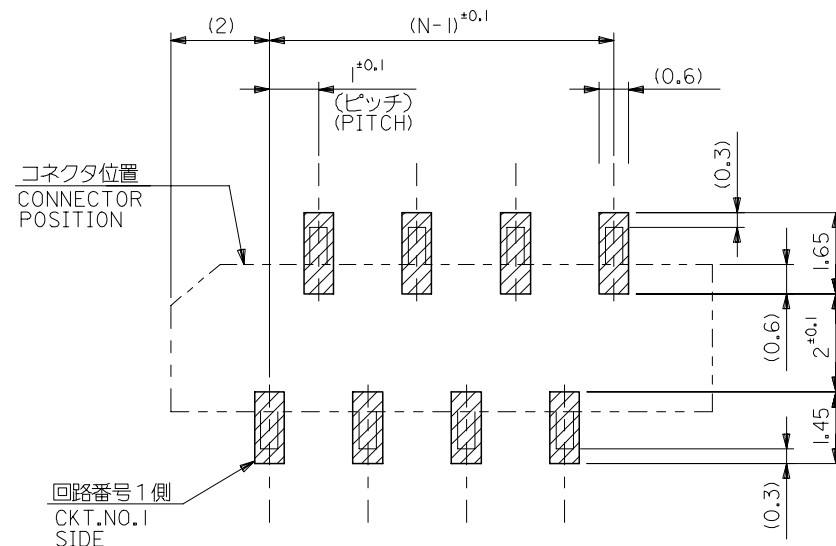

参考基板レイアウト (マウント面)
RECOMMENDED P.C.BOARD
PATTERN DIMENSION. (REF.)
(MOUNTING AREA)

FPCについて:

打抜き方向は、導体側から補強板側を推奨いたします。

補強フィルム材質は、ポリイミドを推奨いたします。

接着剤は、熱硬化接着剤を推奨いたします。

ABOUT FPC:


RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.

RECOMMENDED MATERIAL:

STIFFENER FILM: POLYIMIDE


BONDING AGENT: THERMOSETTING BONDING AGENT

REVISED EC NO: J2006-1497 DRAWN:MABEI CHKD:KTOYODA APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY M.NABEI	DATE '04/02/19	TITLE 1.0 FFC CONN. NON ZIF SMT. ST. -LEAD FREE-			
		10 OVER 30 UNDER	±0.25	CHECKED BY M.SASAO	DATE '04/02/19				
		30 OVER	±0.3	APPROVED BY M.SASAO	DATE '04/02/19	MOLEX MOLEX INCORPORATED			
		ANGULAR ±3 °		MATERIAL NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52808-027		2 OF 2	
REV A		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

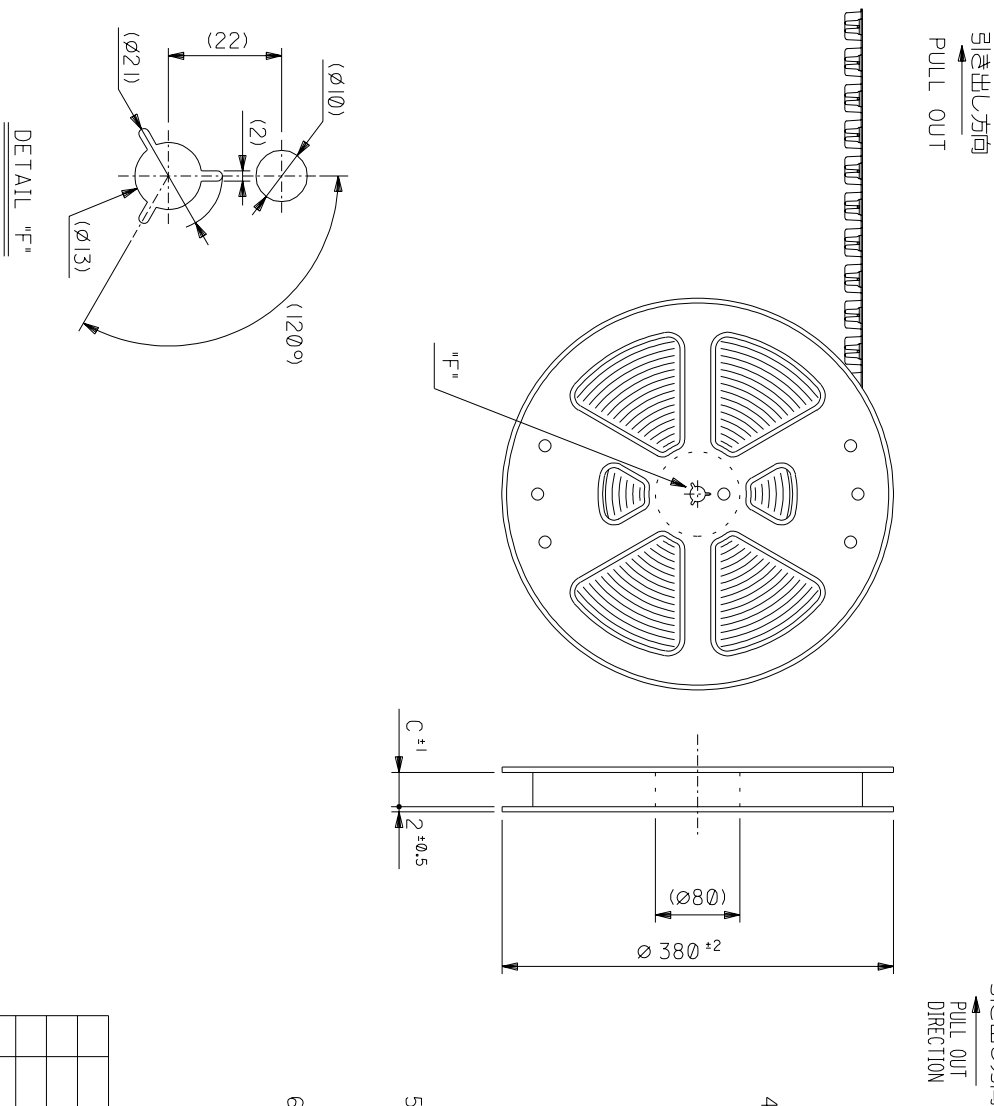


NOTES

1. 製品詳細方法については図面 SD-52808-027 を参照下さい。
RE DETAILED DIMENSION, SEE SD-52808-027
2. 梱包数量: 1000個/リール
NUMBER OF CONNECTORS : 1000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

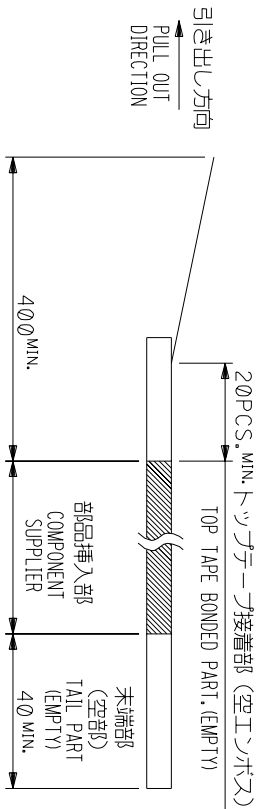


4. トッテナーズの剥離強度： 0.1 ～ 1.3N (10 ～ 130gf) (剥離方向は下図参照)
- 尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
- PEELING OFF FORCE OF TOP TAPE : 0.1 ～ 1.3N (10 ～ 130gf)
- (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
- THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
- PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

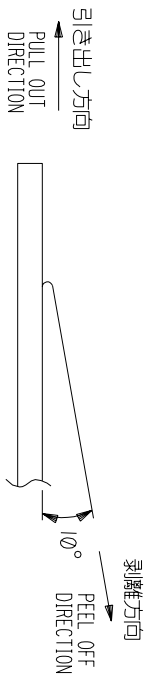

5. 材料(MATERIAL)
キャリアテープ(CARRIER TAPE): ポリプロピレン(POLYPROPYLENE)
トップテープ(TOPTAPE): PET・PE・PEF
リール(REEL): ポリスチレン(PS) <リサイクル材を含む>
POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>
6. 本製品は52808-＊＊900の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52808-＊＊900


[illegible]

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEKULAPLAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
EN-01C032MXJ-32

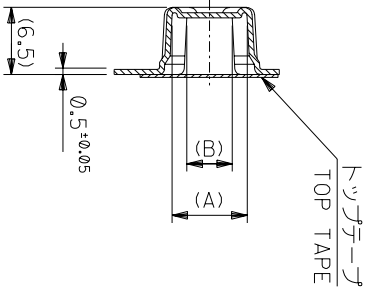


SECT:Y-Y

1 6mm幅キヤリテープ
16mm WIDTH CARRIER TAPE



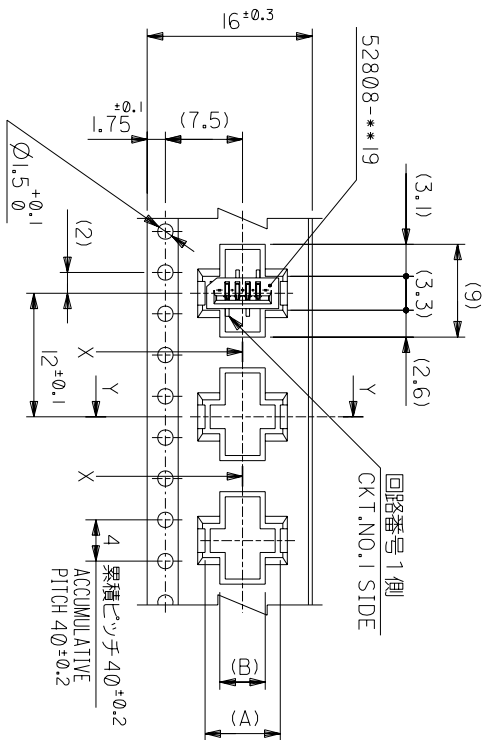


引き出し方向
PULL OUT DIRECTION

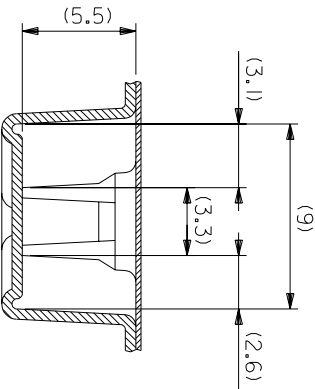

SECT:X-X
(SCALE:4-1)

52808-**-70		16		17.5	5.4	8.3	52808-0570	5
MODEL NO.		キャリアテープ幅		CARRIER TAPE WIDTH	C	(B)	(A)	極数 CKT.
MATERIAL		SHEET 1 OF 6 参照		REFER TO SHEET 1 OF 6		MOLEX-JAPAN CO.,LTD. モレックス株式会社		
		仕上げ		FINISH		REVISE ONLY ON CAD SYSTEM		
		適用電線範囲		WIRE RANGE		TITLE 名称		
		絶縁外径		INS. RANGE		1.0 FFC CONN NON ZIF		
		SMT		ST EMBSTD PKG		SD-52808-028		
		LEAD FREE				DWG. NO. (SHEET 2 OF 6) REV		
						SD-52808-028		

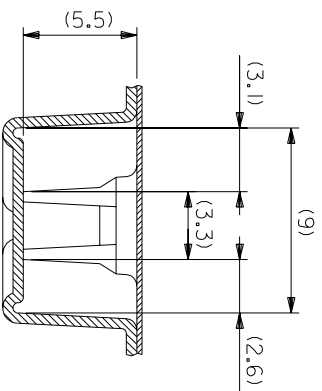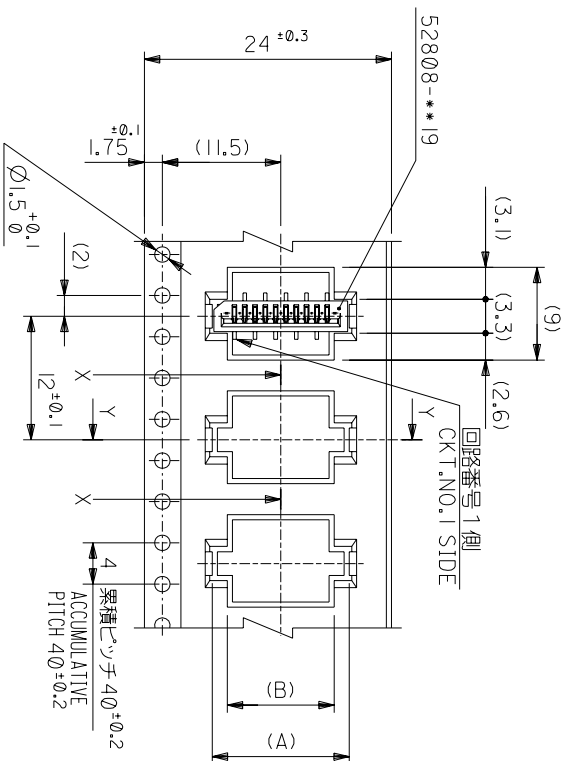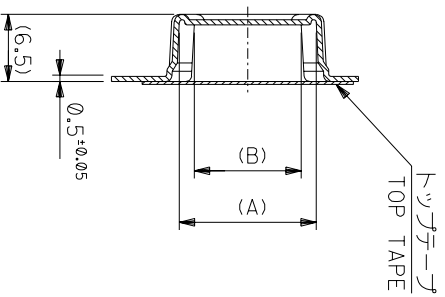

SECT:Y-Y


引き出し方向
PULL OUT DIRECTION

24mm幅キヤリテージ



MODEL NO.	CARRIER TAPE WIDTH	C	(B)	(A)	MATERIAL NO.	極数 Ckt.
			10.4	13.3	52808-1070	10
			9.4	12.3	52808-0970	9
			8.4	11.3	52808-0870	8
52808-70		24	7.4	10.3	52808-0770	7
			6.4	9.3	52808-0670	6

材料 MATERIAL		SHEET 1 OF 6 参照		MOLEX-JAPAN CO.,LTD.	
REFER TO SHEET 1 OF 6				MOLEX 日本モリス株式会社	
仕上げ FINISH		—#—		REVISE ONLY ON CAD SYSTEM	
適用規格範囲 WIRE RANGE		—#—		TITLE 名称	
被覆外径 INS. RANGE		—#—		1.0 FFC Conn NON ZIF	
DRAWN BY 04/02/9		CHK'D BY 04/02/9		SMT ST Embstd Pkg	
M.MABEL		M.SASAO		-LEAD FREE-	
M.S		M.S		DWG. NO. (SHEET 3 OF 6) REV	
04/02/9		04/02/9		SD-52808-028	
APP'D BY M.SASAO		SCALE —#—		0	
REVISION RECORD		変更内容			
L/R		記号			
GENERAL TOLERANCES		一般公差			
10 UNDER		10 UNDER			
10 OVER		10 OVER			
30 OVER		30 OVER			
角度 ANGLE		30°			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
 本図面は日本モロックス(株)の所有する情報を含むもので当社の許可なく複製を禁止する。
 EN-01C(032)MXJ-32

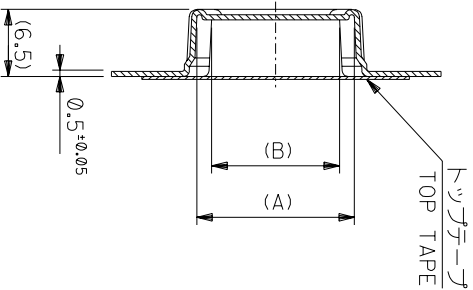

SECT:Y-Y

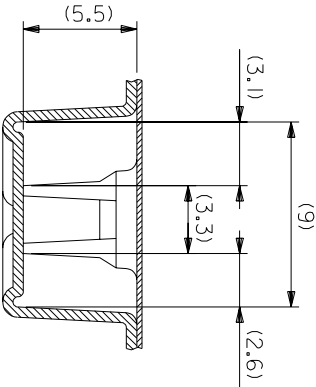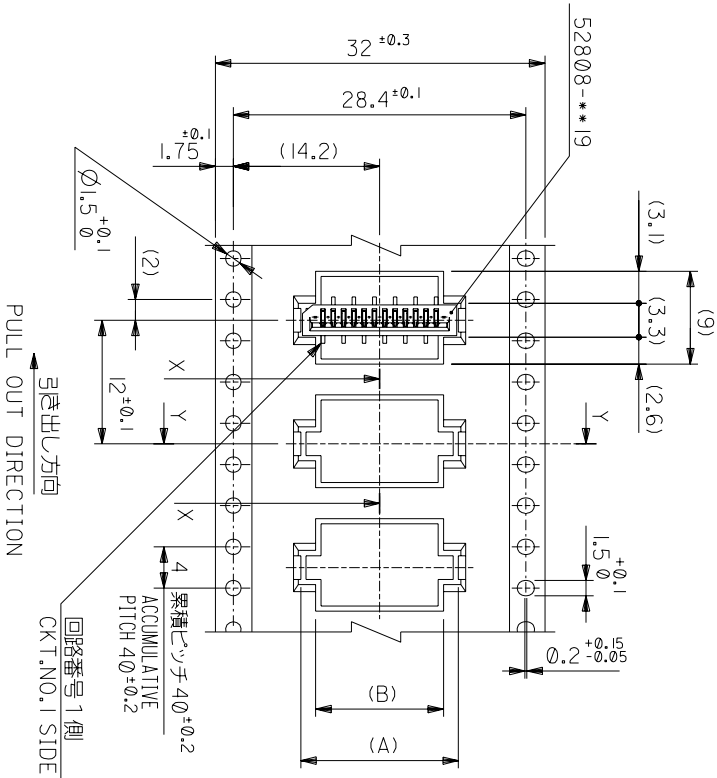

SECT:X-X
(SCALE:4-1)

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

角度	ANGLE
30°以上	30°
10°以下	10°
10°以下	10°
10°以下	10°


記号	変更内容	DR-CHK.	DATE
0	新規作成 (12004-2528)		
0	REVISION RECORD		

MODEL NO.	キャリアテープ幅 CARRIER TAPE WIDTH	C	(B)	(A)	MATERIAL NO.	種数 CKT.
52808-**-70	32	33.5	15.4	18.3	52808-1570	15
			14.4	17.3	52808-1470	14
			13.4	16.3	52808-1370	13
			12.4	15.3	52808-1270	12
			11.4	14.3	52808-1170	11



材料 MATERIAL SHEET 1 OF 6 参照
REFER TO SHEET 1 OF 6
仕上げ FINISH
適用電線範囲 INS. RANGE
M.NABEI
DRAWN BY 04/02/19 CHK'D BY 04/02/19
APP'D BY 04/02/19 M.SASAO
M.SASAO
SCALE 1/1

REVISE ONLY ON CAD SYSTEM
TITLE 名称
I.O. FFC Conn NON ZIF
SMT ST Embstp Pkg
-LEAD FREE-

DWG. NO. (SHEET 4 OF 6) REV
SD-52808-028 0

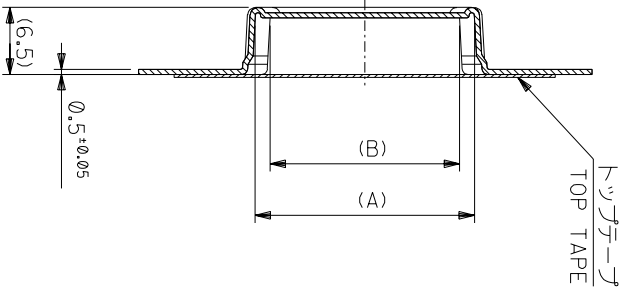

SECT:Y-Y

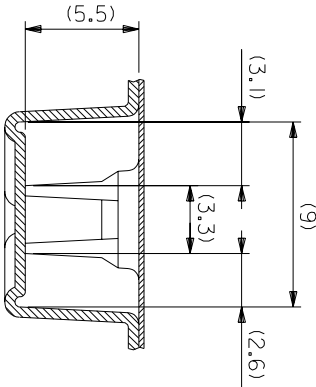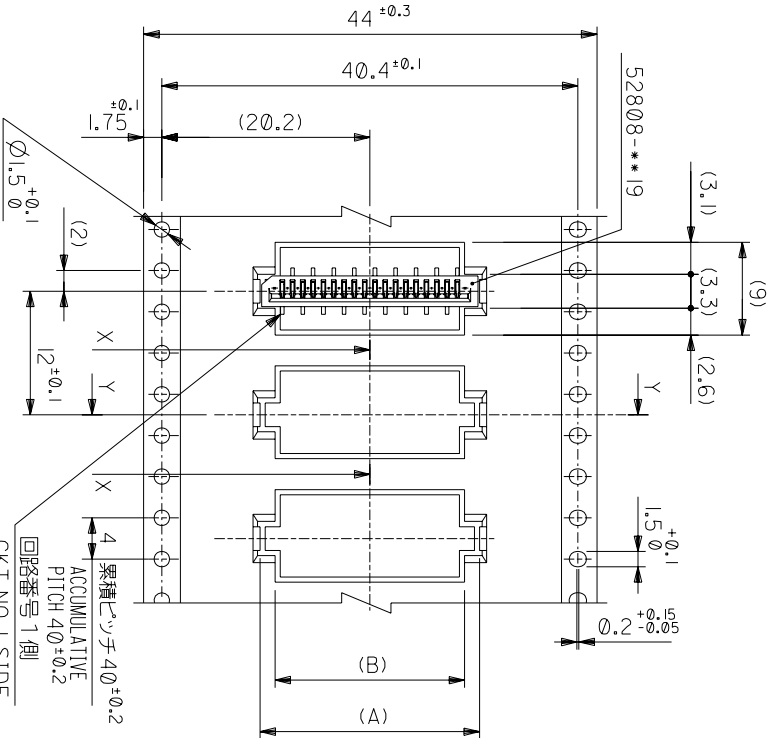

SECT:X-X
(SCALE:4-1)



44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

角度	ANGLE
30°以上	30°
10°以下	10°
10°以下	10°
10°以下	10°
10°以下	10°

一般公差	GENERAL TOLERANCES
記号	記号
公差	公差
公差	公差
公差	公差
公差	公差

	適用電線範囲	—H—
	WIRE RANGE	
	被覆外径	—H—
	INS. RANGE	
	DRAWN BY 04/02/19	CHK'D BY 04/02/19
	M.NABEI	M.SASAO
04/02/19	APP'D. BY 04/02/19	尺 寸
日付	M.SASAO	SCALE —H—

I.Ø FFC Conn NON ZIF	
SMT ST Embstp Pkg	
-LEAD FREE-	
DWG. NO. (SHEET 5 OF 6)	REV
SD-52808-028	0

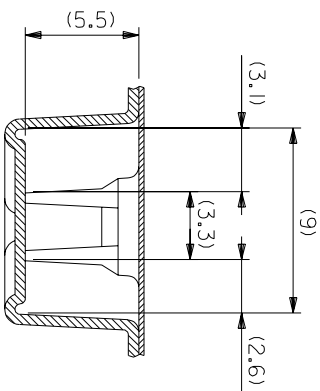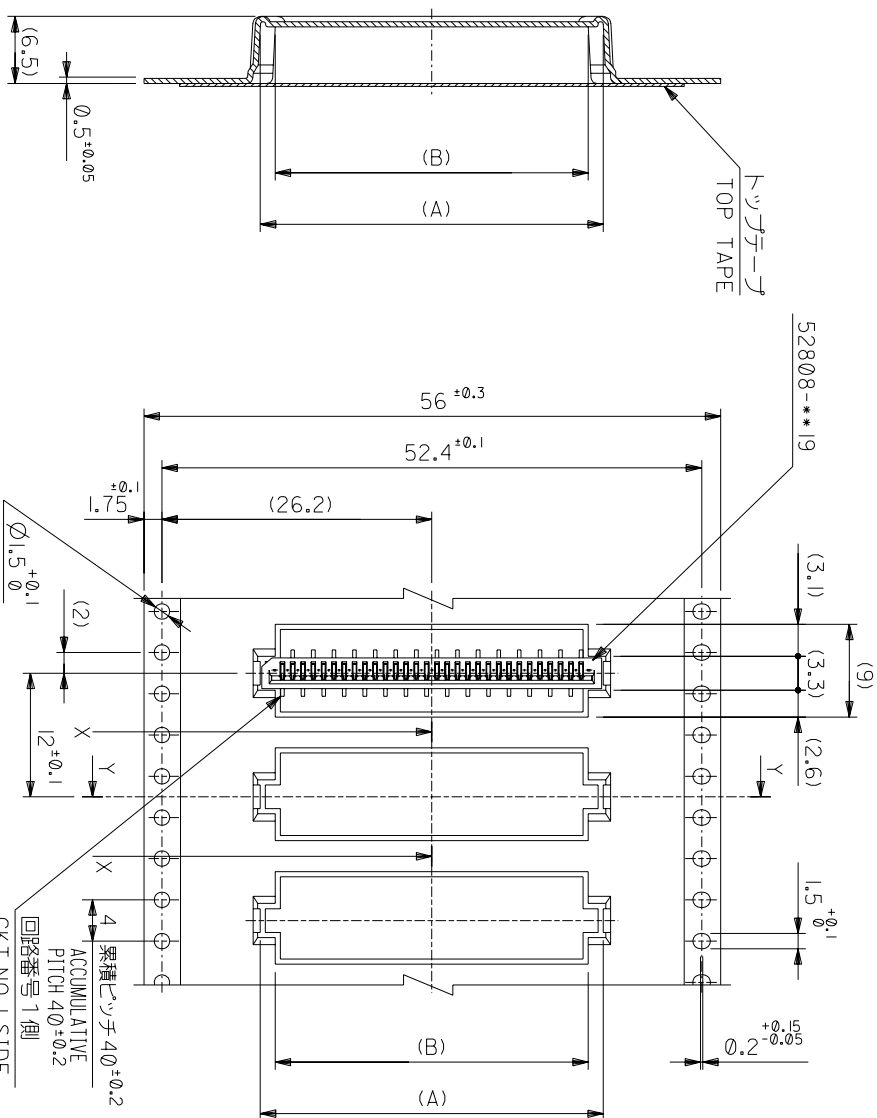SECT:X-X
(SCALE:4-1)

SECT:Y-Y

56mm幅キヤリャテータ

56mm WIDTH CARRIER TAPE

	56	57.5	30.4	33.3	52808-3070	30
MODEL NO.	キヤリアー幅 CARRIED TAPE WIDTH	C	(B)	(A)	MATERIAL NO.	極数 C/T.
52808-**70			29.4	32.3	52808-2970	29

角度 ANGLE	3°	適用電線範圍 WIRE RANGE	—#—	TITLE 名稱 I.Ø FFC Conn NON ZIF SMT ST Embstd Pkg -LEAD FREE-
30 以上 30 OVER	10.0	被覆外径 INS. RANGE	—#—	
10 以上 30 以下 10 OVER 30 UNDER	10.25			
10 以下 10 UNDER	10.2	DRAWN BY 04/02/19 M. YANBEI	CHK'D BY 04/02/19 M. SASAO	
GENERAL TOLERANCES	0	新製/作成 (12/004-2520) REPLAID		
一般公差 DIMENSIONS	0	變更內容 REVISION RECORD	DATE 04/02/19	DWG. NO. (SHEET 6 OF 6) REV SD-52808-028 0
DRG. CHK.	DATE	APPROD BY 04/02/19 M. SASAO	SCALE 1/1	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX (APAC) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
 本図面は日本モリス（株）の所有する情報を含むもので、当社の許可なく複製を禁止する。
 EN-01C(032)MXJ-32