
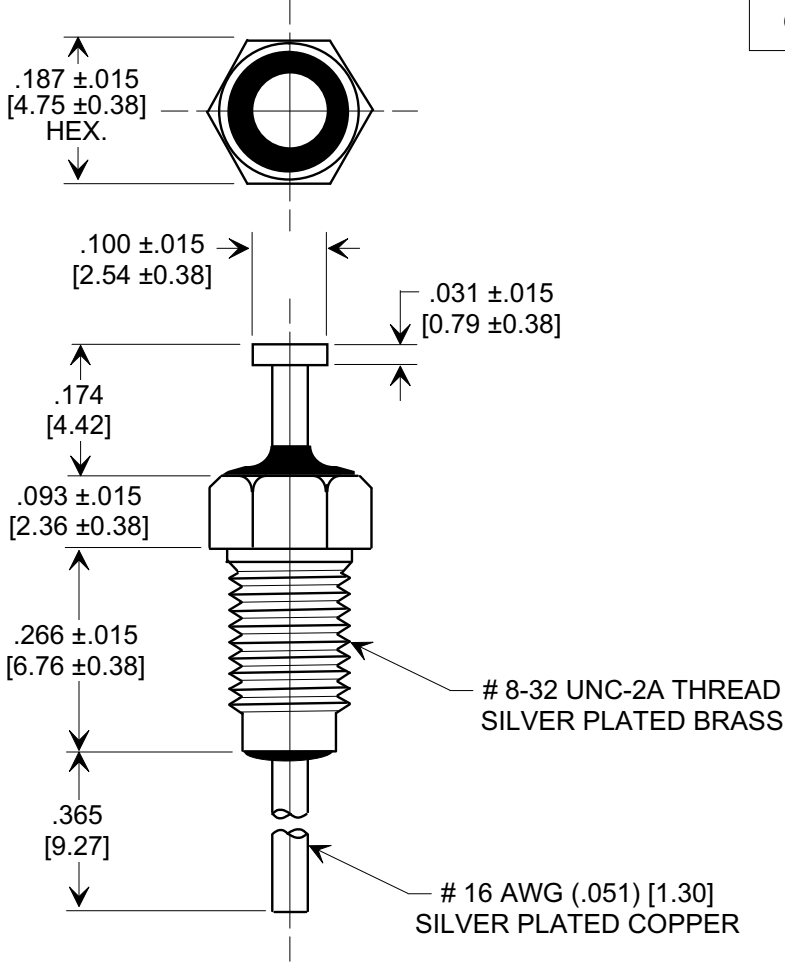



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



- NOTES:
- SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
  - MOUNTING TORQUE NOT TO EXCEED 5 lb - in. MAX. [.565 N-m].
  - TUSONIX STANDARD PART NUMBER: 2425-018-X7W0-502P. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-018-X7W0-502P LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
  - PART MARKING: STANDARD: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN FOR TRADEMARK AND CAP. CODE.

SPECIFICATIONS	
Tusonix Style:	2425-018
Capacitance Value:	5,000 pF
Capacitance Tolerance:	+100, -0%
Temp. Characteristic:	X7W
Rating:	200 VDC @ + 85°C / 100 VDC @ +125°C
Current (A):	20
Operating Range:	-55°C TO +125°C
Insulation Resistance:	10,000 megohms (min.) @ +25°C
DWV @ 2 Sec. Min:	600 VDC

REVISION RECORD  
 Original Release  
 ECO-2386

--TOLERANCES--  
 Unless Otherwise Specified

DECIMAL ± .031 [0.79]

ANGLES ±

**TUSONIX**  
 TUCSON, ARIZONA

Title **MINIATURE BUSHING FEED-THRU**

Drawn L.E. 09-06-11

Approved R.L. 09-06-11

**A** 2425-018-X7W0-502P