


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			T	REV PER ECO 14-014240	10-3-14	CT	CD

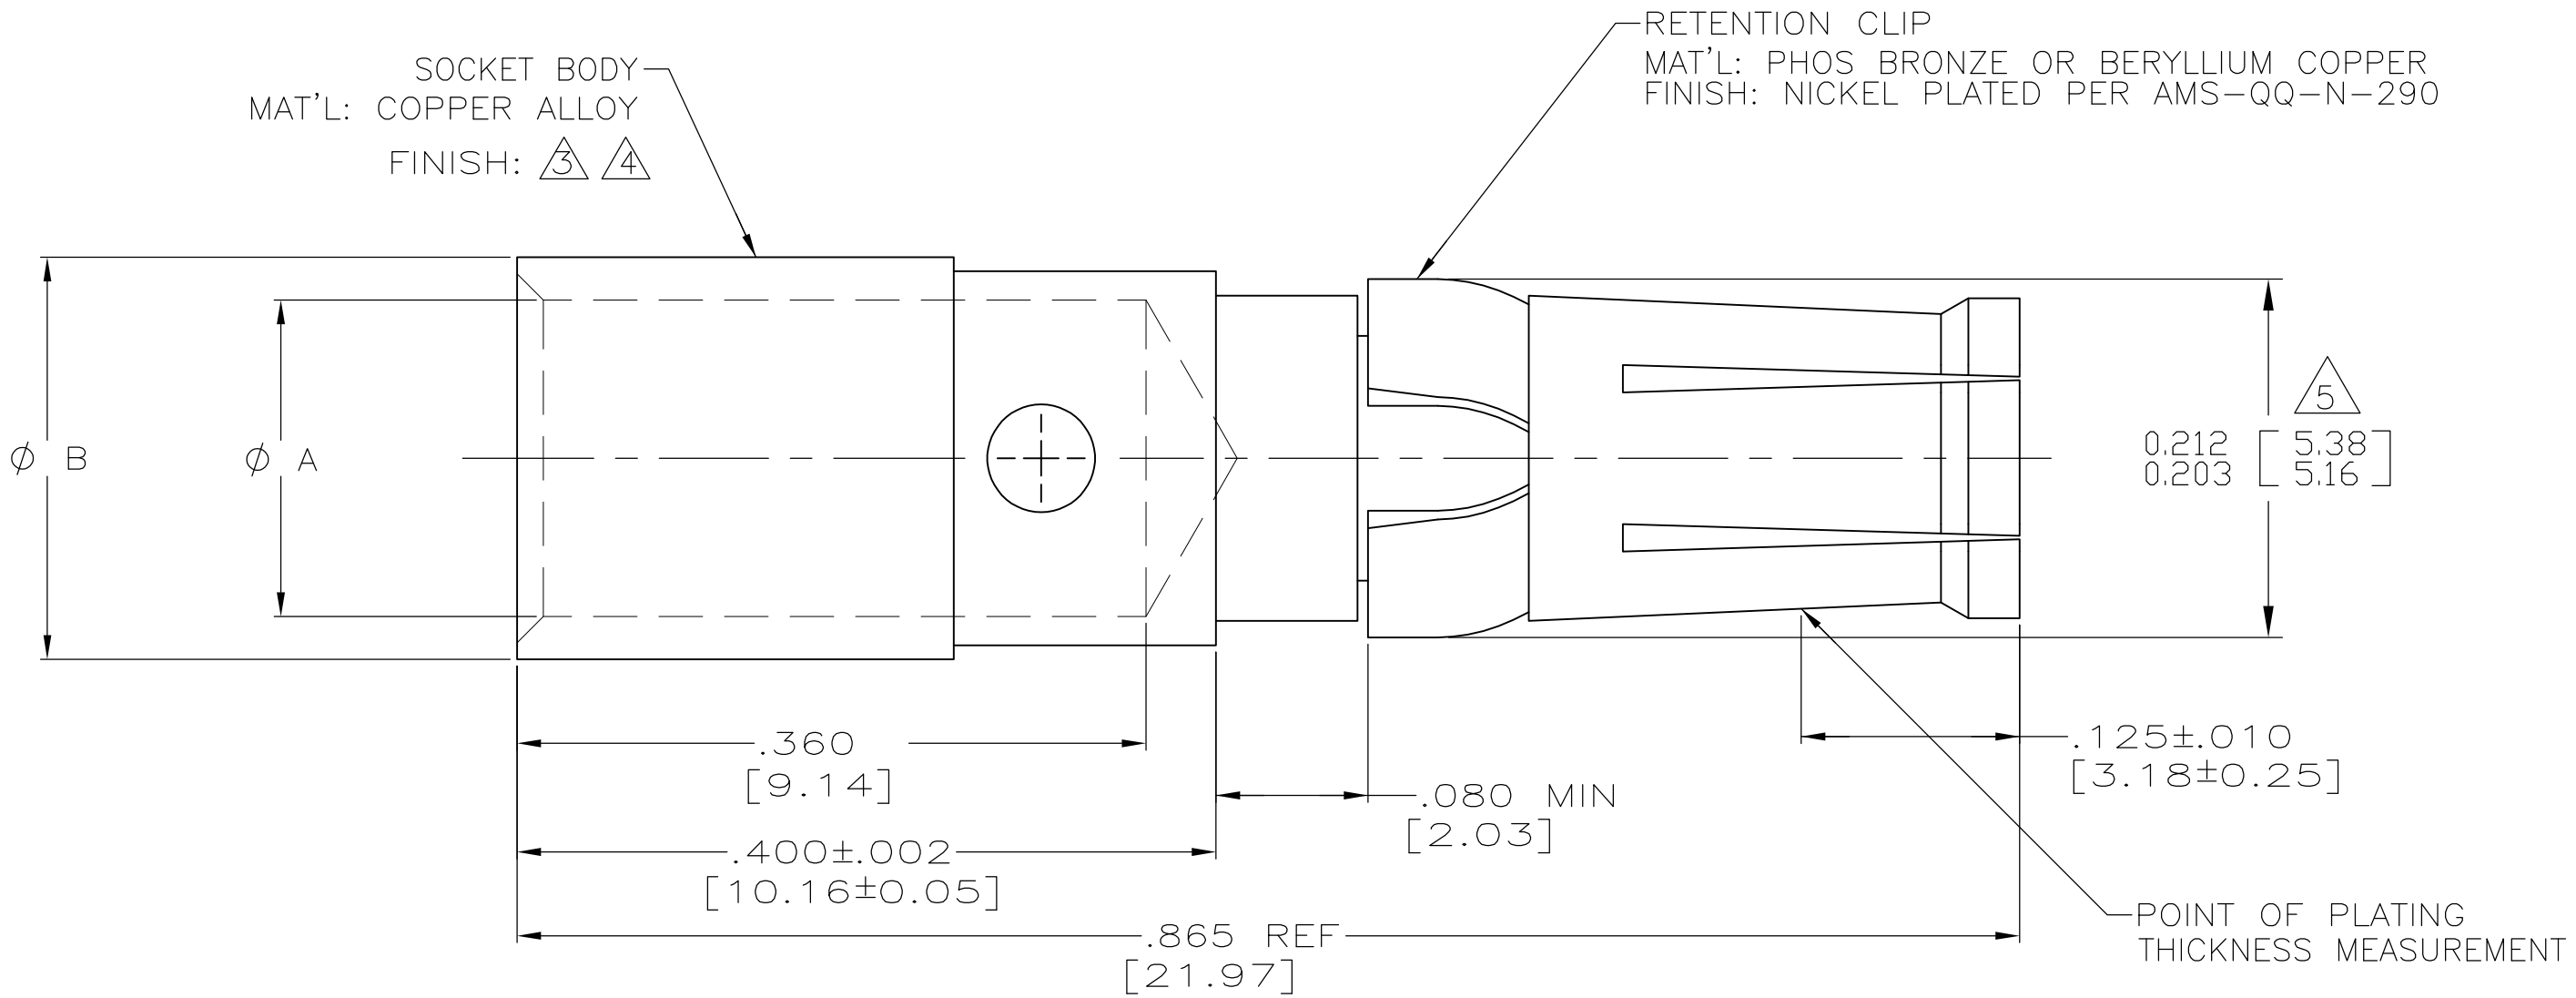

1. THIS PART CONFORMS TO REQUIREMENTS FOR DANIELS CRIMP TOOL NO. M300-BT, WITH DANIELS POSITIONER PART NO. SP689, STRIP LENGTH .375, #8 AWG SETTING 7, #10 AWG SETTING 6.
2. MATES WITH 211159-1 IN AMPLIMITE CONNECTOR ASSEMBLIES ONLY.
- A3 FINISH: PLATED GOLD .000050 [0.00127] MIN THK PER ASTM-B-488 OVER NICKEL .000050 [0.00127] MIN THK PER AMS-QQ-N-290.
- A4 FINISH: PLATED GOLD .000030 [0.00076] MIN THK PER ASTM-B-488 OVER NICKEL .000050 [0.00127] MIN THK PER AMS-QQ-N-290.
- A5 RING GAGE MUST BE USED TO CHECK THE ϕ .203-.212 DIMENSION.
- A6 RESTRICTED PART NUMBER.

PRELIMINARY NOT RELEASED FOR PRODUCTION	A6				1-211161-2
	A6				1-211161-1
PRELIMINARY NOT RELEASED FOR PRODUCTION	A4	.185 [4.70]	.136 [3.45]	#10 AWG	211161-4
PRELIMINARY NOT RELEASED FOR PRODUCTION	A4	.230 [5.84]	.181 [4.60]	#8 AWG	211161-3
	A3	.185 [4.70]	.136 [3.45]	#10 AWG	211161-2
	A3	.230 [5.84]	.181 [4.60]	#8 AWG	211161-1
	FINISH	DIM B	DIM A	WIRE SIZE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
SEE CALLOUTS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005 [0.13]
4 PLC ± -
ANGLES ± -
FINISH
SEE CALLOUTS

DWN
C.C.THOMAS
9-6-00

CHK
CHAD BAKER
9-6-00

APVD
CHAD BAKER
9-6-00

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

NAME
ASSEMBLY, SOCKET CONTACT
POWER VIII, #8 & #10 AWG

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-211161

RESTRICTED TO
—

SCALE
10:1

SHEET
1 of 1

REV
T