



## Soldering Tips - Weller Compatible

### MS SERIES

**COMPATIBLE STATIONS:** Weller WSL, Weller WSL2, Weller WD1, Weller WD2, Weller WS80, Weller WDS80, Weller WSD81, Weller WSP 80, Weller WPR 80

Plato is one of the largest manufacturers of solder tips in the world, producing tips to fit all of the most popular solder stations. The long life and fast heat recovery of a Plato solder tip increases user effectiveness and decreases production times. All Plato solder tips manufactured since January 2004 are tinned with Lead-Free solder. Plato is the name for reliable soldering supplies.

**Long Life:** Using a high quality Plato solder tip increases solder speeds and decreases the total cost of manufacture. Higher temperatures and high tin content solders, common in lead-free solder processes, place additional strain on soldering iron tips. The long life of a Plato solder iron tip reduces tip changes, decreasing the total number of tips used and decreasing production time.

**Rapid Heat Recovery:** Plato solder tips are constructed from highly conductive premium grade copper to transmit heat to the work more quickly than other brands. This quick heat recovery enables more joints to be soldered per minute, thus reducing manufacturing time and costs.




- Fast heat recovering increases soldering speed
- Longer tip reduces manufacturing costs
- Fewer tip change overs

## Product Dimensions


### MS-4140 Conical

0.8mm  
10 units/case




### MS-4120 Point

Cross Reference: Weller LT1  
0.25mm  
10 units/case




### MS-4110 Point, long

Cross Reference: Weller LT1L  
0.25mm  
10 units/case



### MS-4100 Point, micro

0.25mm  
10 units/case



### MS-5160 Bevel, micro

Cross Reference: Weller LT4W  
1.2mm  
10 units/case



### MS-3125 Angled SMD


Cross Reference: Weller LT4X  
0.4mm  
10 units/case






### MS-3200 Screwdriver

Cross Reference: Weller LTA  
1.6mm  
10 units/case




### MS-3300 Screwdriver

Cross Reference: Weller LTB  
2.4mm  
10 units/case




### MS-3300LF Screwdriver, long-life

Cross Reference: Weller LTB LF  
2.4mm  
10 units/case




### MS-3400 Screwdriver

Cross Reference: Weller LTC  
3.2mm  
10 units/case




### MS-3600 Screwdriver

Cross Reference: Weller LTD  
4.8mm  
10 units/case

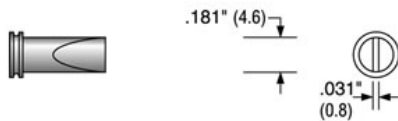


### MS-0100 SMD flow tip

Cross Reference: Weller LTGW  
2.1mm  
10 units/case




### MS-3110 Screwdriver

Cross Reference: Weller LTH  
0.8mm  
10 units/case




### MS-3101 Angled SMD

Cross Reference: Weller LTHX  
0.6mm  
10 units/case




### MS-3150 Screwdriver, long

Cross Reference: Weller LTK  
1.3mm  
10 units/case



### MS-3250 Screwdriver, long

Cross Reference: Weller LTL  
2.0mm  
10 units/case






### MS-3450 Screwdriver, long

Cross Reference: Weller LTM

3.2mm

10 units/case

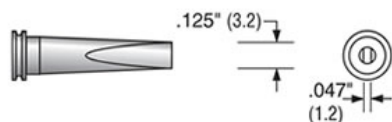

---

## Environmental Policy

Techspray is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

---

## Resources

Techspray products are supported by a global sales, technical and customer services resources.

For additional technical information on this product or other Techspray products in the United States, call the technical sales department at 800-858-4043, email [tsales@techspray.com](mailto:tsales@techspray.com) or visit our web site at: [www.techspray.com](http://www.techspray.com).

### North America

Techspray  
P.O. Box 949  
Amarillo, TX 79105  
800-858-4043  
Email: [tsales@techspray.com](mailto:tsales@techspray.com)

### Europe

ITW Contamination Control  
Saffierlaan 5  
2132 VZ Hoofddorp  
The Netherlands  
+31 88 1307 400  
Email: [info@itw-cc.com](mailto:info@itw-cc.com)

### Countries Outside US

Call to locate a distributor in your country.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

© 2016 Techspray, A Division of ITW